

Huawei.H12-425_V2.0.v2024-05-20.q200

Exam Code:	H12-425_V2.0
Exam Name:	HCIP-Data Center Facility Deployment V2.0
Certification Provider:	Huawei
Free Question Number:	200
Version:	v2024-05-20
# of views:	647
# of Questions views:	2000
https://www.freeqas.com/qa/Huawei/H12-425_V2.0/Huawei.H12-425_V2.0.v2024-05-20.q200.html	

NEW QUESTION: 1

The main unit of UPS5000-(DKVA power module) occupies a small area, saving the space of the computer room, and the area is only?

- A. 1.5 square meters
- B. 1 square meter
- C. 0.8 square meters
- D. 0.5 square meters

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 2

At present, in the design of the data center, the part () that most affects the PUE.

- A. Building Systems
- B. Power supply and distribution system
- C. Refrigeration system
- D. Decoration system

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 3

In operant conditioning, the subject is free to make responses at any time, So conditioning is measured by the rate of responding. In most other Ways, however, their forms of learning are essentially the same.

- A. When a single UPS works and loads are divided into two levels, connect the primary load to the sL terminal and thesecondary load to the pl_ terminal.
- B. When UPSs are connected in parallel, connect loads to the pL terminal.
- C. When the UPS is overloaded, the loads connected to the sL terminal will be powered off first to ensure continuous power supply to the loads connected to the pj_ terminal.

D. When a single UPS works and loads are of the same importance, connect all loads to the sL terminal.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 4

Which of the following is not the reason why the water tray of NETCOL8000-A infrared humidifier is not filled with water?

- A. The water pressure is abnormal
- B. The valve of the water inlet pipe is not open
- C. Infrared tube damage
- D. The water injection pipe is blocked

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 5

In large-scale data centers such as financial securities centers and telecom hubs. UPSs with a capacity of 200 kVA or higher are usually used. For UPS5000-E-200k, 12 V battery packs are usually configured as backup power instead of battery racks.

- A. True
- B. False

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 6

The height of the ECC800 collector is () U.

- A. 3
- B. 4
- C. 2
- D. 1

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 7

What operations can be performed in the NetEco "Report Task" interface? (Multiple choice)

- A. View Report Tasks
- B. Create report task
- C. Start the report task
- D. Stop the report task

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 8

During the use of the battery, in order to balance the capacity loss caused by the start-up and discharge of the battery, it is necessary to carry out a continuous and long-term constant voltage charging of the battery, which is called ().

- A. Charging test
- B. Self-discharge
- C. Charging
- D. Equalizing Charge

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 9

A UPS system is configured with a single 50mm "2 (209A) cable, and the maximum current capacity allowed by the system is?

- A. 174A
- B. 209A
- C. 160A
- D. 104A

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 10

During the use of the battery, in order to reduce the deterioration of the trend of voltage imbalance between batteries, it is necessary to increase the charging voltage of the battery pack, activate and charge the battery, and prolong the battery life. The maintenance method is called ().

- A. Self-discharge
- B. Float charge
- C. Charging test
- D. Equalizing Charge

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 11

The default management authority user name of the ECC800 is admin, and admin has all the authority to operate the WEB interface functions.

- A. False
- B. True

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 12

Which of the following are the accessories for UPS5000-A-400/500K? (Multiple choice)

- A. Port battery inspection instrument
- B. Dry contact expansion board
- C. Battery temperature sensor
- D. Upper air outlet assembly

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 13

How many groups of battery strings that a single UPS5000 can support? (Multiple choice)

- A. 3 groups
- B. 4 groups
- C. 1 group
- D. 2 groups

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 14

The dry contact signal of UPS5000-E does not support the remote emergency stop function.

- A. FALSE
- B. TRUE

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 15

What are the main reasons for the energy saving effect of closed cold/hot aisle? (Multiple choice)

- A. The closed hot aisle can increase the return air temperature and improve the cooling efficiency
- B. Isolate the cold air, avoid the confusion of the hot air, and improve the utilization rate of the air
- C. By increasing the supply air temperature, the amount of humidification is reduced, thereby reducing the power consumption of humidification
- D. It can increase the supply air temperature of the air conditioner, thereby reducing the energy consumption of the air conditioner

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 16

The ECC800 does not support the function of sending alarm information by email.

- A. True
- B. False

Answer: ([SHOW ANSWER](#))

Valid H12-425_V2.0 Dumps shared by PrepPdf.com for Helping Passing H12-425_V2.0 Exam!

PrepPdf.com now offer the **newest H12-425_V2.0 exam dumps**, the PrepPdf.com

H12-425_V2.0 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com H12-425_V2.0 dumps with Test Engine here:

https://www.preppdf.com/Huawei/H12-425_V2.0-prepaway-exam-dumps.html (468 Q&As

Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 17

What are the optional functions in PDU8000? (Multiple choice)

- A. Temperature Monitoring Feature Function

- B. Input switch remote tripping function
- C. 9 earthquake resistance
- D. Branch switch hot swap function

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 18

Which of the following description of UPS5000-A is correct? (Multiple choice)

- A. Tower
- B. High frequency
- C. Backup UPS
- D. Power frequency
- E. Modular
- F. Double Transform Online

Answer: A,B,F ([LEAVE A REPLY](#))

NEW QUESTION: 19

What is the channel width of Huawei FusionModule2000?

- A. 1300mm
- B. 1100mm
- C. 1200mm
- D. 1000mm

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 20

When the single cell voltage in the battery pack reaches (), it means that the battery pack is already in a risky state. (Fill in the blank)

- A. 1.67V

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 21

UPS5000-A has built-in SNMP and ModBus card to reduce the management investment cost of customers.

- A. True
- B. False

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 22

Default password of UPS2000-G operation panel is:

- A. 000001
- B. Neteco
- C. Changeme123

D. Changer

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 23


UPS5000-A supports the adjustable number of battery cells, which avoids the replacement of a whole group caused by a single battery failure, and solves the problem of difficult maintenance of traditional UPS batteries in the range of 30-40 cells.

A. False

B. True

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 24

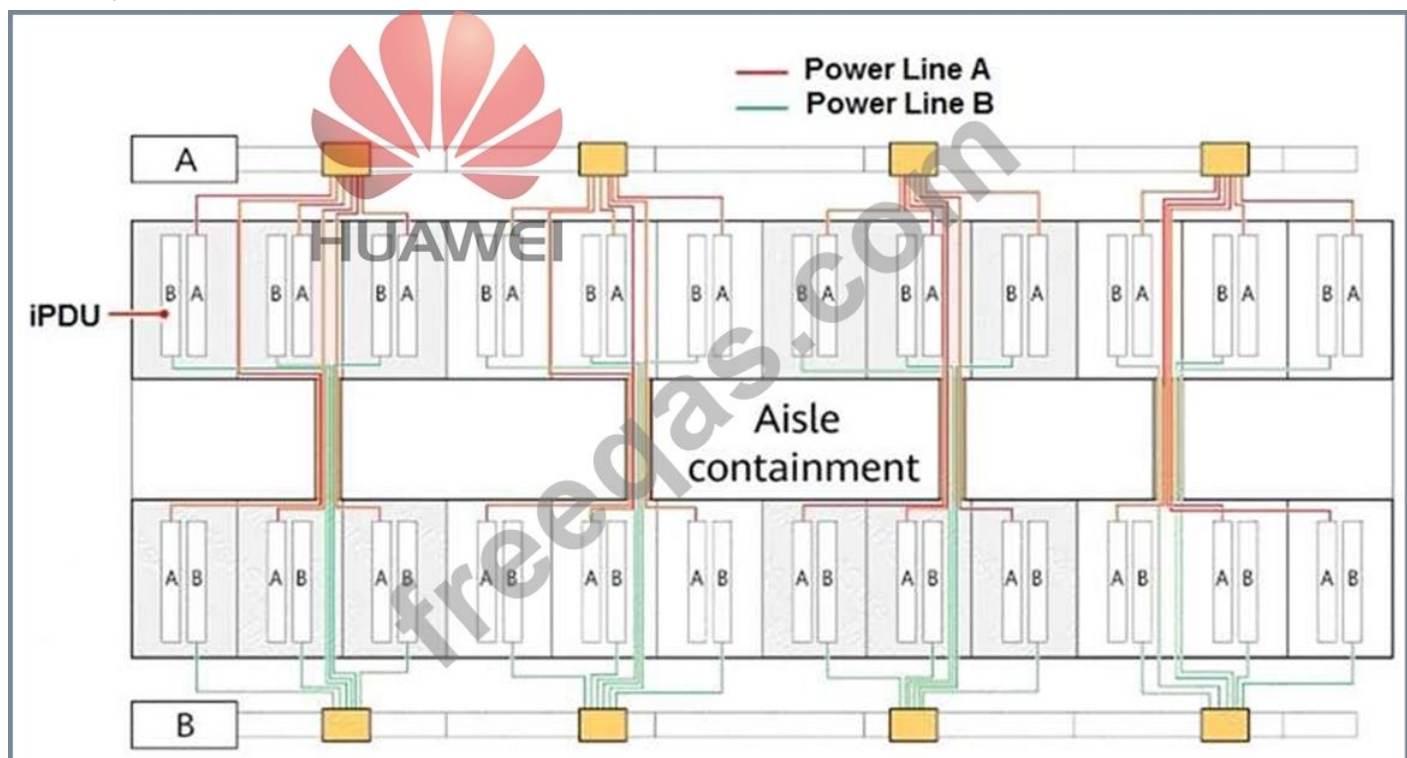

A. 2N deployment crossing rows

B. 2N deployment without crossing rows

C. N+1 deployment crossing rows

D. N+1 deployment without crossing rows

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 25

The rated voltage of the cell (CELL) in the VRLA battery is ().

A. 1V

B. 12V

C. 6V

D. 2V

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 26

Regarding the overload capacity of UPS5000-E, which of the following statements is correct?
(Multiple choice)

- A. Bypass 135% overload long-term operation
- B. Bypass 135% overload for 120 minutes
- C. Inverter 110% overload for 120 minutes
- D. Inverter 110% overload for 60 minutes

Answer: A,D ([LEAVE A REPLY](#))

NEW QUESTION: 27

What are the factors that affect the service life of the battery? (Multiple choice)

- A. Temperature
- B. Rated capacity
- C. Depth of Discharge
- D. Cycle times

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 28

What are the fire-fighting linkage functions of FusionModule2000? (Multiple choice)

- A. Channel gate magnetic power down
- B. Channel light on
- C. Sunroof Flip
- D. Air conditioner off

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 29

The power systems of FusionModule800 and FusionModule500 are 380/400/415/3Ph/50Hz and 220/230/240/1Ph/50Hz respectively.

- A. True
- B. False

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 30

The device is connected to the ECC800 monitoring system through the smart ETH socket, using the () interface of the smart FTH socket.

- A. AI/DI
- B. POE
- C. RS485
- D. FE

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 31

If a large amount of foam appears in the oil sight glass of the NETCOL9000-A compressor for a long time, it means that the degree of overheating is too high.

- A. FALSE
- B. TRUE

Answer: A ([LEAVE A REPLY](#))

Valid H12-425_V2.0 Dumps shared by PrepPdf.com for Helping Passing H12-425_V2.0 Exam! PrepPdf.com now offer the **newest H12-425_V2.0 exam dumps**, the PrepPdf.com H12-425_V2.0 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com H12-425_V2.0 dumps with Test Engine here: https://www.preppdf.com/Huawei/H12-425_V2.0-prepaway-exam-dumps.html (468 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 32

In the single cabinet configuration scenario, which of the following scenarios can be configured?

- A. FusionModule500
- B. FusionModule800
- C. FusionModule5000
- D. FusionModule2000

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 33

Which of the following functions can be achieved by modular UPS? (Multiple choice)

- A. Can be expanded online
- B. Unit price can achieve 2N redundant configuration
- C. Online hot-swappable
- D. Single machine can realize N+X redundant configuration

Answer: A,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 34

Compared with the upper air duct air supply, the upper air duct air supply has the advantages of long air supply distance and uniform air supply.

- A. FALSE
- B. TRUE

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 35

One NetCol520 chilled water distribution units can maximum support () NETCOL5000-C water-cooled row-level precision air conditioners.

- A. 12
- B. 10
- C. 6
- D. 8

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 36

In the () setting interface, you can set the linkage rules of the multi-function sensor and the sunroof.

- A. Version Information
- B. PLC
- C. WIFI management
- D. Access control user management

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 37

In NETECO's report management, which of the following types does periodic tasks have? (Multiple choice)

- A. Monthly report
- B. The Times
- C. Weekly report
- D. The Daily

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 38

If the customer has high requirements on the availability of the management system and requires that the normal use of the system is not affected by a single point of failure of the hardware, the NetEco management system can provide a high-availability solution of dual-system backup. In the dual-computer solution, what hardware resources are required by NetEco?

- A. 2 servers + 2 disk arrays + 3 switches
- B. 2 servers + 1 disk array + 1 switch
- C. 1 server + 1 t-disk array + 2 switches
- D. None of the above is true

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 39

The () air supply method is suitable for data centers with high power density of a single cabinet.

- A. Under the floor
- B. Row level
- C. Upper air supply

D. Upper air duct

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 40

Which of the following devices can be powered by the PDU8000 integrated PDF in the FusionModule2000?

- A. Chiller
- B. indoor unit of an air-cooled precision air conditioner
- C. indoor unit of a water-cooled precision air conditioner
- D. IT load

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 41

Compared with the upper air duct air supply, the upper air duct air supply has the advantages of long air supply distance and uniform air supply.

- A. TRUE
- B. FALSE

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 42

When UPS2000-G shuts down the single machine of the shutdown system, it needs to ().

- A. Perform 2 consecutive shutdown operations on the machine
- B. Only one shutdown operation is required for the machine
- C. Directly disconnect the input of the machine
- D. Shut down all UPSs in the system

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 43

In the FusionModule2000 single-row cabinet scenario, the configuration of sliding doors/electric doors is not supported.

- A. True
- B. False

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 44

To modify the plan view of the ECC800 micro-module, you need to log in to the WEB with the authority of the plumber to operate.

- A. False
- B. True

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 45

If the FusionModule800 adopts the down pipe, what is the minimum raised floor height?

- A. 100mmn
- B. 500mm
- C. 250mm

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 46

FusionModule500&FusionModule800 display brand optional ()?

- A. Blu-ray
- B. Samsung
- C. apple
- D. Huawei Honor

Answer: D ([LEAVE A REPLY](#))

Valid H12-425_V2.0 Dumps shared by PrepPdf.com for Helping Passing H12-425_V2.0 Exam! PrepPdf.com now offer the **newest H12-425_V2.0 exam dumps**, the PrepPdf.com H12-425_V2.0 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com H12-425_V2.0 dumps with Test Engine here:
https://www.preppdf.com/Huawei/H12-425_V2.0-prepaway-exam-dumps.html (468 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 47

When a single unit is working, the UPS2000G-(6~20K) can use the power-off function in stages to turn off the secondary load when overloaded or the battery power is low, and give priority to the important load.

- A. False
- B. True

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 48

When the Huawei air-cooled air-conditioning compressor is turned on for the first time, the crankcase heating belt needs to be preheated for more than () hours.

- A. 6
- B. 24
- C. 2
- D. 12

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 49

The skylight actuator can control the reversing skylight of the closed channel of the modular data center.

A. FALSE

B. TRUE

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 50

RH2288 server supports () power input.

A. 3

B. 2

C. 1

D. 4

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 51

The ECC800 does not support SMS notification of alarms and cannot realize remote maintenance.

A. True

B. False

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 52

FusionModule800 3.0 closed channel hot and cold channels are optional.

A. False

B. True

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 53

In the single cabinet configuration scenario, which of the following scenarios can be configured?

A. FusionModule2000

B. FusionModule5000

C. FusionModule800

D. FusionModule500

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 54

Through the optional battery inspection instrument, the () of the UPS battery cell can be detected.
(Multiple choice)

A. Battery case temperature

B. Voltage

C. Internal resistance

D. Frequency

Answer: A,B,C ([LEAVE A REPLY](#))

NEW QUESTION: 55

When calculating the battery capacity, the battery discharge capacity system at different backup time is the same.

A. False

B. True

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 56

The optional temperature and humidity sensor of UPS5000 does not support cascade connection.

A. True

B. False

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 57

Which of the following components does not support wireless networking?

A. ETH Converter

B. Access Control Actuator

C. Sunroof Actuator

D. AC Actuator

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 58

NETCOL9000-A100KW is a dual system, and the standard configuration is a single indoor unit connected to an outdoor unit.

A. False

B. True

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 59

What are the reasons why FusionModule500 & FusionModule800 are generally recommended to customers for typical configuration solutions? (Multiple choice)

A. Typical solutions are more competitive

B. Typical configuration solutions are better than customized solutions

C. The existing typical configuration scheme can basically cover most of the small computer room usage scenarios

D. The typical configuration scheme has a shorter lead time than the customized scheme

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 60

On the panel of the air-conditioning unit, in the group control topology diagram, the difference between this unit and other units is that there is a green frame.

- A. TRUE
- B. FALSE

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 61

Regarding the overload capacity of UPS5000-E, which of the following statements is correct?
(Multiple choice)

- A. Bypass 135% overload for 120 minutes
- B. Inverter 110% overload for 60 minutes
- C. Bypass 135% overload long-term operation
- D. Inverter 110% overload for 120 minutes

Answer: B,C ([LEAVE A REPLY](#))

Valid H12-425_V2.0 Dumps shared by PrepPdf.com for Helping Passing H12-425_V2.0 Exam!
PrepPdf.com now offer the **newest H12-425_V2.0 exam dumps**, the PrepPdf.com
H12-425_V2.0 exam **questions have been updated** and **answers have been corrected** get
the **newest** PrepPdf.com H12-425_V2.0 dumps with Test Engine here:
https://www.preppdf.com/Huawei/H12-425_V2.0-prepaway-exam-dumps.html (468 Q&As
Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 62

There is no limit to the total length of the refrigerant piping of the direct expansion air-cooled air conditioner.

- A. False
- B. True

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 63

AHU is the smallest module of 220kW under standard conditions and cannot be split.

- A. True
- B. False

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 64

The FusionModule800 does not need to be charged with refrigerant on site within 30m of the connecting pipe.

A. False

B. True

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 65

The bypass module of the UPS5000-E-200K is the same as the bypass module of the UPS5000-E-400K.

A. True

B. False

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 66

In the air-conditioning system, one of the pipe positive pressure and the pipe negative pressure can be selected.

A. False

B. True

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 67

UPS5000-A can significantly reduce the harmonic pollution to the power grid. In the case of a linear full number, the input electrical and hydraulic distortion nmi is ()

A. 0.05

B. 0.01

C. 0.03

D. 0.02

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 68

The EPO status interface of UPS5000-E can choose open or normally closed interface according to actual use.

A. TRUE

B. FALSE

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 69

The access control management function of NETECO cannot modify the door name.

A. FALSE

B. TRUE

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 70

In a project that requires the deployment of three-layer temperature cloud maps in a high-density area, () temperature probes need to be deployed in each cabinet. (Fill in the blank)

A. 3

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 71

What is the channel width of Huawei FusionModule2000?

A. 1200mm

B. 1300mm

C. 1100mm

D. 1000mm

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 72

The 2.4G antenna on ECC800 should be installed in ().

A. RF_ZA wiring port

B. RS485 port

C. DO output dry contact

D. 3G/4G antenna interface

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 73

PDU8000 precision power distribution cabinet supports the monitoring of main circuit phase current, active power, electric energy and branch circuit switch status.

A. True

B. False

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 74

Regarding the FusionModule2000 wiring, which of the following statements is wrong?

A. Cross-channel routing is through the control skylight

B. Cross-channel routing requires installation of cable ladders

C. The power distribution cabinet/integrated UPS cannot be placed at the head of the column

D. The wiring trough supports the separation of strong and weak electricity

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 75

Which is not part of the routine maintenance item of the ECC800 power module?

A. Check the ECC800 module fan

B. Create a micromodule plan view

C. Check if the power indicator light is normal

D. Check whether the power wiring is loose

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 76

Three UPS5000-E-400Ks from a 2+1 parallel system. Which of the following statements about the parallel system are true?

A. The networking mode is set to one-to-multiple for one UPS, and set to one-to-one for the other two UPSs.

B. If the load is 420 kW, each of the three UPSs carries 140kW load.

C. If the load is 420 kW, each of two UPSs carries 210 kW load, and the other one is standby and does not carry load.

D. The parallel system capacity displayed on the LCD is 1200 kVA.

Answer: ([SHOW ANSWER](#))

Valid H12-425_V2.0 Dumps shared by PrepPdf.com for Helping Passing H12-425_V2.0 Exam!

PrepPdf.com now offer the **newest H12-425_V2.0 exam dumps**, the PrepPdf.com H12-425_V2.0 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com H12-425_V2.0 dumps with Test Engine here:

https://www.preppdf.com/Huawei/H12-425_V2.0-prepaway-exam-dumps.html (468 Q&As

Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 77

() marks the fully charged battery, and discharge it to the specified termination power according to certain discharge conditions.

A. Maximum capacity

B. Rated capacity

C. Minimum Capacity

D. Actual capacity

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 78

The location of the data center needs to be evaluated () factors. (Multiple choice)

A. Cost Factors

B. Physical and Geographical Conditions

C. Ancillary facilities

D. Building structure

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 79

NETECOL can assign operation rights to user groups, or directly assign operation rights to users.

A. False

B. True

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 80

Unpredictable business, difficult expansion and investment are one of the challenges faced by traditional data center business development.

A. FALSE

B. TRUE

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 81

The 2.4G antenna on ECC800 should be installed in ().

A. RS485 port

B. RF_ZA wiring port

C. DO output dry contact

D. 3G/4G antenna interface

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 82

When the mains power is normal, what may the UPS battery in the changing mode perform?
(Multiple choice)

A. Checking Capacity Testing

B. Equalizing Charge

C. Float charge

D. Shallow discharge test

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 83

When installing the power line of UPS5000-E, if the main and side sources are different, you need to remove the bronze plate connecting the bypass and the main circuit first, and then connect the main circuit and the bypass input respectively.

A. TRUE

B. FALSE

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 84

On the ECC800-Pro WebUI, which of the following is the first-level menu of the NMS Application?

A. Maintenance

B. System Settings

C. Monitoring

D. Home

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 85

NetEco6000 management system can realize APP + intelligent inspection, greatly reducing operation and maintenance man-hours.

A. False

B. True

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 86

UPS2000-G (6-20KVA) battery discharge time is significantly lower than the standard time, what may be caused by? (Multiple choice)

A. Load increase

B. The battery is not fully charged

C. No mains input

D. Reduced battery capacity

Answer: A,B,D ([LEAVE A REPLY](#))

NEW QUESTION: 87

In the UPS5000 configurator, what are the optional module types? (Multiple choice)

A. 25k

B. 50k high efficiency

C. 50k standard effect

D. 60k

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 88

Which of the following are the characteristics of Huawei NETCOL5000-A row-level precision air conditioner cooling capacity adjustment? (Multiple choice)

A. DC inverter compressor, 20%-100% stepless adjustment of cooling capacity

B. When the load is lower than 30%, the compressor starts and stops frequently, and the valve parts move frequently and are easy to get stuck.

C. When the load is lower than 20%, the electric heating compensation is turned on, and the compressor continues to run without stopping

D. Fixed frequency compressor, no stepless adjustment of cooling capacity

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 89

Among the components of UPS5000-E, which are hot-swappable? (Multiple choice)

- A. Energy Control Sheet
- B. Dry Contact Card
- C. Power Module
- D. Bypass Module

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 90

UPS5000-E 100kVA, the input switch to be selected by the machine, which of the following is the most suitable ?

- A. 160A
- B. 200A
- C. 80A
- D. 125A

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 91

For storage batteries that have been stored for 18 months or more and have not been charged during the period, what should be dealt with?

- A. No need to deal with, use as soon as possible
- B. do scrap treatment
- C. Need to be activated, use as soon as possible
- D. Need to supplement point processing, use it as soon as possible

Answer: B ([LEAVE A REPLY](#))

Valid H12-425_V2.0 Dumps shared by PrepPdf.com for Helping Passing H12-425_V2.0 Exam! PrepPdf.com now offer the **newest H12-425_V2.0 exam dumps**, the PrepPdf.com H12-425_V2.0 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com H12-425_V2.0 dumps with Test Engine here:
https://www.preppdf.com/Huawei/H12-425_V2.0-prepaway-exam-dumps.html (468 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 92

Huawei Neteco network management supports mobile APP management.

- A. False
- B. True

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 93

UPS5000-A has built-in SNMP and ModBus card to reduce the management investment cost of customers.

A. False

B. True

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 94

One NetCol520 chilled water distribution units can maximum support () NETCOL5000-C water-cooled row-level precision air conditioners.

A. 10

B. 8

C. 12

D. 6

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 95

The FusionModule2000 battery is listed in the scene, supporting up to () battery cabinets?

A. 2

B. 4

C. 8

D. 6

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 96

Which of the following does the UPS5000-E-400K-FM input line voltage support? (Multiple choice)

A. 415V

B. 380V

C. 400V

D. 220V

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 97

In FusionModule1000B series solutions, when 2N power supply and distribution system is selected, can meet TIER4 wind power requirements.

A. False

B. True

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 98

Access to the ECC800 by wireless networking is not supported during the trial period of access control.

A. FALSE

B. TRUE

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 99

The user can log in to the WEB interface of () to view the operating status of the device in the micro-module.

A. ECC800

B. Water Immersion Sensor

C. Cabinet electronic lock

D. Sound and light alarm

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 100

ATS (Automatic Transfer Switch) must overflow the manual operating handle in the case of automatic mode.

A. True

B. False

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 101

Huawei Neteco network management supports mobile APP management.

A. True

B. False

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 102

Which of the following functions or components does the UPS6000-E (50kVA power module) come standard with? (Multiple choice)

A. Dry contact communication card

B. Bus synchronization control function

C. Parallel function

D. SNMP function

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 103

UPS5000-series modular UPS product features are similar to which of the following product models?

A. Hipulse-u

B. NXr

C. 80-NET

D. APM

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 104

The NetEco6000 management system supports access to third-party equipment and realizes centralized management of the computer room, then, when monitoring which of the following equipment is connected to third-party equipment, it is necessary to provide an RM bill and report the third-party equipment access fee?

- A. None of the above is true
- B. Huawei Power Supply TP48300
- C. Emerson Air Conditioning
- D. Huawei UPS 5000E

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 105

Which of the following air supply methods must have a reasonable raised floor height?

- A. Row-level horizontal air supply
- B. Underfloor air supply
- C. Air supply from the upper hood
- D. Upper air duct supply

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 106

Which of the characteristics of UPS5000-A regarding intelligence are correct? (Multiple choice)

- A. Support battery intelligent management, effectively prolong battery life
- B. Support NetEco monitoring software, support centralized monitoring of UPS
- C. The NetEco monitoring software of UPS5000-A supports SMS or E-mail remote alarm

Answer: ([SHOW ANSWER](#))

Valid H12-425_V2.0 Dumps shared by PrepPdf.com for Helping Passing H12-425_V2.0 Exam! PrepPdf.com now offer the **newest H12-425_V2.0 exam dumps**, the PrepPdf.com H12-425_V2.0 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com H12-425_V2.0 dumps with Test Engine here:
https://www.preppdf.com/Huawei/H12-425_V2.0-prepaway-exam-dumps.html (468 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 107

FusionModule800 can only support down pipe.

- A. True

B. False

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 108

How many 12v batteries can the optional battery inspection instrument of UPS5000-A-400/500K support?

A. 24

B. 32

C. 12

D. 40

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 109

What is the minimum outdoor ambient temperature that the FusionModule800 air conditioner can support?

A. 0 °C

B. -40 °C

C. -20 °C

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 110

UPS5000-E can maintain high efficiency in a wide load range and effectively reduce losses. Among them, the efficiency can reach 96% at 40% load, and the efficiency can reach 95% at 20% load.

What is the efficiency in ECO mode?

A. 97%

B. 96%

C. 98%

D. 99%

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 111

NetCol8000-A013U 13kW small cooling capacity temperature control product adopts DC inverter compressor.

A. True

B. False

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 112

Which of the following features are standard features of NETCOL8000-C air conditioners?

A. G4-level filter

B. Humidification function

- C. Dual power supply
- D. Water Immersion Sensor

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 113

The two ECMs of the UPS5000-E do not support active/standby switchover.

- A. False
- B. True

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 114

Which of the following models has the widest input voltage range and is more suitable for harsh power grids?

- A. Emerson NXF
- B. APC Galaxy7000
- C. Eaton 9395
- D. UPS5000-A

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 115

All fire-fighting cables running in the FusionModule1000 are covered with metal hoses, and the ends of the pipes are protected by wire sleeves to avoid damage to the fire-fighting cables in the event of a fire.

- A. True
- B. False

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 116

Which type of compressor is used in new room-level air cooling?

- A. Digital scroll compressor
- B. Fixed frequency compressor
- C. DC inverter compressor
- D. AC inverter compressor

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 117

NETCOL9000-A100KW is a dual system, and the standard configuration is a single indoor unit connected to an outdoor unit.

- A. True
- B. False

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 118

The communication option cards of UPS2000G are only MODBUS and SNMP.

A. False

B. True

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 119

Which of the following descriptions of the iPower function of the intelligent micro-module of FusionModule2000 v3.0 are correct? (Multiple choice)

A. Can monitor battery information

B. Intelligent rPDU can monitor the power consumption information of each socket

C. Power Distribution Link Visualization

D. With alarm convergence function (mains power failure scenario, alarm information collection)

Answer: A,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 120

FusionModule800 3.0 closed channel hot and cold channels are optional.

A. False

B. True

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 121

A data center is at the Tier IV level and uses Huawei FusionModule2000 smart module. In this smart module, the PDU8000 integrated PDF cannot be used to supply power to IT loads and precision air conditioners at the same time because isolation requirements are not met.

A. False

B. True

Answer: A ([LEAVE A REPLY](#))

Valid H12-425_V2.0 Dumps shared by PrepPdf.com for Helping Passing H12-425_V2.0 Exam!

PrepPdf.com now offer the **newest H12-425_V2.0 exam dumps**, the PrepPdf.com

H12-425_V2.0 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com H12-425_V2.0 dumps with Test Engine here:

https://www.preppdf.com/Huawei/H12-425_V2.0-prepaway-exam-dumps.html (468 Q&As

Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 122

The humidifier used by NETCOL8000-A is ().

- A. Infrared humidifier
- B. Wet film humidifier
- C. Electrode humidifier
- D. High pressure mist humidifier

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 123

Temperature cloud map intelligence displayed in NetEco.

- A. True
- B. False

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 124

What is the possible cause of the high discharge temperature of the NETCOL5000-A air conditioner compressor? (Multiple choice)

- A. The condenser is dirty and blocked, resulting in poor heat dissipation
- B. Refrigerant circuit or device blockage
- C. The installation position of the outdoor unit is wrong
- D. Too little refrigerant charge

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 125

The two ECMs of the UPS5000-E do not support active/standby switchover.

- A. False
- B. True

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 126

When installing a water-cooled module, what is the minimum distance between the module and the wall?

- A. 600 mm
- B. 400 mm
- C. 300 mm
- D. 500 mm

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 127

The function of the check valve in the NetCol5000-A air conditioning system is ().

- A. Controlling refrigerant flow
- B. Effective control of gas or liquid backflow
- C. Filtration of impurities in the system

D. Protect the water pump

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 128

What methods does Fusi onllodul e800 air conditioner configuration support?

A. N+1

B. N/N+1

C. N

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 129

U-position self-identification technology is used to ensure accurate placement of IT equipment.

Which feature of NetEco is this?

A. Asset Management

B. Energy Efficiency Management

C. Capacity Management

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 130

What operations can be performed in the NetEco "Report Task" interface? (Multiple choice)

A. View Report Tasks

B. Stop the report task

C. Start the report task

D. Create report task

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 131

What are the possible reasons for the failure of the humidification function of the NETCOL5000-A air conditioner? (Multiple choice)

A. Humidifier damage

B. The outdoor unit is not running

C. Humidifier circuit is not closed

D. The indoor temperature is low

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 132

What is the range of the number of battery cabinets in the FusionModule800 module?

A. 0-1

B. 0-4

C. 0-2

D. 0-3

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 133

Which type of circuit breaker used in the sub-circuit of the PDU8000 precision power distribution cabinet?

- A. Miniature circuit breakers
- B. Molded Case Circuit Breakers
- C. Frame circuit breaker
- D. Disconnect switch

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 134

When the differential pressure switch of the air filter of the indoor unit is closed, it means that the filter has too much dust and should be dealt with in time.

- A. TRUE
- B. FALSE

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 135

The form of humidifier adopted by the row-level chilled water intelligent temperature control product NetCol5000-C032H is (_____). (Fill in the blank)

Answer:

Wet film

NEW QUESTION: 136

What is the size of the screen of the air conditioner of FusionModule2000?

- A. 7 inches
- B. 9 inches
- C. 5 inches
- D. 10 inches

Answer: ([SHOW ANSWER](#)**)**

Valid H12-425_V2.0 Dumps shared by PrepPdf.com for Helping Passing H12-425_V2.0 Exam! PrepPdf.com now offer the **newest H12-425_V2.0 exam dumps**, the PrepPdf.com H12-425_V2.0 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com H12-425_V2.0 dumps with Test Engine here:
https://www.preppdf.com/Huawei/H12-425_V2.0-prepaway-exam-dumps.html (468 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 137

A project requires the management system to access two third-party generator sets (same model), one ATS (same model), six precision air conditioners (same model), and five smart meters (same model), then How many third-party device access fee does the management system need to report?

- A. 10
- B. None of the above
- C. 14
- D. 3

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 138

Which is not part of the routine maintenance item of the ECC800 power module?

- A. Create a micromodule plan view
- B. Check if the power indicator light is normal
- C. Check whether the power wiring is loose
- D. Check the ECC800 module fan

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 139

At present, in the design of the data center, the part () that most affects the PUE.

- A. Refrigeration system
- B. Building Systems
- C. Decoration system
- D. Power supply and distribution system

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 140

A single row of FusionModule2000 supports a maximum of (_____) cabinets. (Fill in the blank)

Answer:

24

NEW QUESTION: 141

The technical essential of the vacuum pumping action of the pipeline is: the degree of vacuum is not greater than () PA.

- A. 90
- B. 70
- C. 60
- D. 80

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 142

What are the i3 features of FusionModule2000 V3.0 include? (Multiple choice)

- A. iCooling
- B. iPower
- C. iManager

Answer: A,B,C ([LEAVE A REPLY](#))

NEW QUESTION: 143

What methods does the FusionModule800 power input support?

- A. Two-way
- B. One-way
- C. Single or Dual

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 144

The communication option cards of UPS2000G are only MODBUS and SNMP.

- A. False
- B. True

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 145

UPS5000-E (25-125kVA) does not support the Battery function.

- A. True
- B. False

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 146

When Huawei air-cooled air conditioner is installed, the required time for maintaining positive pressure in the refrigerant pipeline is () hours.

- A. 8
- B. 36
- C. 12
- D. 24

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 147

The recommended installation location of the smart ETH socket is ().

- A. Inside the network cabinet
- B. The side of the cable trough at the top of the cabinet
- C. Inside the lintel
- D. Control the sunroof

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 148

What specifications does the FusionModule500 UPS have? (Multiple choice)

- A. 15KVA
- B. 6KVA
- C. 3KVA
- D. 10KVA

Answer: B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 149

Regarding the FusionModule2000 wiring, which of the following statements is wrong?

- A. The wiring trough supports the separation of strong and weak electricity
- B. Cross-channel routing is through the control skylight
- C. The power distribution cabinet/integrated UPS cannot be placed at the head of the column
- D. Cross-channel routing requires installation of cable ladders

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 150

The anti-seismic components of UPS5000 are suitable for earthquake-prone areas, and can effectively support cabinets and prevent cabinets from tipping when earthquakes with intensity 9 or below occur.

- A. False
- B. True

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 151

Huawei Technologies Co., Ltd. is GB50174-2008 standard is (), GB50174-2017 standard is ()

- A. Participating units, auditing units
- B. Review unit, participating unit
- C. audit unit, audit unit
- D. Participating units, participating units

Answer: ([SHOW ANSWER](#)**)**

Valid H12-425_V2.0 Dumps shared by PrepPdf.com for Helping Passing H12-425_V2.0 Exam! PrepPdf.com now offer the **newest H12-425_V2.0 exam dumps**, the PrepPdf.com H12-425_V2.0 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com H12-425_V2.0 dumps with Test Engine here:

NEW QUESTION: 152

Which of the following are the basic functions of NETECO? (Multiple choice)

- A. Report Management
- B. User Management
- C. Video Management
- D. Access Management

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 153

FusionModule500&FusionModule800 display brand optional ()?

- A. Samsung
- B. Blu-ray
- C. apple
- D. Huawei Honor

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 154

A system is configured with 5H battery backup time, and the discharge termination voltage of the battery cell should select?

- A. 1.80V
- B. 1.60V
- C. 1.67V
- D. 1.75V

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 155

Which of the FusionModule800 needs on-site construction survey? (Multiple choice)

- A. Wiring method
- B. Length between inside and outside machine
- C. The way of the pipe
- D. Mains to Module Cable Length

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 156

The UPS5000-E power chess block adopts a fan fault-tolerant design. When one of the fans is damaged, what percentage of the power module can still be loaded?

- A. 0.3
- B. 0.6

- C. 0.5
- D. 0.25

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 157

What is the reasonable exhaust pressure range for NETCOL5000-A in MPA? (Multiple choice)

- A. 1.5-3.1 (15-35 °)
- B. 3.1-4.15 (above 45 °)
- C. 1.5-2.5 (below 15 °)
- D. 2.5-3.8 (35-45 °)

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 158

Which of the following functions can be achieved by modular UPS? (Multiple choice)

- A. Unit price can achieve 2N redundant configuration
- B. Single machine can realize N+X redundant configuration
- C. Online hot-swappable
- D. Can be expanded online

Answer: B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 159

Which of the following measures does the NetEco management system take to ensure the security of the software platform and prevent the leakage of business sensitive data? (Multiple choice)

- A. User password is encrypted
- B. The transmission channel between the management system and the collector adopts encrypted transmission mode
- C. Security reinforcement and vulnerability prevention for operating systems, databases, and management systems
- D. The management system passes the security scan of anti-virus software

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 160

In the parallel steps of the UPS5000-E, the reason for using the EPO status interface is ().

- A. Power down the load to prevent damage to the load equipment
- B. Prevent static electricity and protect personal safety
- C. Cut off the output and set the parallel parameters
- D. Protect the battery from static electricity

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 161

If the battery charge current limit coefficient of the UPS5000-E is set to 0.1C10, which of the following statements about this parameter is true?

- A. The battery float charge current is 0.1C10.
- B. The maximum battery charge current is 0.1C10.
- C. The maximum batten/ charge current is 0.1C10.
- D. The batten/ charge current is always 0.1C10.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 162

Regarding the cabinet rPDU of FusionModule2000, which of the following statements is false?

- A. Support C13 and C19 and national standard sockets
- B. Smart rPDU supports remote monitoring, but does not support remote shutdown
- C. There are half height and full height

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 163

To configure the UPS system plan, which of the following factors need to be considered in the plan? (Multiple choice)

- A. The brand and capacity of the battery
- B. Configuration of battery rack and battery switch box
- C. Make and model of AC and DC cables
- D. UPS model, capacity and parallel mode

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 164

When NETCOL5000-C is debugging the drainage equipment, lift the float by hand for 5 seconds. In this case, the dual water pumps are turned on at the same time, and an abnormal drainage alarm will appear.

- A. TRUE
- B. FALSE

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 165

All fire-fighting cables running in the FusionModule1000 are covered with metal hoses, and the ends of the pipes are protected by wire sleeves to avoid damage to the fire-fighting cables in the event of a fire.

- A. True
- B. False

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 166

FusionModule500 uses natural heat dissipation.

A. True

B. False

Answer: ([SHOW ANSWER](#))

Valid H12-425_V2.0 Dumps shared by PrepPdf.com for Helping Passing H12-425_V2.0 Exam! PrepPdf.com now offer the **newest H12-425_V2.0 exam dumps**, the PrepPdf.com H12-425_V2.0 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com H12-425_V2.0 dumps with Test Engine here:
https://www.preppdf.com/Huawei/H12-425_V2.0-prepaway-exam-dumps.html (468 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 167

A single row of FusionModule2000 supports a maximum of () cabinets. (Fill in the blank)

A. 24

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 168

Regarding the circuit breaker statement, which of the following are correct? (Multiple choice)

A. The leakage protection circuit breaker is not recommended to be used in the front end of the UPS system

B. The isolating switch and the circuit breaker play the same role in the system

C. The circuit breaker mainly plays the dual role of isolation and protection in the system

D. When selecting circuit breakers, do not consider redundancy

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 169

In UPS, corresponding to 50k modules, the maximum output capacity of a single UPS is?

A. 500kVA

B. 800kVA

C. 600kVA

D. 400kVA

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 170

UPS5000-A-400/500K can support up to () parallel machine with good scalability.

A. 6

B. 2

C. 4

D. 3

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 171

Which of the following functions does PDU8000 precision power distribution cabinet mainly have? (Multiple choice)

- A. The precision power distribution cabinet supports SNMP and MODBUS communication, which can transmit information to the intelligent monitoring system.
- B. Protection function of the lower line and equipment of the precision power distribution cabinet
- C. Abnormal alarm function of main circuit and sub-circuit of precision power distribution cabinet
- D. Main circuit and sub-circuit metering function of precision power distribution cabinet
- E. Power distribution function of data center micro-module (cabinet)

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 172

Which air supply mode requires reasonable raised floor height?

- A. Underfloor air supply mode
- B. In-row horizontal air supply mode
- C. Air supply mode using wind pipe
- D. Air supply mode using blast caps.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 173

When releasing fire in the FusionModule1000 box, the air release indicator will display the words "Do not enter the air release", which is used to warn the on-site personnel not to enter the air release protection zone.

- A. FALSE
- B. TRUE

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 174

What are the certifications of FusionModule500&FusionModule800? (Multiple choice)

- A. Air conditioner: CCC/CE/REACH/ROHS
- B. Air conditioner: REACH/ROHS
- C. Integrated cabinet: CE/CCC/ROHS
- D. Integrated cabinet: CE/REACH/ROHSO

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 175

The multi-function sensor in the modular channel of Fusion Module2000 can be connected to the () component.

- A. WIFI converter
- B. Access Control Actuator
- C. Only ETH socket
- D. Cabinet collector

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 176

FusionModule500 uses natural heat dissipation.

- A. True
- B. False

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 177

FusionModule800 can only support down pipe.

- A. False
- B. True

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 178

In the process of disconnecting the battery pack switch, if there are multiple sets of batteries, first disconnect the main switch between the battery pack and the UPS, and then disconnect the switch of each battery pack.

- A. TRUE
- B. FALSE

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 179

Which of the following are the difference between traditional power frequency machine and high frequency machine? (Multiple choice)

- A. All of the above are true
- B. Different rectification methods
- C. Different types of bypass devices
- D. The output must have a built-in step-up transformer

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 180

Which manufacturers have 50KVA power modules? (Multiple choice)

- A. INVT
- B. Emerson
- C. Schneider
- D. Huawei

Answer: A,D ([LEAVE A REPLY](#))

NEW QUESTION: 181

The ECC800 is the core component of local management of the micro-module, and the access of its southbound components can be extended through the POE bus.

- A. True
- B. False

Answer: A ([LEAVE A REPLY](#))

Valid H12-425_V2.0 Dumps shared by PrepPdf.com for Helping Passing H12-425_V2.0 Exam! PrepPdf.com now offer the **newest H12-425_V2.0 exam dumps**, the PrepPdf.com H12-425_V2.0 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com H12-425_V2.0 dumps with Test Engine here:
https://www.preppdf.com/Huawei/H12-425_V2.0-prepaway-exam-dumps.html (468 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 182

What is the maximum capacity of the power module of the UPS5000-E?

- A. 50kVA
- B. 20kVA
- C. 40kVA
- D. 30kVA

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 183

BCB-BOX is an optional part of UPS5000-E, used for connection control between battery pack and UPS system, with overload, short circuit protection and remote management tripping functions.

- A. True
- B. False

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 184

When a user uses the NETECC APP on the PAD to query the PUE information in the current computer room, he needs to click the () menu.

- A. Monitoring
- B. Energy consumption
- C. Alert
- D. more

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 185

The NetEco6000 management system can provide monitoring of the cooling power system, which of the following functions can it provide? (Multiple choice)

- A. Support the display of key equipment indicators on the power distribution topology diagram, so that users can understand the operating status of the system and important nodes
- B. The power distribution system topology diagram can be provided, and the power distribution system diagram of the entire computer room can be displayed
- C. It can provide the topological diagram of the chilled water system, showing the operation status of the whole system
- D. None of the above is supported

Answer: A,B,C ([LEAVE A REPLY](#))

NEW QUESTION: 186

Two UPS5000-E (50kVA power modules) 150kVA, rack 1+1 redundancy, in the total input power cabinet, the required total input switch is ()

- A. 250A
- B. 500A
- C. 320A
- D. 630A

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 187

NetCol8000-A013U 13kW small cooling capacity temperature control product adopts DC inverter compressor.

- A. True
- B. False

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 188

The access control management function of the Netco6000 management system only supports one-way card swiping (you need to swipe your card to enter the door, and press the exit button to go out), but do not support two-way card swipe (you need to swipe your card to enter the door and go out).

- A. False
- B. True

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 189

When the NETCOL5000-A air conditioner is turned on for commissioning, the possible cause of the exhaust high pressure alarm, which is incorrect?

- A. Too much cold dish charge
- B. Too little cold dish charge
- C. The outdoor fan cannot be started
- D. Outdoor fan speed pot bottom

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 190

If a large amount of foam appears in the oil sight glass of the NETCOL9000-A compressor for a long time, it means that the degree of overheating is too high.

- A. FALSE
- B. TRUE

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 191

Which of the following fan control modes are supported by NetCo18000-C series room-level chilled water intelligent cooling products? (Multiple choice)

- A. Supply air control
- B. Return air control
- C. Pressure Control
- D. Mixed air control
- E. Differential pressure control

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 192

When there are multiple computer rooms and they are monitored at the same time, the hierarchical deployment of the monitoring system may occur.

- A. FALSE
- B. TRUE

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 193

If the customer's load cannot be powered off, what should be paid attention when closing the maintenance bypass switch? (Multiple choice)

- A. Execute EPO before closing the maintenance switch
- B. Close the maintenance switch first and then execute the EPO
- C. Turn off the inverter, put the UPS in bypass mode and then close the wake bypass switch
- D. The maintenance bypass switch can also be closed in inverter power supply mode

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 194

The function of the check valve in the NetCol5000-A air conditioning system is ().

- A. Filtration of impurities in the system
- B. Effective control of gas or liquid backflow
- C. Controlling refrigerant flow
- D. Protect the water pump

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 195

The output power factor of UPS5000-A-400/500K is (), which is suitable for new IT loads and significantly improves the load capacity of the system.

- A. 0.9
- B. 0.8
- C. 1
- D. 0.95

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 196

The UPS5000-E battery adopts the design of no center line, which is convenient to replace the old battery when the tower machine is replaced.

- A. True
- B. False

Answer: B ([LEAVE A REPLY](#))

Valid H12-425_V2.0 Dumps shared by PrepPdf.com for Helping Passing H12-425_V2.0 Exam! PrepPdf.com now offer the **newest H12-425_V2.0 exam dumps**, the PrepPdf.com H12-425_V2.0 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com H12-425_V2.0 dumps with Test Engine here:
https://www.preppdf.com/Huawei/H12-425_V2.0-prepaway-exam-dumps.html (468 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 197

UPS2000-A-(1-3KVA) close the mains input switch and directly enter the bypass working state.

- A. FALSE
- B. TRUE

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 198

The UPS can generate large leakage currents. A circuit breaker equipped with a residual current device (RCD) is not recommended. If leakage protection is required, consider the leakage current of the UPS and downstream devices.

A. False

B. True

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 199

A system is configured with 5H battery backup time, and the discharge termination voltage of the battery cell should select?

A. 1.67V

B. 1.75V

C. 1.60V

D. 1.80V

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 200

A system is configured with 15min battery backup time, and the discharge termination voltage of the battery cell should select?

A. 1.80V

B. 1.60V

C. 1.75V

D. 1.67V

Answer: C ([LEAVE A REPLY](#))

Valid H12-425_V2.0 Dumps shared by PrepPdf.com for Helping Passing H12-425_V2.0 Exam! PrepPdf.com now offer the **newest H12-425_V2.0 exam dumps**, the PrepPdf.com H12-425_V2.0 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com H12-425_V2.0 dumps with Test Engine here:
https://www.preppdf.com/Huawei/H12-425_V2.0-prepaway-exam-dumps.html (468 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)