

Cisco.300-810.v2022-07-01.q135

Exam Code:	300-810
Exam Name:	Implementing Cisco Collaboration Applications
Certification Provider:	Cisco
Free Question Number:	135
Version:	v2022-07-01
# of views:	2512
# of Questions views:	1350
https://www.freeqas.com/qa/Cisco/300-810/Cisco.300-810.v2022-07-01.q135.html	

NEW QUESTION: 1

Fraudulent calls are being made from Cisco Unity Connection. Which action prevents the calls from reaching the PSTN using SCCP integration?

- A. Change the configuration of the routing rule.
- B. Change the CSS of the voicemail port.
- C. Change the Rerouting CSS on the trunk to Cisco Unity Connection.
- D. Remove values from restriction table.

Answer: B (LEAVE A REPLY)

Reference:

<https://www.cisco.com/c/en/us/support/docs/unified-communications/unity-connection/119337-technote-cuc-00.html>

NEW QUESTION: 2

Which Cisco Unified Connections Manager service is required for users to control their desk phones using Cisco Jabber?

- A. Cisco CTIManager
- B. Cisco CTL Provider
- C. Cisco Presence Engine
- D. Cisco Serviceability Reporter

Answer: (SHOW ANSWER)

Explanation/Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/jabber/11_5/CJAB_BK_D00D8CBD_00_deployment-installation-guide-cisco-jabber115/CJAB_BK_D00D8CBD_00_deployment-installation-guide-cisco-jabber115_chapter_0111.html

NEW QUESTION: 3

Refer to the exhibit.

High Availability			
<input checked="" type="checkbox"/> Enable High Availability			
Monitored Server	Assigned Users	Active Users	Server State
IMPPub.CiscoLiveUS.net	4	0	Initializing
IMPSub.CiscoLiveUS.net	0	0	Initializing

After configuration of the Cisco IM&P cluster in high-availability mode, both IM&P servers remain in the initializing state. Which two actions ensure normal operations of this IM&P high-availability cluster? (Choose two.)

- A. Clear the Enable High Availability check box in the Presence Redundancy Group configuration.
- B. Confirm that Cisco Presence Engine, Cisco XCP Router, and Cisco DB services are up and running on both IM&P servers.
- C. Restart the Server Recovery Manager service in Cisco Unified Serviceability - Network Services on both IM&P servers.
- D. Verify that the Cisco XCP SIP Federation Connection Manager service is running.
- E. Ensure that an equal number of users are assigned to each IM&P server.

Answer: (SHOW ANSWER)

Explanation/Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/im_presence/configAdminGuide/10_5_1/CUP0_BK_CE43108E_00_config-admin-guide-imp-105/CUP0_BK_CE43108E_00_config-admin-guide-imp-105_chapter_010010.html

NEW QUESTION: 4

Refer to the exhibit.



Which action allows a remote Cisco Jabber user utilizing Mobile and Remote Access to automatically log in to a Cisco Unity Connection voicemail box via OAuth?

- A. Add CUCM under System Settings > Authz Servers in Cisco Unity Connection.
- B. Add CUCM under System Settings > Authz Servers in Cisco Expressway-C.
- C. Add CUCM under System Settings > Authz Servers in Cisco Expressway-E.
- D. Add CUCM under System Settings > Authz Servers in Cisco Unity.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 5

The persistent chat feature is configured in a Cisco Jabber deployment that is running Cisco Unified IM and Presence 11.5 SU6 Desktop clients are working but mobile clients are not displaying persistent chats. Which configuration is necessary to enable the Jabber persistent chat feature on mobile devices?

- A. add "Enable_Persistent_Chat" in the "Cisco Support Field" on the Jabber for mobile device configuration page on Cisco UCM
- B. while logged into IM and Presence server Administration, go to 'Messaging', then Settings", and check the checkbox for the 'Enable persistent chat for mobile" field
- C. add the <Persistent_Chat_Enable>true</Persistent_Chat_Enabled> line to the Jabber configuration rule that is used by mobile devices
- D. add the <Persistent_Chat_Mobile_Enabled>>false</Persistent_Chat_Mobile_Enabled> line to the Jabber configuration file that is used by all Jabber devices

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 6

Fraudulent calls are being made from Cisco Unity Connection. Which action prevents the calls from reaching the PSTN using SCCP integration?

- A. Change the configuration of the routing rule.
- B. Change the CSS of the voicemail port.
- C. Change the Rerouting CSS on the trunk to Cisco Unity Connection.
- D. Remove values from restriction table.

Answer: ([SHOW ANSWER](#))

Explanation/Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/unity-connection/119337-technote-cuc-00.html>

NEW QUESTION: 7


Which component of SAML SSO defines the transport mechanism that is used to deliver the SAML messages between entities?

- A. metadata
- B. bindings
- C. assertions
- D. profiles


Answer: ([SHOW ANSWER](#))

NEW QUESTION: 8

Drag and drop the steps from the left into the correct order on the right that describes the flow of presence updates when a user manually sets the presence status in Cisco Jabber. Not all options are used.

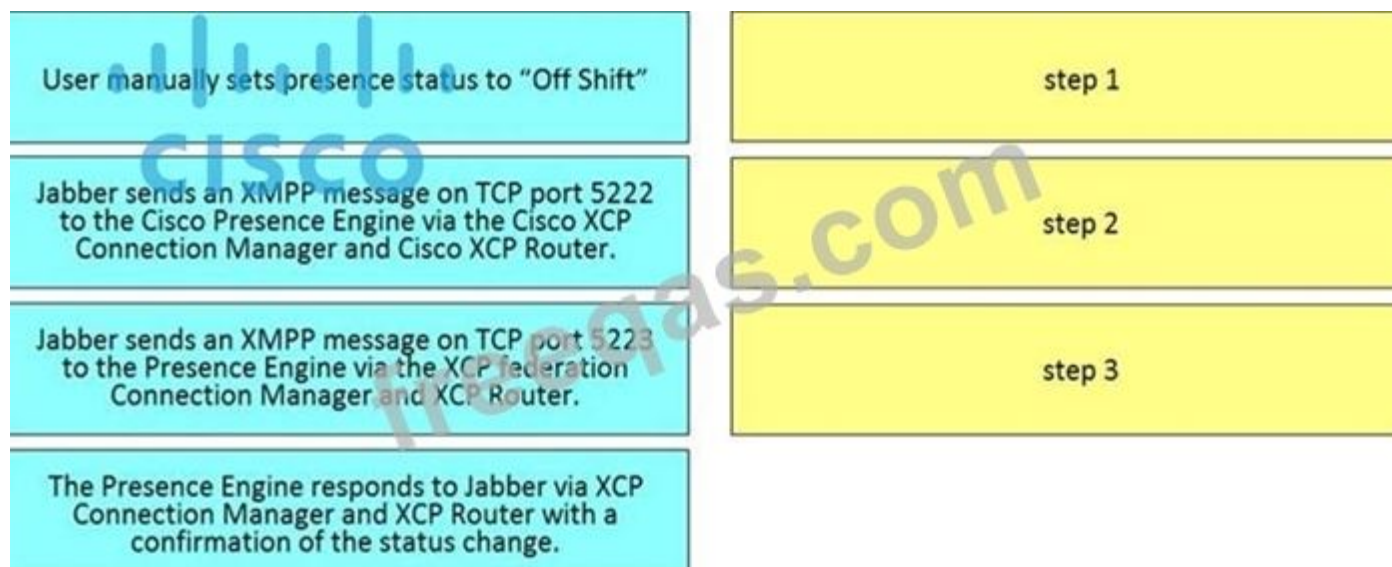

Answer:

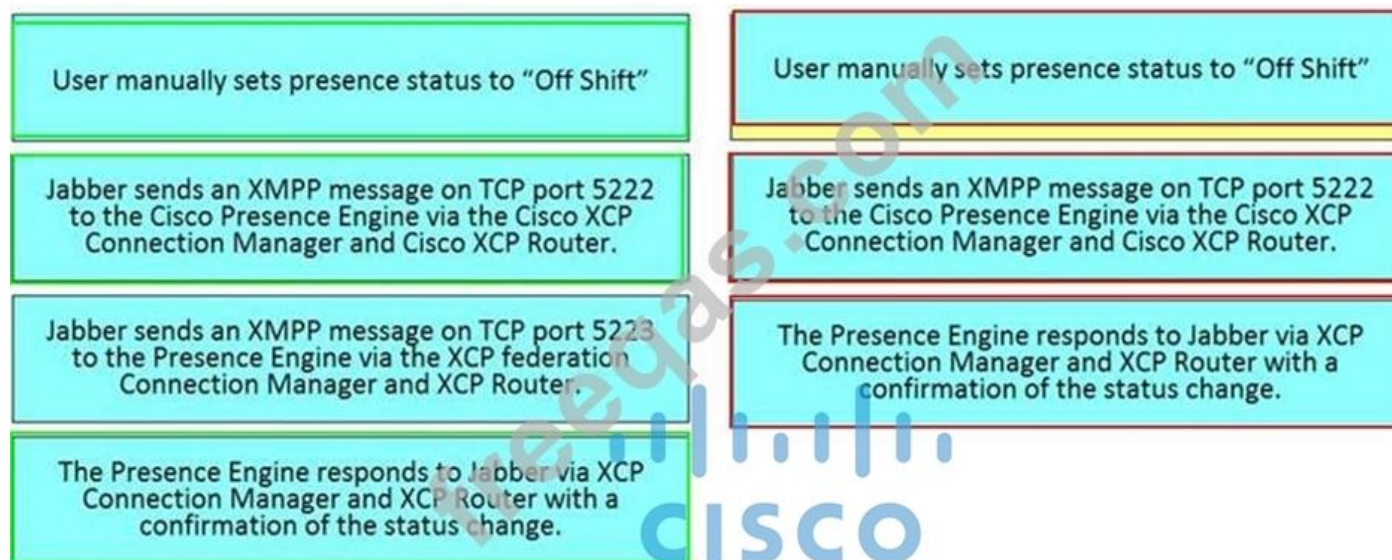

NEW QUESTION: 9

A customer is using Cisco Unified IM and Presence with high availability and has reported that their primary node is not providing any IM and Presence services. What is causing this issue?

- A. The presence redundancy group node state of the primary node is "idle".
- B. The presence redundancy group node state of the primary node is "initializing".
- C. The presence redundancy group node state of the peer node is "normal".
- D. The presence redundancy group node state of the peer node is "running in backup mode".

Answer: B (LEAVE A REPLY)

NEW QUESTION: 10

In the integration of Cisco Unity Connection using SIP, which SIP trunk security profile option is required for MWI to work correctly?

- A. Accept presence subscription
- B. Accept unsolicited notification
- C. Accept out-of-dialog refer
- D. Accept replaces header

Answer: (SHOW ANSWER)

NEW QUESTION: 11

Which statement describes a role of AXL communications in the BLF Plug-in Service of the Cisco Unified Attendant Console?

- A. The AXL communications allow registered attendants to log in to Cisco Unified Communications Manager and receive calls.
- B. The AXL communications is required after installation to verify that the specified CTI manager or managers and Cisco Unified Attendant Console versions match.
- C. The AXL communications is required after installation to verify that the specified CTI manager or managers and Cisco Unified CM versions.
- D. The AXL communications enable Device Resolution Manager to resolve the device statuses of operator and system devices.

Answer: C (LEAVE A REPLY)

NEW QUESTION: 12

Which SAML component specifies the mapping of SAML assertion protocol message exchanges with standard messaging formats or communication protocols such as SOAP exchanges?

- A. SAML binding
- B. SAML assertion
- C. SAML profiles
- D. SAML protocol

Answer: (SHOW ANSWER)

Explanation/Reference: https://en.wikipedia.org/wiki/Security_Assertion_Markup_Language

NEW QUESTION: 13

A Cisco Unified IM and Presence version 11.5.1 on-premises deployment of instant messaging with a capacity of 50,000 users includes the multiple device messaging feature. Each of the 30,000 users has 3 Jabber clients. The customer reports that messages are not being received on all 3 clients. What should the administrator do to resolve this issue?

- A. Increase capacity to 30,000 users to match the number of Jabber clients.
- B. Increase capacity to 90,000+ to match the number of Jabber clients.
- C. Increase capacity to 72,000 users to service all Jabber clients.
- D. Increase capacity to 60,000 users to service all Jabber clients.

Answer: (SHOW ANSWER)

NEW QUESTION: 14

To redirect calls from the phone extension for user A to the voicemail greeting, which call routing rule should be used in Cisco Unity Connection?

- A. Attempt Forward forwarded routing rule
- B. Opening Greeting direct routing rule
- C. Attempt Sign-In direct routing rule
- D. Opening Greeting forwarded routing rule

Answer: A (LEAVE A REPLY)

Reference:

<https://community.cisco.com/t5/collaboration-voice-and-video/unity-connection-call-routing-logic/ta-p/3162560>

NEW QUESTION: 15

Refer to the exhibit.

```
[csf.cert.] [csf::cert::BaseCertVerifier:doVerifyCertificate] - About to verify the certificate.
[csf.cert.win32] [csf::cert::Win32CertVerifier:loadCertificateChain] - Certificate Chain status 0x20
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifySslPolicy] - Ignoring errors due to Invalid CN
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifyPolicies] - SSL Policy status 0x2148204809
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifyPolicies] - Basic Constraints Policy status 0x0
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifyCertificate] - Certificate validation response is 'invalid'
[csf.cert.] [csf::cert::BaseCertVerifier:doVerifyCertificate] - Result of platform cert verification: [UNTRUSTED_ROOT]
[csf.cert.] [csf::cert::BaseCertVerifier:checkIdentity] - About to check for an Identity Match.
[csf.cert.xmpp] [csf::cert::XmppCertVerifier:checkIdentifier] - Verifying XMPP Identity 'example.com'
[csf.cert.utils] [csf::cert::AltNameParserImpl:verifyXmpp] - Xmpp match was not found for: 'example.com'
[csf.cert.utils] [csf::cert::AltNameParserImpl:verify] - Match for 'example.com' found in dnsNames index: 1
[csf.cert.] [csf::cert::BaseCertVerifier:checkIdentifiers] - Verification of identity succeeded. Matched identifier : 'example.com'
[csf.diagnostics] [CSFDiagnosticsImpl::AddRecord] - Add record task enqueued: example.com
[csf.common.PolicySet] [csf::common:PolicySet::getPolicy] - Successfully found Policy with nature IGNORE_INVALID_CERT_CONDITION
[IGNORE_REVOCATION_INFO_UNAVAILABLE_ERRORS]
[csf.cert.] [csf::cert::BaseCertVerifier::applyIgnoreInvalidCertConditionPolicy] - About to enforce ignore invalid cert condition policy.
[csf.cert] [csf::cert::IgnoreInvalidCertConditionPolicy::removeIgnoredStatuses] - No statuses have been removed from the verification status.
[csf.cert] [csf::cert::IgnoreInvalidCertConditionPolicy::enforce] - Policy enforced
[csf.cert.] [csf::cert::BaseCertVerifier:verifyCertificateAsync] - Certificate initially verified, result: FAILURE
[csf.cert] [csf::cert::CertificateDataImpl::parseSubjectCNField] - size of Subject CN field : 16
[csf.cert] [csf::cert::CertificateDataImpl::parseSubjectCNField] - Subject CN field : impa.example.com
[csf.common.PolicySet] [csf::common:PolicySet::getPolicy] - Successfully found Policy with nature INVALID_CERT_MANAGEMENT [PROMPT_USER]
```

Users report that they are prompted to accept server certificates when they initially run Cisco Jabber. An engineer removes these prompts to prevent confusion. Which statement about this scenario is true?

- A. These certificates are self-signed certificates, so they must be added manually to the user OS certificate stores.
- B. Nothing can be done to resolve this issue because certificates must be accepted by each Jabber user, per Cisco policy.
- C. The behavior is a security breach because certificates are considered untrusted and as not coming from Cisco Collaboration servers.
- D. Presentation of the certificates can be disabled by setting up Cisco IM&P servers into nonsecure mode.

Answer: A (LEAVE A REPLY)

NEW QUESTION: 16

Refer to the exhibit.

```
2014-11-07 09:39:53, 855 ERROR [0X0000298] [ice\TelephonyAdapterPhoneDevice.cpp(178)] [TelephonyAdppter]
[TelephonyAdapter::selectDeviceImpl] - switchMode to device [SEP84802D7698D6] failed with error
[eDeviceRegCouldNotOpenDevice]
```

Which end-user option can resolve this issue?

- A. Standard CTI Reception of SRTP Key Material
- B. Standard CTI Allow Calling Number Modification
- C. Standard CTI Allow Control of Phones Supporting Rollover Mode
- D. Standard CTI Allow Call Monitoring

Answer: C (LEAVE A REPLY)

<https://community.cisco.com/t5/collaboration-applications/jabber-for-windows-cannot-control-8841-desk-phone/td-p/2569503>

Valid **300-810 Dumps** shared by PrepPdf.com for Helping Passing 300-810 Exam! PrepPdf.com now offer the **newest 300-810 exam dumps**, the PrepPdf.com 300-810 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com 300-810 dumps with Test Engine here: <https://www.preppdf.com/Cisco/300-810-prepaway-exam-dumps.html> (314 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 17

Refer to the exhibit.

```
Users with Duplicate User IDs
-----
User ID : user3
Node Name
cucm-imp-1
cucm-imp-2
```

Which two steps resolve the "Users with Duplicate User IDs" message? (Choose two.)

- A. Rename the directory URI value for one of the users to ensure that there is no duplication.
- B. Rename the User ID value for one user if different users on different clusters have the same User ID assigned.
- C. Unassign a user from one of the clusters when the same user is assigned to two different clusters.
- D. Assign the duplicate user to the secondary Cisco IM and Presence node.
- E. Delete the user ID for the duplicate user ID.

Answer: (SHOW ANSWER)

Explanation/Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/im_presence/configAdminGuide/10_0_1/CUP0_BK_C318987B_00_config-admin-guide-imp-100/CUP0_BK_C318987B_00_config-admin-guide-imp-100_chapter_010101.html

NEW QUESTION: 18

Refer to the exhibit.



A Jabber user is unable to access voicemail. During troubleshooting, an administrator captures this screenshot. What are the two ways to resolve this issue? (Choose two.)

- A. Ensure the user is not locally created on Cisco Unity Connection with a password expiring separately from the password that is used for Jabber.
- B. Make sure the Jabber service profile created in Cisco UCM contains Unity Connection UC service with a voicemail server configured.

- C. Ask the user to click on the "Connect to a device" button and use the correct username and password.
- D. Ask an administrator to create an account for this user in Cisco Unity Connection but remove the Unity Connection UC service from the Cisco UCM Jabber service profile.
- E. Check if "OAuth with Refresh Login Flow" is enabled on Cisco Unity Connection but disabled in Cisco UCM.

Answer: (SHOW ANSWER)

NEW QUESTION: 19

Drag and drop the steps from the left into the correct order on the right that describes the flow of presence updates when a user manually sets the presence status in Cisco Jabber. Not all options are used.

User manually sets presence status to "Off Shift"	step 1
Jabber sends an XMPP message on TCP port 5222 to the Cisco Presence Engine via the Cisco XCP Connection Manager and Cisco XCP Router.	step 2
Jabber sends an XMPP message on TCP port 5223 to the Presence Engine via the XCP federation Connection Manager and XCP Router.	step 3
The Presence Engine responds to Jabber via XCP Connection Manager and XCP Router with a confirmation of the status change.	

Answer:

User manually sets presence status to "Off Shift"	User manually sets presence status to "Off Shift"
Jabber sends an XMPP message on TCP port 5222 to the Cisco Presence Engine via the Cisco XCP Connection Manager and Cisco XCP Router.	Jabber sends an XMPP message on TCP port 5223 to the Presence Engine via the XCP federation Connection Manager and XCP Router.
Jabber sends an XMPP message on TCP port 5223 to the Presence Engine via the XCP federation Connection Manager and XCP Router.	The Presence Engine responds to Jabber via XCP Connection Manager and XCP Router with a confirmation of the status change.
The Presence Engine responds to Jabber via XCP Connection Manager and XCP Router with a confirmation of the status change.	

User manually sets presence status to "Off Shift"

Jabber sends an XMPP message on TCP port 5223 to the Presence Engine via the XCP federation Connection Manager and XCP Router.

The Presence Engine responds to Jabber via XCP Connection Manager and XCP Router with a confirmation of the status change.

NEW QUESTION: 20

Which statement about SIP federation between Cisco Unified Communications IM and Presence and Microsoft Skype for Business is true?

- A. Add the federated user as a contact in Jabber to view its presence status.
- B. The role of SIP Proxy service is to process the XMPP packet in from Jabber and convert it to SIP.
- C. TLS is optional.
- D. Use of directory URI as an IM addressing scheme is not supported.

Answer: (SHOW ANSWER)

Explanation/Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/im_presence/interdomain_federation/12_5_1/cup0_b_interdomain-federation-1251/cup0_b_interdomain-federation-1251_chapter_01000.html

NEW QUESTION: 21

Refer to the exhibit.

```
2014-11-07 09:39:53, 855 ERROR [0X00000298] [ice\TelephonyAdapterPhoneDevice.cpp(178)] [TelephonyAdppter]
[TelephonyAdapter::selectDeviceImpl] - switchMode to device [SEP84802D7698D6] failed with error
[eDeviceRegCouldNotOpenDevice]
```

Which end-user option can resolve this issue?

- A. Standard CTI Allow Control of Phones Supporting Rollover Mode
- B. Standard CTI Reception of SRTP Key Material
- C. Standard CTI Allow Call Monitoring
- D. Standard CTI Allow Calling Number Modification

Answer: A (LEAVE A REPLY)

NEW QUESTION: 22

Refer to the exhibit.

```
Response:
HTTP/1.1 400 Bad Request
Strict-Transport-Security: max-age=31536000
X-Frame-Options: DENY
X-Content-Type-Options: nosniff
Set-Cookie: JSESSIONID=1233ADC137E591GE144792F38123AB09; Path=/idb/; Secure; HttpOnly
TrackingID: FOS_d0ac0d7b-f4e4-4d83-ba27-d4252e310b88
Cache-Control: no-store
Date: Mon, 06 Jan 2018 10:30:00 GMT
Accept-Ranges: bytes
Server:
Vary: Accept-Charset, Accept-Encoding, Accept-Language, Accept
Access-Control-Allow-Credentials: true
Access-Control-Allow-Headers: Accept, Authorization, Content-Type, TrackingID
Access-Control-Allow-Methods: POST, PUT, PATCH, HEAD, GET, TRACE, CONNECT, OPTIONS, DELETE
Pragma: no-cache
Content-Type: application/json; charset=UTF-8
Connection: close
Content-Length: 176

{"error_description": "The refresh token provided is expired, revoked, malformed, or invalid.", "error": "invalid_request", "trackingID": "FOS_a12b123c-d123-e123-a127-b420be310188"}
```

Apple Push Notification integration is configured in a Cisco Unified IM and Presence deployment and has been working properly. Administrators now report the error "Push notification settings cannot be configured.

400 Bad Request." in the GUI, and HTTP logs are displaying the errors that are shown in the exhibit. Which action solves this issue?

- A. Reboot the IM&P cluster.
- B. Change the HTTP proxy settings to remove errors in request syntax.
- C. Update Refresh Token Manually.
- D. Fix the network connectivity to Apple iCloud.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 23

SAML SSO is enabled in Cisco Unified Communications Manager. What happens when a browser-based client attempts to access a protected resource on a service provider?

- A. The browser follows the redirect and issues an HTTPS GET request to the IdP.
- B. The IdP checks for a valid browser session.
- C. The service provider generates a SAML authentication request.
- D. The SAML request is maintained as a query parameter in the GET request.

Answer: C ([LEAVE A REPLY](#))

Explanation/Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/SAML_SSO_deployment_guide/12_5_1/cucm_b_saml-ss0-deployment-guide-12_5/cucm_b_saml-ss0-deployment-guide-12_5_chapter_01.html

NEW QUESTION: 24

Refer to the exhibit.

---Log snippet---

```
2018-12-27 11:02:05, 430 INFO [0x0000015c]
[rc\dnsutils\win32\win32DnsUtils.cpp(343)] [csf.dns]
[csf::dns::DnsUtils::executeSRVRecordQuery] - About to make DNS SRV record query
'_cisco-uds._tcp.example.com.'
2018-12-27 11:02:05, 430 WARN [0x0000015c]
[src\dnsutils\win32\win32DnsUtils.cpp(52)] [csf.dns]
[csf::dns::mapFromWindowsDNSResult] - *-----* DNS query _cisco-
uds._tcp.example.com. has failed: DNS name does not exist.
(9003).
2018-12-27 11:02:05, 430 INFO [0x0000015c]
[rc\dnsutils\win32\win32DnsUtils.cpp(343)] [csf.dns]
[csf::dns::DnsUtils::executeSRVRecordQuery] - About to make DNS SRV record query
'_cuplogin._tcp.example.com.'
2018-12-27 11:02:05, 435 WARN [0x0000015c]
[src\dnsutils\win32\win32DnsUtils.cpp(52)] [csf.dns]
[csf::dns::mapFromWindowsDNSResult] - *-----* DNS query
_cuplogin._tcp.example.com. has failed: DNS name does not exist.
(9003).
```

Troubleshooting an internal Jabber login issue and you see this logging snippet from the Jabber PRT file. You already checked that the Jabber client has a connection to the correct DNS server. Which DNS record is missing for service discovery of Cisco Unified Communications Manager for the login process to proceed further?

- A. A record `_cisco-uds._tcp.example.com`
- B. SRV record `_cuplogin._tcp.example.com`
- C. A record `_cuplogin._tcp.example.com`
- D. SRV record `_cisco-uds._tcp.example.com`

Answer: B (LEAVE A REPLY)

NEW QUESTION: 25

Which step is the first for web-based single sign-on login?

- A. Authenticate.
- B. Redirect to IdP to get authenticated.
- C. Present authentication assertion.
- D. Request access to protected service.

Answer: (SHOW ANSWER)

Explanation

NEW QUESTION: 26

The external database used for the persistent chat feature has been running out of space, and users are having issues with persistent chat rooms and messages. which external database tool must be used in the cisco IM and presence server to fix this issue?

- A. Cleanup Utility
- B. Merge Utility
- C. High Availability Utility
- D. FreeSpace Utility

Answer: A (LEAVE A REPLY)

NEW QUESTION: 27

An administrator is setting up the Cisco Unified IM and Presence on-premises high availability feature and wants the Server Recovery Manager to initiate failover after 90 seconds. However, failover is happening after 60 seconds. How is this issue corrected?

- A. Change peer Heartbeat Timeout to 90 seconds.
- B. Change Keep Alive (Heartbeat) Interval to 90 seconds.
- C. Change critical service delay to 90 seconds.
- D. Change Keep Alive (Heartbeat) Timeout to 90 seconds.

Answer: D (LEAVE A REPLY)

Reference:

https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/im_presence/configAdminGuide/11_5_1/cup0_b_config-and-admin-guide-1151su5/cup0_b_imp-system-configuration-1151su5_chapter_0100.html

NEW QUESTION: 28

Refer to the exhibit.

```
cm_xmpp_fed: b4291b90| INFO | XMPPServerOutDir: Could not resolve 'jabber.example.com' using SRV _jabber._tcp. Failing the outbound connection.
```

An administrator is troubleshooting an issue with XMPP Federation between two. eight-node IM and Presence clusters. After looking at the logs, the administrator finds this message and must publish one or more DNS SRV records containing one or more addresses of the IM and Presence node(s). How many nodes must be selected to publish?

- A. 20
- B. 5
- C. 10
- D. 1

Answer: D (LEAVE A REPLY)

NEW QUESTION: 29

Refer to the exhibit.

Monitored Node	Assigned Users	Active Users	Node State	Node Reason
10.49.53.52	1		Running in Backup Mode	Critical Service Down
10.49.53.58	2		Failed Over with Critical Services not Running	Critical Service Down

An organization is moving from on-premise Exchange to Microsoft Office 365 for email and calendaring. The administrator would like to maintain meeting presence functionality in Jabber clients connected to Cisco IM and Presence after this move. Office 365 certificates must be installed to accomplish this. Which two trust stores should these certificates be uploaded to on Cisco IM and Presence? (Choose two.)

- A. cup-xmpp- trust
- B. xmpp-fed-trust
- C. xmpp-trust
- D. cup-trust
- E. tomcat-trust

Answer: (SHOW ANSWER)

NEW QUESTION: 30

Refer to the exhibit.

```
[csf.cert.] [csf::cert::BaseCertVerifier:doVerifyCertificate] - About to verify the certificate.
[csf.cert.win32] [csf::cert::Win32CertVerifier:loadCertificateChain] - Certificate Chain status 0x20
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifySslPolicy] - Ignoring error due to Invalid CN
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifyPolicies] - SSL Policy status 0x2140204809
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifyPolicies] - Basic Constraints Policy status 0x0
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifyCertificate] - Certificate validation response is 'invalid'
[csf.cert.] [csf::cert::BaseCertVerifier:doVerifyCertificate] - Result of platform cert verification: UNTRUSTED_ROOT
[csf.cert.] [csf::cert::BaseCertVerifier:checkIdentity] - About to check for an Identity Match.
[csf.cert.xmpp] [csf::cert::XmppCertVerifier:checkIdentifier] - Verifying XMPP Identity 'example.com'
[csf.cert.utils] [csf::cert::AltNameParserImpl:verifyXmpp] - Xmpp match was not found for: 'example.com'
[csf.cert.utils] [csf::cert::AltNameParserImpl:verify] - Match for 'example.com' found in dnsNames index: 1
[csf.cert.] [csf::cert::BaseCertVerifier:checkIdentifiers] - Verification of identity succeeded. Matched identifier : 'example.com'
[csf.diagnostics] [CSFDiagnostics::DiagnosticsImpl:AddRecord] - Add record task enqueued: example.com
[csf.common.PolicySet] [csf::common:PolicySet:getPolicy] - Successfully found Policy with nature IGNORE_INVALID_CERT_CONDITION
[IGNORE_REVOCATION_INFO_UNAVAILABLE_ERRORS]
[csf.cert.] [csf::cert::BaseCertVerifier:applyIgnoreInvalidCertConditionPolicy] - About to enforce ignore invalid cert condition policy.
[csf.cert] [csf::cert::IgnoreInvalidCertConditionPolicy:removeIgnoredStatuses] - No statuses have been removed from the verification status.
[csf.cert] [csf::cert::IgnoreInvalidCertConditionPolicy:enforce] - Policy enforced
[csf.cert.] [csf::cert::BaseCertVerifier:verifyCertificateAsync] - Certificate initially verified, result: FAILURE
[csf.cert] [csf::cert::CertificateDataImpl:parseSubjectCNField] - size of Subject CN field : 16
[csf.cert] [csf::cert::CertificateDataImpl:parseSubjectCNField] - Subject CN field : impa.example.com
[csf.common.PolicySet] [csf::common:PolicySet:getPolicy] - Successfully found Policy with nature INVALID_CERT_MANAGEMENT [PROMPT_USER]
```

Users report that they are prompted to accept server certificates when they initially run Cisco Jabber. An engineer removes these prompts to prevent confusion. Which statement about this scenario is true?

- A. The behavior is a security breach because certificates are considered untrusted and as not coming from Cisco Collaboration servers.
- B. Presentation of the certificates can be disabled by setting up Cisco IM&P servers into nonsecure mode.
- C. Nothing can be done to resolve this issue because certificates must be accepted by each Jabber user, per Cisco policy.
- D. These certificates are self-signed certificates, so they must be added manually to the user OS certificate stores.

Answer: (SHOW ANSWER)

NEW QUESTION: 31

An engineer is checking the Cisco Unified Communications Manager and Cisco Unity Connection integration and presses the Message button on a phone to check the voicemail. Which action does Cisco Unified CM take?

- A. Cisco Unified CM looks up the voicemail pilot configured to dial.
- B. Cisco Unified CM routes the configured hunt pilot to Unity Connection.
- C. Cisco Unified CM looks up the hunt pilot configured to dial.
- D. Cisco Unified CM sends an AXL query to Unity Connection.

Answer: A (LEAVE A REPLY)

Explanation/Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/admin/9_1_1/ccmsys/CUCM_BK_C5565591_00_cucm-system-guide-91/CUCM_BK_C5565591_00_cucm-system-guide-

Valid 300-810 Dumps shared by PrepPdf.com for Helping Passing 300-810 Exam! PrepPdf.com now offer the **newest 300-810 exam dumps**, the PrepPdf.com 300-810 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com 300-810 dumps with Test Engine here: <https://www.preppdf.com/Cisco/300-810-prepaway-exam-dumps.html> (314 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 32

Which description of an IdP server is true?

- A. authenticates user credentials
- B. consists of pieces of security information that are transferred to the service provider for user authentication
- C. is an authentication request that is generated by a Cisco Unified Communications application
- D. provides user authorization

Answer: B (LEAVE A REPLY)

NEW QUESTION: 33

Which two steps are needed to configure high availability in Cisco IM and presence? (choose two.)

- A. Configure the CUP AXL user.
- B. Configure CUP administrator
- C. Enable the Failover Check box
- D. Assign the subscriber to the redundancy group
- E. Select the enable high availability checkbox and save the configuration change

Answer: (SHOW ANSWER)

NEW QUESTION: 34

Refer to the exhibit.

```
[csf.cert.] [csf::cert::BaseCertVerifier:doVerifyCertificate] - About to verify the certificate.
[csf.cert.win32] [csf::cert::Win32CertVerifier:loadCertificateChain] - Certificate Chain status 0x20
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifySslPolicy] - Ignoring errors due to Invalid CN
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifyPolicies] - SSL Policy status 0x2148204809
[csf.cert.win32] [csf::cert::win32CertVerifier:verifyPolicies] - Basic Constraints Policy status 0x0
[csf.cert.win32] [csf::cert::win32CertVerifier:verifyCertificate] - Certificate validation response is 'invalid'
[csf.cert.] [csf::cert::BaseCertVerifier:doVerifyCertificate] - Result of platform cert verification: [UNTRUSTED_ROOT]
[csf.cert.] [csf::cert::BaseCertVerifier:checkIdentity] - About to check for an Identity Match.
[csf.cert.xmpp] [csf::cert::XmppCertVerifier:checkIdentifier] - Verifying XMPP Identity 'example.com'
[csf.cert.utils] [csf::cert::AltNameParserImpl:verifyXmpp] - Xmpp match was not found for: 'example.com'
[csf.cert.utils] [csf::cert::AltNameParserImpl:verify] - Match for 'example.com' found in dnsNames index: 1
[csf.cert.] [csf::cert::BaseCertVerifier:checkIdentifiers] - Verification of identity succeeded. Matched identifier: 'example.com'
[csf.diagnostics] [CSFDiagnostics::DiagnosticsImpl::AddRecord] - Add record task enqueued: example.com
[csf.common.PolicySet] [csf::common:PolicySet:getPolicy] - Successfully found Policy with nature IGNORE_INVALID_CERT_CONDITION
[csf.common.PolicySet] [csf::common:PolicySet:getPolicy] - Successfully found Policy with nature IGNORE_REVOCATION_INFO_UNAVAILABLE_ERRORS
[csf.cert.] [csf::cert::BaseCertVerifier:applyIgnoreInvalidCertConditionPolicy] - About to enforce ignore invalid cert condition policy.
[csf.cert] [csf::cert::IgnoreInvalidCertConditionPolicy:removeIgnoredStatuses] - No statuses have been removed from the verification status.
[csf.cert] [csf::cert::IgnoreInvalidCertConditionPolicy:enforce] - Policy enforced
[csf.cert.] [csf::cert::BaseCertVerifier:verifyCertificateAsync] - Certificate initially verified, result: FAILURE
[csf.cert] [csf::cert::CertificateDataImpl::parseSubjectCNField] - size of Subject CN field: 16
[csf.cert] [csf::cert::CertificateDataImpl::parseSubjectCNField] - Subject CN field: impa.example.com
[csf.common.PolicySet] [csf::common:PolicySet:getPolicy] - Successfully found Policy with nature INVALID_CERT_MANAGEMENT [PROMPT_USER]
```

Users report that they are prompted to accept server certificates when they initially run Cisco Jabber. An engineer removes these prompts to prevent confusion. Which statement about this scenario is true?


- A. Presentation of the certificates can be disabled by setting up Cisco IM and Presence servers into nonsecure mode.
- B. Nothing can be done to resolve this issue because certificates must be accepted by each Jabber user, per Cisco policy.
- C. These certificates are self-signed certificates, so they must be added manually to the user OS certificate stores.
- D. The behavior is a security breach because certificates are considered untrusted and as not coming from Cisco Collaboration servers.

Answer: C (LEAVE A REPLY)

Explanation/Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/jabber-windows/116637-trouble-jabber-00.html>

NEW QUESTION: 35

Refer to the exhibit.

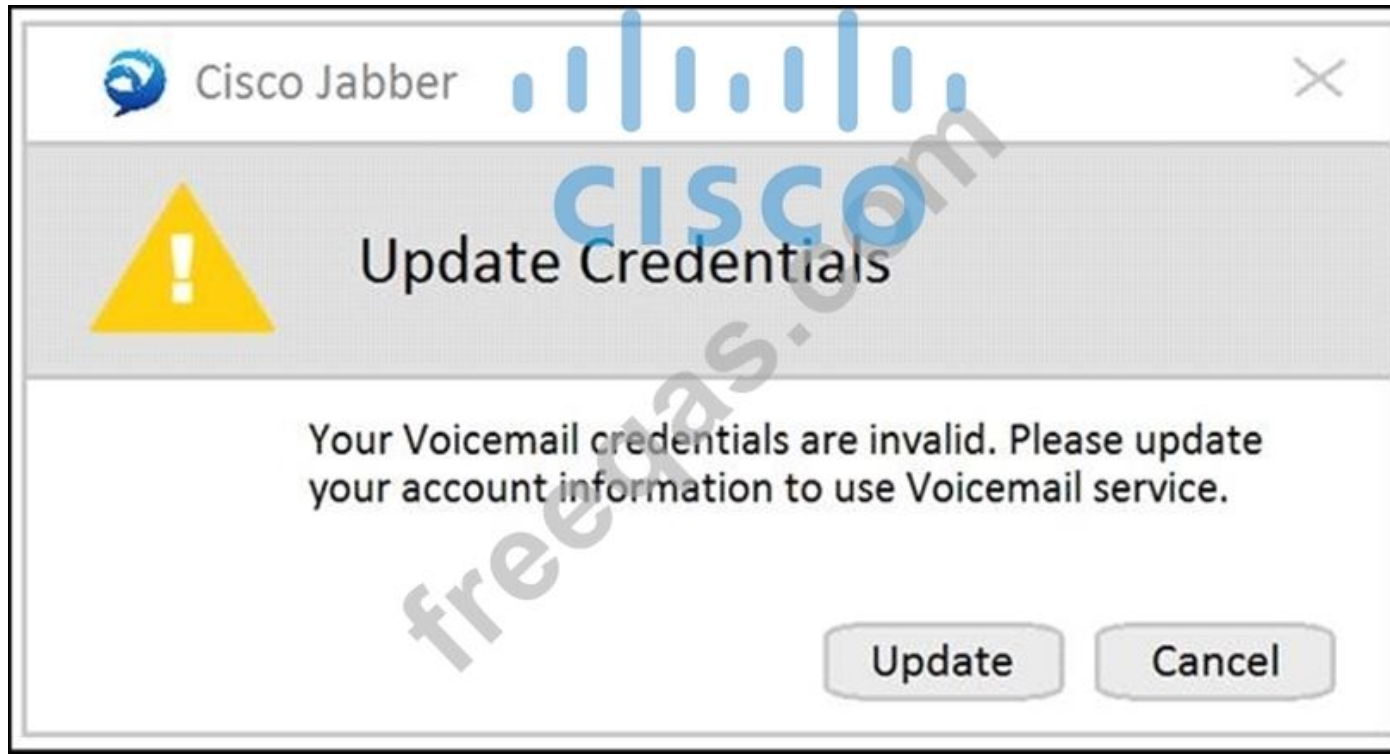

Which action allows a remote Cisco Jabber user utilizing Mobile and Remote Access to automatically log in to a Cisco Unity Connection voicemail box via OAuth?

- A. Add CUCM under System Settings > Authz Servers in Cisco Unity.
- B. Add CUCM under System Settings > Authz Servers in Cisco Expressway-C.
- C. Add CUCM under System Settings > Authz Servers in Cisco Expressway-E.
- D. Add CUCM under System Settings > Authz Servers in Cisco Unity Connection.

Answer: (SHOW ANSWER)

NEW QUESTION: 36

Which SAML component specifies the mapping of SAML assertion protocol message exchanges with standard messaging formats or communication protocols such as SOAP exchanges?

- A. SAML binding
- B. SAML assertion
- C. SAML profiles
- D. SAML protocol


Answer: A (LEAVE A REPLY)

Reference:

https://en.wikipedia.org/wiki/Security_Assertion_Markup_Language

NEW QUESTION: 37

Refer to the exhibit.

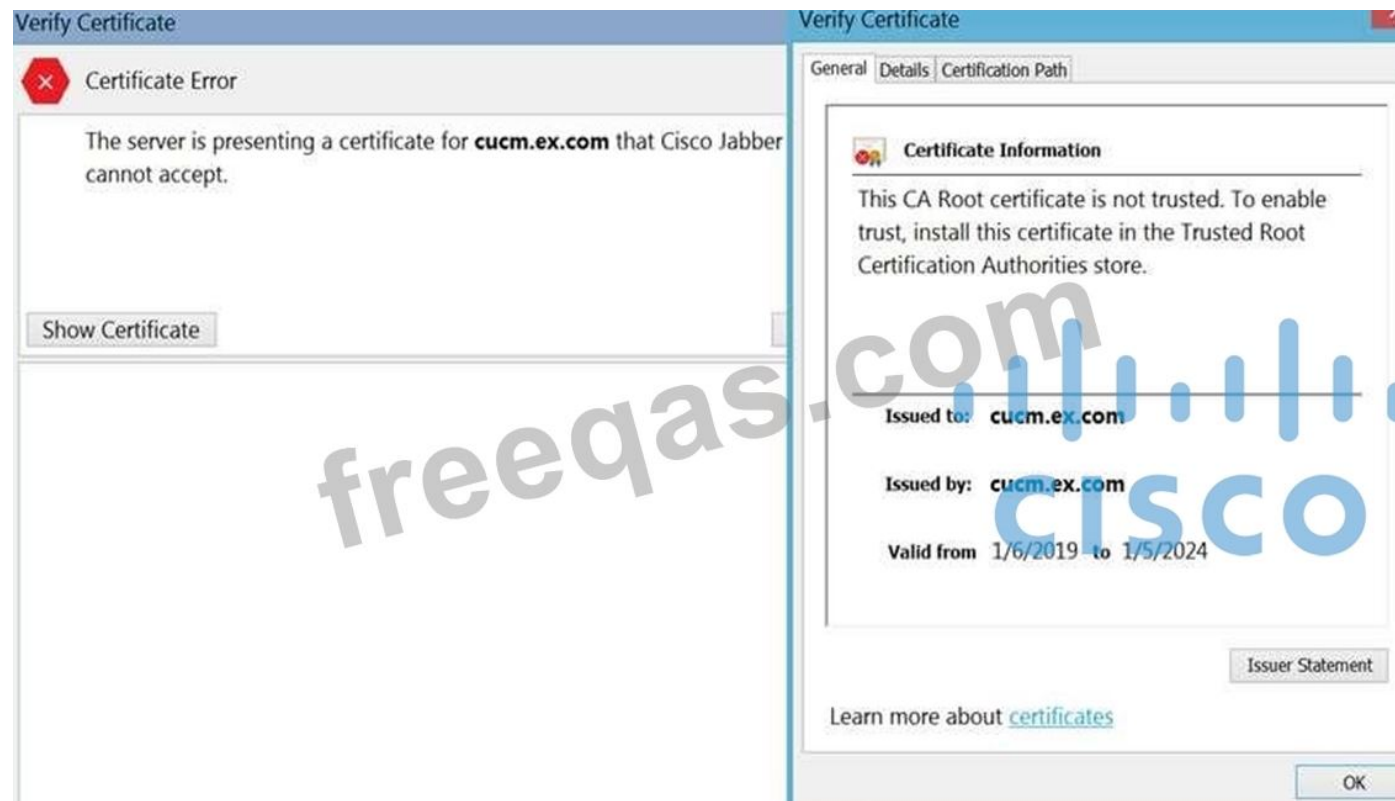

When troubleshooting an internal Jabber login problem, there is a pop-up about a certificate error, and then the login fails. The FQDN of Cisco UCM is cucm.ex.com, and the FQDN of the IM and Presence Server is imp.ex.com. Which two actions should be taken to fix this issue? (Choose two.)

- A. Sign the Cisco Unified IM and Presence server cup certificate with a trusted certificate authority.
- B. Import the certificate of cucm.ex.com into the Trusted Certificate Authorities on the PC running Jabber.
- C. Import the Cisco UCM CallManager certificate into the Trusted Certificate Authorities on the PC running Jabber.
- D. Sign the Cisco UCM tomcat certificate with a trusted certificate authority.
- E. Sign the Cisco UCM CallManager certificate with a trusted certificate authority.

Answer: C,D (LEAVE A REPLY)

NEW QUESTION: 38

An end user opened a ticket, stating that before logging in to Jabber for Windows, a warning is displayed that a server certificate has expired. Which two certificates must be verified on the Cisco Unified Communications Manager and IM&P deployment? (Choose two.)

- A. callmanager on Cisco Unified CM
- B. cup on IM&P
- C. cup-xmpp on IM&P
- D. capf on Cisco Unified CM
- E. tomcat on Cisco Unified CM

Answer: (SHOW ANSWER)

NEW QUESTION: 39

An engineer is configuring a Cisco Voicemail Organization. How many links will be configured between two Cisco Unity Connection clusters?

- A. three
- B. two
- C. four
- D. one

Answer: D (LEAVE A REPLY)

NEW QUESTION: 40

DRAG DROP

Drag and drop the events for an on-premises Jabber SAML SSO flow from the left into the correct order on the right.

Select and Place:

Service Provider Authorization request	Step 1
SSO Mode Discovery	Step 2
IDP Authentication	Step 3
Service Provider Authentication	Step 4

Answer:

Service Provider Authorization request	SSO Mode Discovery
SSO Mode Discovery	IDP Authentication
IDP Authentication	Service Provider Authentication
Service Provider Authentication	Service Provider Authorization request

NEW QUESTION: 41

Digital networking is configured between two Cisco Unity Connection clusters using an HTTPS connection. Which two objects are replicated between these two clusters? (Choose two.)

- A. partitions and search spaces
- B. user greetings
- C. user templates and user greetings
- D. call handlers
- E. users and their corresponding mailboxes

Answer: (SHOW ANSWER)

Reference:

https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/connection/10x/https_networking/guide/10xcuchttpsnetx/10xcuchttpsnet010.html

NEW QUESTION: 42

When Cisco IM and Presence is configured to use automatic fallback, how long does the Server Recovery Manager service wait for a failed service/server to remain active before an automatic fallback is initiated?

- A. 20 minutes
- B. 10 minutes
- C. 30 minutes
- D. 1 hour


Answer: C (LEAVE A REPLY)

NEW QUESTION: 43

Drag and drop the events for an on-premises Jabber SAML SSO flow from the left into the correct order on the right.



Answer:

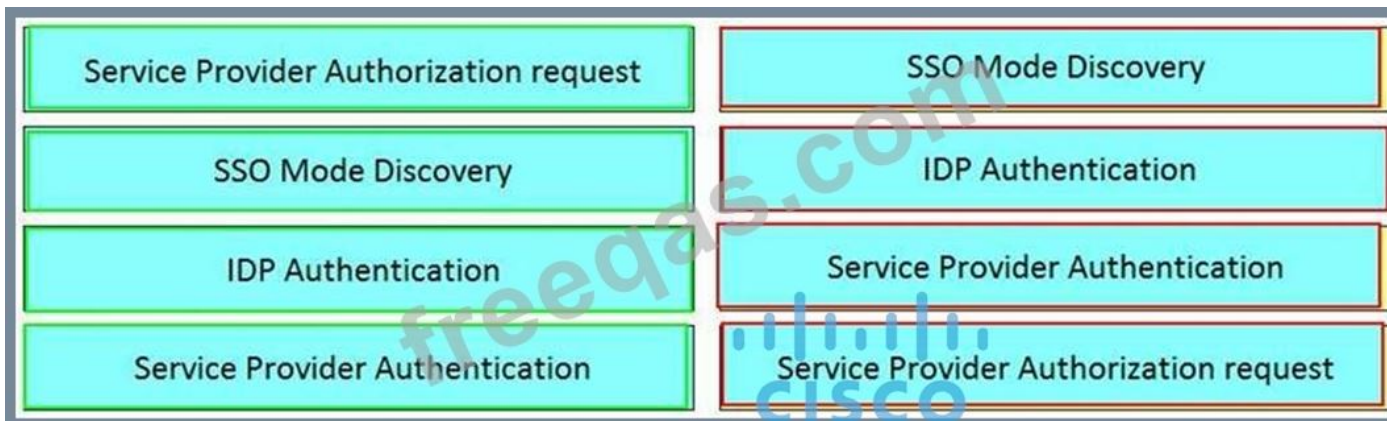

NEW QUESTION: 44

Refer to the exhibit.

High Availability			
<input checked="" type="checkbox"/> Enable High Availability			
Monitored Server	Assigned Users	Active Users	Server State
IMPPub.CiscoLiveUS.net	4	0	Failed Over
IMPSub.CiscoLiveUS.net	0	0	Running in Backup Mode

A customer reports that after a network failure, all of the Cisco Jabber clients are not switched back to their home nodes. An engineer determines that the primary Cisco IM and Presence server is in Failed Over state.

Which two actions should be performed to bring the system back to operational state and to prevent future occurrences? (Choose two.)

- A. Click the Fallback button in the Server Action pane.
- B. Advise all users to re-login to their Jabber clients.
- C. Confirm that both IM and Presence servers are configured in the Presence Redundancy Group configuration pane.
- D. Perform a restart of the IM and Presence primary server to force fallback.
- E. Set the Automatic Failover parameter in the Server Recovery Manager Service Parameters to the value True.

Answer: A,C (LEAVE A REPLY)

NEW QUESTION: 45

Refer to the exhibit.

```

---Log snippet---

2018-12-27 11:02:05, 430 INFO [0x0000015c]
[re\dnsutils\win32\win32DnsUtils.cpp(343)] [csf.dns]
[csf::dns::DnsUtils::executeSRVRecordQuery] - About to make DNS SRV record query
'_cisco-uds._tcp.example.com.'
2018-12-27 11:02:05, 430 WARN [0x0000015c]
[src\dnsutils\win32\win32DnsUtils.cpp(52)] [csf.dns]
[csf::dns::mapFromWindowsDNSResult] - *-----* DNS query _cisco-
uds._tcp.example.com. has failed: DNS name does not exist.
(9003).
2018-12-27 11:02:05, 430 INFO [0x0000015c]
[rc\dnsutils\win32\win32DnsUtils.cpp(343)] [csf.dns]
[csf::dns::DnsUtils::executeSRVRecordQuery] - About to make DNS SRV record query
'_cuplogin._tcp.example.com.'
2018-12-27 11:02:05, 435 WARN [0x0000015c]
[src\dnsutils\win32\win32DnsUtils.cpp(52)] [csf.dns]
[csf::dns::mapFromWindowsDNSResult] - *-----* DNS query
_cuplogin._tcp.example.com. has failed: DNS name does not exist.
(9003).

```

Troubleshooting an internal Jabber login issue and you see this logging snippet from the Jabber PRT file. You already checked that the Jabber client has a connection to the correct DNS server. Which DNS record is missing for service discovery of Cisco Unified Communications Manager for the login process to proceed further?

- A. SRV record _cisco-uds._tcp.example.com
- B. A record for the Cisco Unified Communications Manager
- C. A record _cuplogin._tcp.example.com
- D. SRV record _cuplogin._tcp.example.com

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 46

Digital networking is configured between two Cisco Unity Connection clusters using an HTTPS connection.

Which two objects are replicated between these two clusters? (Choose two.)

- A. partitions and search spaces
- B. user greetings
- C. user templates and user greetings
- D. call handlers
- E. users and their corresponding mailboxes

Answer: A,E ([LEAVE A REPLY](#))

Explanation/Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/connection/10x/https_networking/guide/10xcuchttpsnetx/10xcuchttpsnet010.html

Valid 300-810 Dumps shared by PrepPdf.com for Helping Passing 300-810 Exam! PrepPdf.com now offer the **newest 300-810 exam dumps**, the PrepPdf.com 300-810 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com 300-810 dumps with Test Engine here: <https://www.preppdf.com/Cisco/300-810-prepaway-exam-dumps.html> (314 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 47

Refer to the exhibit.

```
Users with Duplicate User IDs
-----
User ID : user3
Node Name
cucm-imp-1
cucm-imp-2
```

Which two steps resolve the "Users with Duplicate User IDs" message? (Choose two.)

- A. Assign the duplicate user to the secondary Cisco IM and Presence node.
- B. Delete the user ID for the duplicate user ID.
- C. Unassign a user from one of the clusters when the same user is assigned to two different clusters.
- D. Rename the directory URI value for one of the users to ensure that there is no duplication.
- E. Rename the User ID value for one user if different users on different clusters have the same User ID assigned.

Answer: C,E ([LEAVE A REPLY](#))

NEW QUESTION: 48

Which two protocols does the Cisco IM Presence service use to federate with external domains? (Choose two.)

- A. XMPP
- B. SNMP

- C. SIP
- D. SCCP
- E. SMPP

Answer: A,C (LEAVE A REPLY)

Explanation/Reference: https://www.cisco.com/c/dam/en/us/td/docs/voice_ip_comm/cucm/im_presence/interdomain_federation/11_5_1/cup0_b_interdomain-federation-guide-imp-115.pdf

NEW QUESTION: 49

What are two authentication mechanisms for identity provider authentication? (Choose two.)

- A. Kerberos
- B. UID
- C. PKI/CAC
- D. Password only
- E. ACS

Answer: A,C (LEAVE A REPLY)

NEW QUESTION: 50

Refer to the exhibit.

Discovery

Discovery Outcome	Failure: FAILED_UCM90_CONNECTION
Domain Controller	The specified domain either does not exist or could not be contacted.
Edge Domain	ccnp.cisco.com
Edge Required	No
Edge Visibility	Not Visible
Excluded Services	None
FTPS	OFF
Internal Visibility	Visible
Services Domain	ccnp.cisco.com
Services Domain Source	Email Address from UserInput
Voice Services Domain	ccnp.cisco.com

WebEx

CAS lookup	FAILURE: HTTP_CONNECTION_FAILED
CAS lookup url	https://logiop.webexconnect.com/cas/FederatedSSO?org=corp.cisco.com

DNS Records

_cisco-uds._tcp.ccnp.cisco.com.	cucm1.ccnp.cisco.com
_collab-edge._tls.ccnp.cisco.com	Domain does not exist

_cisco-uds Properties [?] [X]

Service Location (SRV) Security

Domain:

Service:


Protocol:

Priority:

Weight:

Port number:

Host offering this service:



Users connected to the internal network report a "Cannot communicate with the server" error while trying to log in to Cisco Jabber using auto service discovery. The Jabber diagnostics and the SRV record configuration are as shown in the exhibit. The host cucm1.ccnp.cisco.com is correctly resolved by the user desktops with the Cisco Unified Communications Manager IP address. Why is the user not able to log in?

- A. SRV protocol is not set up correctly. It should be _tls instead of _tcp.
- B. Marking weight as 0 on the SRV record makes it inactive, so Jabber cannot discover the Cisco Unified CM.
- C. The port specified on the SRV record is wrong.
- D. The domain ccnp.cisco.com does not exist on the DNS server.

Answer: C (LEAVE A REPLY)

Reference:

https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/jabber/Windows/9_7/CJAB_BK_C606D8A9_00_cisco-jabber-dns-configuration-guide/CJAB_BK_C606D8A9_00_cisco-jabber-dns-configuration-guide_chapter_010.html

NEW QUESTION: 51

An engineer is configuring Cisco Unity Connection to provide messaging services and needs to designate a set of phone numbers to be used for transferring calls within the organization to prevent toll fraud. Which mechanism in Cisco Unity Connection should be modified to accomplish this goal?

- A. transfer rules
- B. fraud tables
- C. restriction tables
- D. calling search spaces

Answer: C (LEAVE A REPLY)

NEW QUESTION: 52

What are two Cisco Jabber 12.6 on-premises deployment types that can be run on a Windows-enabled PC?

(Choose two.)


- A. Contact Center Agent
- B. IM-only
- C. multicloud-based
- D. Full UC
- E. cloud-based

Answer: (SHOW ANSWER)

Explanation/Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/jabber/12_6/cjab_b_on-prem-deployment-cisco-jabber_12-6.pdf

NEW QUESTION: 53

Refer to the exhibit.

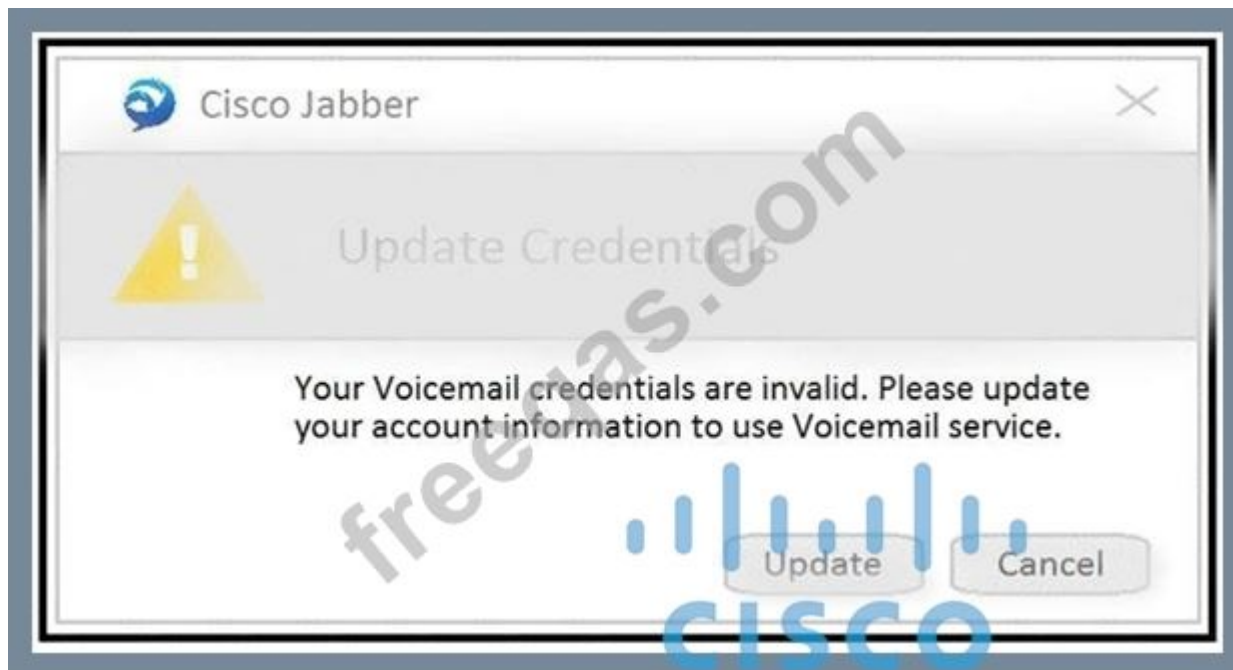


Which action allows a remote Cisco Jabber user utilizing Mobile and Remote Access to automatically log in to a Cisco Unity Connection voicemail box via OAuth?

- A. Add CUCM under System Settings > Authz Servers in Cisco Unity.
- B. Add CUCM under System Settings > Authz Servers in Cisco Unity Connection.
- C. Add CUCM under System Settings > Authz Servers in Cisco Expressway-C.
- D. Add CUCM under System Settings > Authz Servers in Cisco Expressway-E.

Answer: B (LEAVE A REPLY)

NEW QUESTION: 54

Refer to the exhibit.

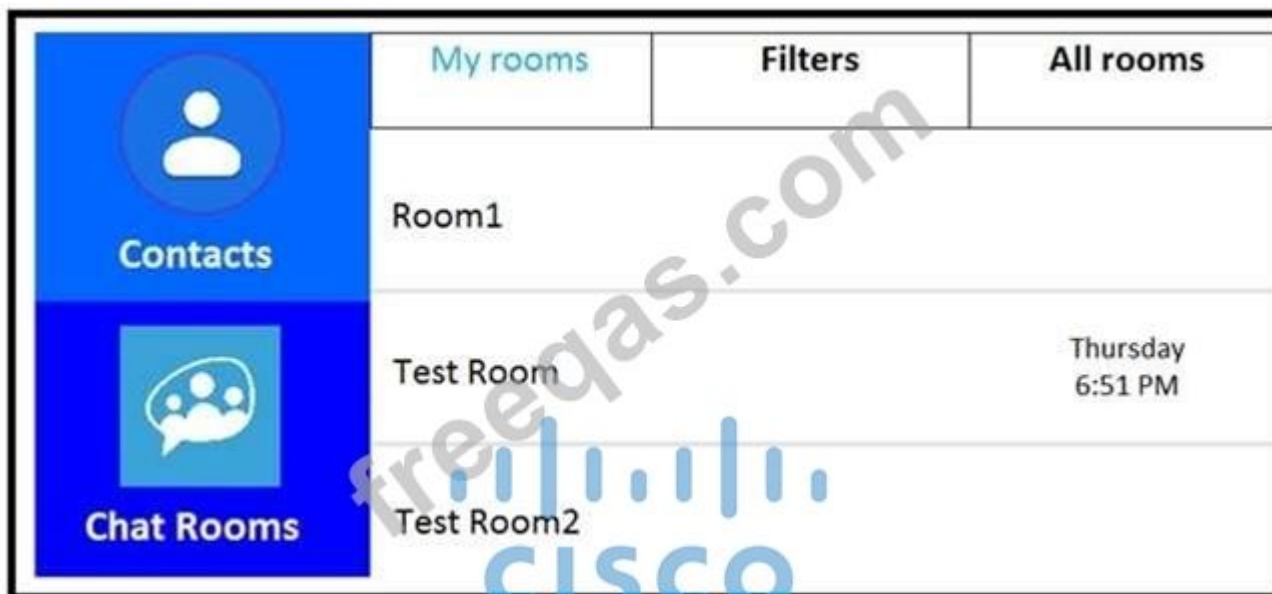

Users report that they cannot see the Chat Rooms icon on their Cisco Jabber clients. This feature works without issue in the lab. An engineer reviews the Cisco IM&P and Jabber configuration and finds that the jabber-config.xml file is configured properly to support this feature. Which activity should be performed on the IM&P server to resolve this issue?

- A. Activate Cisco XCP Connection Manager in Cisco Unified Serviceability > Tools > Service Activation.

- B. Restart Cisco XCP Message Archiver in Cisco Unified Serviceability > Tools > Control Center - Feature Services.
- C. Restart XCP Text Conference Manager in Cisco Unified Serviceability > Tools > Control Center - Network Services.
- D. Activate XCP Text Conference Manager in Cisco Unified Serviceability > Tools > Service Activation.

Answer: D (LEAVE A REPLY)

Explanation/Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/jabber-windows/118684-probsol-chat-00.html>

NEW QUESTION: 55

An engineer is importing users into Cisco Unity Connection using AXL and discovers that some users are not listed in the import view. Which action should be taken to resolve this issue?

- A. Configure the user primary extension to their directory number.
- B. Configure the user digest credentials to match the user password.
- C. Configure the username and password in LDAP.
- D. Configure the user access control group assignment to Standard CTI Enabled.

Answer: A (LEAVE A REPLY)

NEW QUESTION: 56

Refer to the exhibit.

Monitored Server	Assigned Users	Active Users	Server State
IMPPub.CiscoLiveUS.net	4	0	Failed Over
IMPSub.CiscoLiveUS.net	0	0	Running in Backup Mode

A customer reports that after a network failure, all of the Cisco Jabber clients are not switched back to their home nodes. An engineer determines that the primary Cisco IM&P server is in Failed Over state. Which two actions should be performed to bring the system back to operational state and to prevent future occurrences?


(Choose two.)

- A. Perform a restart of the IM&P primary server to force fallback.
- B. Set the Automatic Failover parameter in the Server Recovery Manager Service Parameters to the value True.
- C. Click the Fallback button in the Server Action pane.
- D. Confirm that both IM&P servers are configured in the Presence Redundancy Group configuration pane.
- E. Advise all users to re-login to their Jabber clients.

Answer: C,D (LEAVE A REPLY)

NEW QUESTION: 57

Refer to the exhibit.

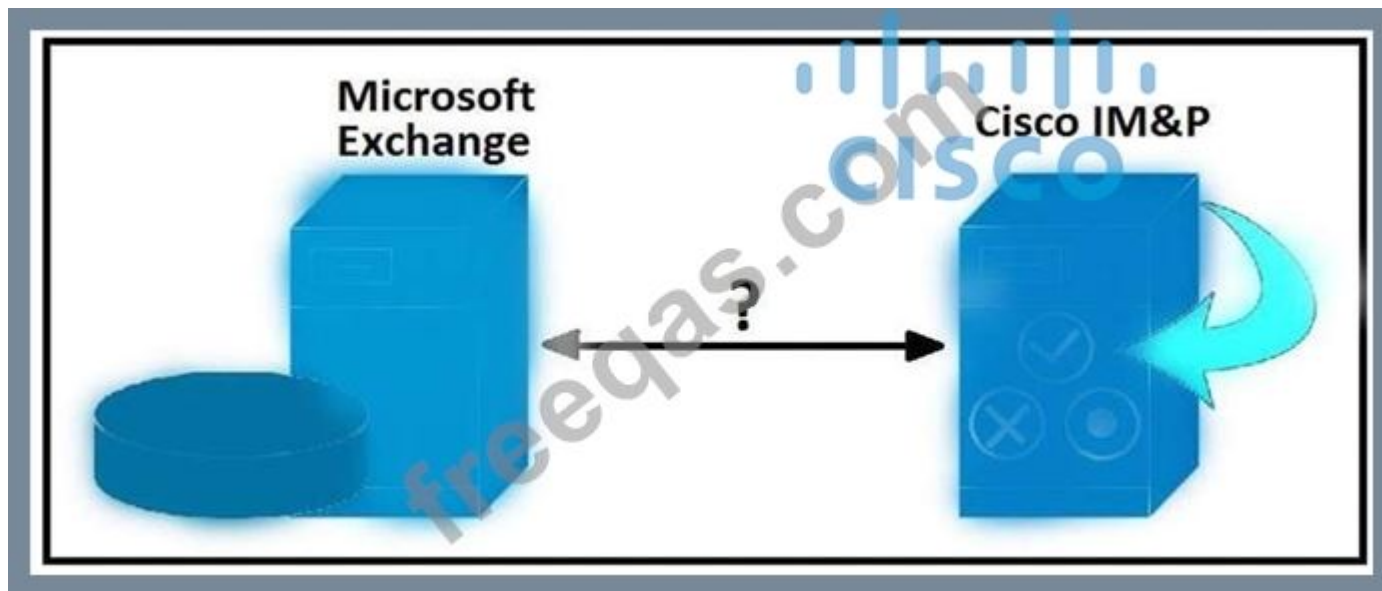

Which protocol is used for communication between Cisco IM and Presence and Microsoft Exchange Server?

- A. POP3
- B. XMPP
- C. EWS
- D. IMAP

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 58

Which SSO authentication method requires no action from the user when the session token times out?

- A. local authentication
- B. smart card
- C. web form
- D. external database

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 59

What is the primary mechanism in Cisco Unity Connection that is used for toll fraud prevention?

- A. restriction tables
- B. fraud tables
- C. transfer rules
- D. calling search spaces

Answer: A ([LEAVE A REPLY](#))

Explanation/Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/connection/10x/security/guide/10xcucsecx/10xcucsec020.pdf

NEW QUESTION: 60

What is the primary mechanism in Cisco Unity Connection that is used for toll fraud prevention?

- A. restriction tables
- B. fraud tables

- C. transfer rules
- D. calling search spaces

Answer: A (LEAVE A REPLY)

Reference:

https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/connection/10x/security/guide/10xcucsecx/10xcucsec020.pdf

NEW QUESTION: 61

Refer to the exhibit.

```
2014-11-07 09:39:53, 855 ERROR [0X00000298] [ice\TelephonyAdapterPhoneDevice.cpp(178)] [TelephonyAdppter]
[TelephonyAdapter::selectDeviceImpl] - switchMode to device [SEP84802D7698D6] failed with error
[eDeviceRegCouldNotOpenDevice]
```

Which end-user option can resolve this issue?

- A. Standard CTI Allow Calling Number Modification
- B. Standard CTI Allow Call Monitoring
- C. Standard CTI Allow Control of Phones Supporting Rollover Mode
- D. Standard CTI Reception of SRTP Key Material

Answer: C (LEAVE A REPLY)

Valid 300-810 Dumps shared by PrepPdf.com for Helping Passing 300-810 Exam! PrepPdf.com now offer the **newest 300-810 exam dumps**, the PrepPdf.com 300-810 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com 300-810 dumps with Test Engine here: <https://www.preppdf.com/Cisco/300-810-prepaway-exam-dumps.html> (314 Q&As Dumps, **40%OFF Special Discount: Exam-Tests**)

NEW QUESTION: 62

Secure XMPP communication is required for XMPP federation with external domains and the Cisco IM and Presence. Which certificate is used for XMPP interdomain federation when connecting to an externally federated domain?

- A. cup-xmpp-s2s
- B. Tomcat
- C. cup-xmpp
- D. cup

Answer: (SHOW ANSWER)

NEW QUESTION: 63

Digital networking is configured between two Cisco Unity Connection clusters using an HTTPS connection.

Which two objects are replicated between these two clusters? (Choose two.)

- A. user templates and user greetings
- B. users and their corresponding mailboxes
- C. user greetings
- D. partitions and search spaces

E. call handlers

Answer: B,D (LEAVE A REPLY)

NEW QUESTION: 64

Refer to the exhibit.

```
<iq from='example.com' type='error' id='sess_1'>
  <session xmlns='urn:ietf:params:xml:ns:xmpp-session'/>
  <error type='wait'>
    <internal-server-error
      xmlns='urn:ietf:params:xml:ns:xmpp-stanzas'/>
  </error>
</iq>
```

User A tries to log in to the Cisco Jabber client, the login works fine, but the user cannot see their self-presence or other users' presence in their contact list. The administrator checks the Cisco IM and Presence Server logs and sees an issue. What is the issue, and how does it get resolved?

- A. The user is duplicated in another Cisco IM and Presence cluster; unassign the user from the duplicate IM and Presence cluster.
- B. Presence has stopped working for the user; unassign and reassign the end-user to Cisco IM and Presence.
- C. The user credentials are incorrect; ask the user to change the credentials.
- D. The Cisco IM and Presence Server has CPU/memory issues; restart the IM and Presence Server.

Answer: D (LEAVE A REPLY)

NEW QUESTION: 65

An engineer is configuring a remote Cisco IM and Presence Service and needs to ensure that users can communicate across clusters in the same domain and receive presence status. Which protocol should be used to accomplish this task?

- A. LDAP
- B. DNS
- C. XMPP
- D. AXL/SOAP

Answer: C (LEAVE A REPLY)

NEW QUESTION: 66

Refer to the exhibit.

```
2014-11-07 09:39:53, 855 ERROR [0X00000298] [ice\TelephonyAdapterPhoneDevice.cpp(178)] [TelephonyAdppter]
[TelephonyAdapter::selectDeviceImpl] - switchMode to device [SEP84802D7698D6] failed with error
[eDeviceRegCouldNotOpenDevice]
```

Which end-user option can resolve this issue?

- A. Standard CTI Allow Calling Number Modification
- B. Standard CTI Reception of SRTP Key Material

- C. Standard CTI Allow Control of Phones Supporting Rollover Mode
- D. Standard CTI Allow Call Monitoring

Answer: [\(SHOW ANSWER\)](#)

NEW QUESTION: 67

Refer to the exhibit.

```
2014-11-07 09:39:53, 855 ERROR [0X00000298] [ice\TelephonyAdapterPhoneDevice.cpp(178)] [TelephonyAdapter]
[TelephonyAdapter::selectDeviceImpl] – switchMode to device [SEP84802D7698D6] failed with error
[eDeviceRegCouldNotOpenDevice]
```

Which end-user option can resolve this issue?

- A. Standard CTI Allow Calling Number Modification
- B. Standard CTI Allow Control of Phones Supporting Rollover Mode
- C. Standard CTI Allow Call Monitoring
- D. Standard CTI Allow Reception of SRTP Key Material

Answer: D [\(LEAVE A REPLY\)](#)

NEW QUESTION: 68

Refer to the exhibit. An engineer assists a user who reports that the voicemail notifications show correctly on the desk phone are not available in the jabber client. Which action resolves this issue?

- A. Ensure that the voicemail server is listed in the user's CTI profile
- B. Configure the voicemail profile on the user's service profile
- C. Reset the Jabber client and have the user sign in again
- D. Set the voicemail profile on the user's line on the CSF device.

Answer: B [\(LEAVE A REPLY\)](#)

NEW QUESTION: 69

Which service must be activated on Cisco Unity Connection to utilize LDAP synchronization?

- A. Cisco Tomcat
- B. Cisco DirSync
- C. Cisco Sync Agent
- D. Cisco RIS Data Collector

Answer: B [\(LEAVE A REPLY\)](#)

NEW QUESTION: 70

What is a step in the SAML SSO process?

- A. The IdP redirects the SAML response to the browser.
- B. The LDAP server extracts the assertion.
- C. The service provider issues an authentication challenge to the browser.
- D. The browser issues an HTTPS POST request to the IdP.

Answer: A [\(LEAVE A REPLY\)](#)

Reference:

https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/SAML_SSO_deployment_guide/12_5_1/cucm_b_saml-ss0-deployment-guide-12_5/cucm_b_saml-ss0-deployment-guide-12_5_chapter_01.html

NEW QUESTION: 71

An organization is moving from on-premise Exchange to Microsoft Office 365 for email and calendaring. The administrator would like to maintain meeting presence functionality in Jabber clients connected to Cisco IM and Presence after this move. Office 365 certificates must be installed to accomplish this. Which two trust stores should these certificates be uploaded to on Cisco IM and Presence? (Choose two.)

- A. cup-xmpp-trust
- B. xmpp-fed-trust
- C. xmpp-trust
- D. tomcat-trust
- E. cup-trust

Answer: A,E (LEAVE A REPLY)

Explanation/Reference:

https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/im_presence/configAdminGuide/11_5_1/cup0_b_config-and-admin-guide-1151su5/cup0_b_imp-system-configuration-1151su5_chapter_01010.html

NEW QUESTION: 72

An engineer is configuring a Jabber client installation switch for a phone system using Cisco UCM as the registration server, with a softphone control address of 10.0.1.200. and configuration files received from 10.11.20.201 after all previous configurations are cleared. Drag and drop the snippets from the bottom of the image onto the blanks in the image to complete this configuration. Not all options are used.

The image shows a command prompt window with the following text: `msiexec.exe /i CiscoJabberSetup.msi /quiet CLEAR= [] PRODUCT_MODE= [] AUTHENTICATOR= [] TFTP= [] CTI= []`. Below the command prompt are several draggable options: `10.11.20.201` (Registration), `Phone_Mode` (Phone_Mode), `1` (1), `Jabber` (Jabber), `10.0.1.200` (Clear), `Softphone` (Softphone), `2` (2), and `CUCM` (CUCM). The Cisco logo is visible in the bottom right corner.

Answer:

The image shows the same command prompt window as above, but with the following values filled in: `msiexec.exe /i CiscoJabberSetup.msi /quiet CLEAR= 1 PRODUCT_MODE= Phone_Mode AUTHENTICATOR= CUCM TFTP= 10.11.20.201 CTI= 10.0.1.200`. The corresponding options from the list below are also highlighted in green: `10.11.20.201` (Registration), `Phone_Mode` (Phone_Mode), `1` (1), `Jabber` (Jabber), `10.0.1.200` (Clear), `Softphone` (Softphone), `2` (2), and `CUCM` (CUCM). The Cisco logo is visible in the bottom right corner.

NEW QUESTION: 73

Refer to the exhibit.

The image shows a Windows Event Viewer log entry with the following text: `2014-11-07 09:39:53, 855 ERROR [0X00000298] [ice\TelephonyAdapterPhoneDevice.cpp(178)] [TelephonyAdppter] [TelephonyAdapter::selectDeviceImpl] - switchMode to device [SEP84802D7698D6] failed with error [eDeviceRegCouldNotOpenDevice]`. The Cisco logo is visible in the bottom right corner.

Which end-user option can resolve this issue?

- A. Standard CTI Reception of SRTP Key Material
- B. Standard CTI Allow Calling Number Modification
- C. Standard CTI Allow Call Monitoring
- D. Standard CTI Allow Control of Phones Supporting Rollover Mode

Answer: [\(SHOW ANSWER\)](#)

NEW QUESTION: 74

What prevents toll fraud on voicemail ports?

- A. IP address trusted list on the PSTN gateway
- B. Block OffNet to OffNet Transfer service parameter
- C. FAC
- D. CSS

Answer: [D \(LEAVE A REPLY\)](#)

NEW QUESTION: 75

An engineer is configuring Cisco Unified IM and Presence on-premises SIP Federation. . Assuming the DNS SRV configuration is correct, what should the engineer configure next to resolve this issue?

- A. A static route that points to the internal interface of the external domain.
- B. A static route that points to the external interface of the external domain.
- C. A static route on the external domain points to the external interface.
- D. A dynamic route on the external domain that points to the internal interface.

Answer: [B \(LEAVE A REPLY\)](#)

Explanation/Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/im_presence/interdomain_federation/12_5_1/cup0_b_interdomain-federation-1251su3/cup0_b_interdomain-federation-1251su3_chapter_01.html

NEW QUESTION: 76

An end user opened a ticket, stating that before logging in to Jabber for Windows, a warning is displayed that a server certificate has expired. Which two certificates must be verified on the Cisco Unified Communications Manager and IM&P deployment? (Choose two.)

- A. capf on Cisco Unified CM
- B. cup on IM&P
- C. callmanager on Cisco Unified CM
- D. tomcat on Cisco Unified CM
- E. cup-xmpp on IM&P

Answer: [D,E \(LEAVE A REPLY\)](#)

Valid 300-810 Dumps shared by PrepPdf.com for Helping Passing 300-810 Exam! PrepPdf.com now offer the **newest 300-810 exam dumps**, the PrepPdf.com 300-810 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com 300-810 dumps with Test Engine here: <https://www.preppdf.com/Cisco/300-810-prepaway-exam-dumps.html> (314 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 77

Which CLI command is used to collect traces from the Cisco Presence engine for seven days?

- A. file build log cisco_presence_engine 7
- B. file build log cisco_presence 168
- C. file build log presence_engine 7
- D. file build log presence_engine 168

Answer: (SHOW ANSWER)

Explanation/Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/im_presence/configAdminGuide/12_0_1/cup0_b_config-admin-guide-imp-1201/cup0_b_config-admin-guide-imp-1201_chapter_010101.html

NEW QUESTION: 78

When Cisco IM and Presence is configured to use automatic fallback, how long does the Server Recovery Manager service wait for a failed service/server to remain active before an automatic fallback is initiated?

- A. 10 minutes
- B. 20 minutes
- C. 30 minutes
- D. 1 hour

Answer: (SHOW ANSWER)

Reference:

<https://www.cisco.com/c/en/us/support/docs/unified-communications/unified-communications-manager-im-presence-service/200958-IM-and-Presence-Server-High-Availability.html>

NEW QUESTION: 79

Refer to the exhibit.

```

ccn subsystem sip
 gateway address "172.16.1.254"
 mwi sip unsolicited
end subsystem
!
interface Integrated-Service-Engine1/0
 ip unnumbered Vlan2
 service-module ip address 172.16.1.253.255.255.255.0
 no shut
!
Interface Vlan2
 description "Voice VLAN"
 ip address 172.16.1.254.255.255.0
 no shut
!
sip-ua
 mwi-server ipv4:172.16.1.253 expires 3600 port 5060 transport udp
!

```

A collaboration engineer has integrated Cisco Unity Express with Cisco Unified Communications Manager Express and is experimenting with the MWI feature. With the current configuration, no MWI change occurs when leaving new messages or after playing new messages. Which two changes are needed to correct the configuration? (Choose two.)

- A. sip-ua no mwi-server mwi-server ipv4:172.16.1.254 expires 3600 port 5060 transport udp
- B. sip-ua no mwi-server mwi-server ipv4:172.16.1.253 expires 3600 port 5060 transport tcp notify
- C. ccn subsystem sip mwi sip outcall
- D. sip-ua no mwi-server mwi-server ipv4:172.16.1.253 expires 3600 port 5060 transport udp unsolicited
- E. ccn subsystem sip mwi sub-notify
- F. ccn subsystem sip mwi envelop-info

Answer: A,F (LEAVE A REPLY)

NEW QUESTION: 80

An engineer is configuring a Jabber client installation switch for a phone system using Cisco UCM as the registration server, with a softphone control address of 10.0.1.200. and configuration files received from 10.11.20.201 after all previous configurations are cleared. Drag and drop the snippets from the bottom of the image onto the blanks in the image to complete this configuration. Not all options are used.

```
msiexec.exe /i CiscoJabberSetup.msi /quiet CLEAR= [ ] PRODUCT_MODE= [ ]
AUTHENTICATOR= [ ] TFTP= [ ] CTI= [ ]
```

10.11.20.201 Registration Phone_Mode 1 Jabber

10.0.1.200 Clear Softphone 2 CUCM

Answer:

```
msiexec.exe /i CiscoJabberSetup.msi /quiet CLEAR= 1 PRODUCT_MODE= Phone_Mode
AUTHENTICATOR= CUCM TFTP= 10.11.20.201 CTI= 10.0.1.200
```

10.11.20.201 Registration Phone_Mode 1 Jabber

10.0.1.200 Clear Softphone 2 CUCM

```
msiexec.exe /i CiscoJabberSetup.msi /quiet CLEAR= 1 PRODUCT_MODE= Phone_Mode
AUTHENTICATOR= CUCM TFTP= 10.11.20.201 CTI= 10.0.1.200
```

Registration Jabber

Clear Softphone 2

NEW QUESTION: 81

Which SAML 2.0 profile is supported by Cisco UCM, Cisco Unified IM and Presence, and Unity Connection version 10.x and above?

- A. single logout
- B. web browser SSO
- C. name identifier management
- D. identity provider discovery

Answer: B (LEAVE A REPLY)

NEW QUESTION: 82

Which two protocols does the Cisco IM Presence service use to federate with external domains? (Choose two.)

- A. XMPP
- B. SNMP
- C. SIP
- D. SCCP
- E. SMPP

Answer: A,C (LEAVE A REPLY)

Reference:

https://www.cisco.com/c/dam/en/us/td/docs/voice_ip_comm/cucm/im_presence/interdomain_federation/11_5_1/cup0_b_interdomain-federation-guide-imp-115.pdf

NEW QUESTION: 83

Drag and drop the steps of the SAML SSO process from the left into the order on the right.

The browser issues an HTTPS GET request to the IdP.	step 1
The IdP checks for a valid browser session.	step 2
The IdP generates a SAML response.	step 3
The service provider generates a SAML authentication request.	step 4
The service provider redirects the request to the browser.	step 5
The service provider validates the digital signature.	step 6

Answer:

The browser issues an HTTPS GET request to the IdP.	The service provider generates a SAML authentication request.
The IdP checks for a valid browser session.	The service provider redirects the request to the browser.
The IdP generates a SAML response.	The browser issues an HTTPS GET request to the IdP.
The service provider generates a SAML authentication request.	The IdP checks for a valid browser session.
The service provider redirects the request to the browser.	The IdP generates a SAML response.
The service provider validates the digital signature.	The service provider validates the digital signature.

The service provider generates a SAML authentication request.
The service provider redirects the request to the browser.
The browser issues an HTTPS GET request to the IdP.
The IdP checks for a valid browser session.
The IdP generates a SAML response.
The service provider validates the digital signature.

NEW QUESTION: 84

An administrator is configuring digital networking between Cisco Unity Connection clusters. What are two requirements for the configuration? {Choose two.)
end-user credentials

- A. IP address/FODN of the Cisco Unity Connection servers
- B. IP address/FODN of LDAP server
- C. system administrator credentials
- D. IP address/FQDN of Cisco UCM servers

Answer: A (LEAVE A REPLY)

NEW QUESTION: 85

A collaboration engineer restored a failed primary node of an active/standby IM and presence subcluster with the server Recovery manager set to defaults. The engineer notices that the user is still assigned to the secondary server. Which action resolves this issue?

- A. Wait for 30 minutes for automatic fallback to occur
- B. Restart the services on the primary server
- C. Select the Fallback button under Presence Redundancy Group Configuration
- D. Modify the DNS SRV records to point back to the primary server

Answer: A (LEAVE A REPLY)

NEW QUESTION: 86

An engineer must configure a test user mailbox in a newly deployed Cisco Unity Express module. Which console command set reflects the correct configuration in this scenario?

- A.
- ```
username testuser create
username testuser pin 12345
username testuser phonenumber 4001
voicemail mailbox owner testuser
```
- B.
- ```
username testuser pin 12345
username testuser phonenumber 4001
voicemail mailbox owner testuser
```
- C.
- ```
username testuser phonenumber 4001
username testuser pin 12345
voicemail mailbox owner testuser
```
- D.
- ```
username testuser create
username testuser pin 12345
username testuser phonenumber 4001 testuser@labdomain.com
voicemail mailbox create testuser
```

A. Option A

B. Option C

C. Option D

D. Option B

Answer: A (LEAVE A REPLY)

NEW QUESTION: 87

Which service must be activated on Cisco Unity Connection to utilize LDAP synchronization?

A. Cisco Tomcat

B. Cisco Sync Agent

C. Cisco DirSync

D. Cisco RIS Data Collector

Answer: C (LEAVE A REPLY)

Explanation/Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/connection/10x/administration/guide/10xcucsagx/10xcucsag120.html

NEW QUESTION: 88

Drag and drop the steps from the left into the correct order on the right that describes the flow of presence updates when a user manually sets the presence status in Cisco Jabber. Not all options are used.

User manually sets presence status to "Off Shift"	step 1
Jabber sends an XMPP message on TCP port 5222 to the Cisco Presence Engine via the Cisco XCP Connection Manager and Cisco XCP Router.	step 2
Jabber sends an XMPP message on TCP port 5223 to the Presence Engine via the XCP federation Connection Manager and XCP Router.	step 3
The Presence Engine responds to Jabber via XCP Connection Manager and XCP Router with a confirmation of the status change.	

Answer:

User manually sets presence status to "Off Shift"	User manually sets presence status to "Off Shift"
Jabber sends an XMPP message on TCP port 5222 to the Cisco Presence Engine via the Cisco XCP Connection Manager and Cisco XCP Router.	Jabber sends an XMPP message on TCP port 5223 to the Presence Engine via the XCP federation Connection Manager and XCP Router.
Jabber sends an XMPP message on TCP port 5223 to the Presence Engine via the XCP federation Connection Manager and XCP Router.	The Presence Engine responds to Jabber via XCP Connection Manager and XCP Router with a confirmation of the status change.
The Presence Engine responds to Jabber via XCP Connection Manager and XCP Router with a confirmation of the status change.	

NEW QUESTION: 89

After integrating Cisco Unity Express with Cisco Unified Communications Manager Express, users report that the system does not respond to their digit presses. Which two configuration snippets resolve this issue?

(Choose two.)

- A.** dial-peer voice 6800 voip
destination-pattern 5...
session protocol sipv2
session target ipv4:10.3.6.127
dtmf-relay sip-kpml
codec g711ulaw
- B.** dial-peer voice 6800 voip
destination-pattern 5...
session protocol sipv2

session target ipv4:10.3.6.127

dtmf-relay sip-notify

codec g711ulaw

C. dial-peer voice 6800 voip

destination-pattern 5...

session protocol sipv2

session target ipv4:10.3.6.127

dtmf-relay rtp-nte

codec g711ulaw

D. dial-peer voice 6800 voip

destination-pattern 5...

session protocol sipv2

session target ipv4:10.3.6.127

dtmf-relay sip-kpml

codec g729r8

E. dial-peer voice 6800 voip

destination-pattern 5...

session protocol sipv2

session target ipv4:10.3.6.127

dtmf-relay sip-notify

codec g729r8

Answer: B,C (LEAVE A REPLY)

NEW QUESTION: 90

Refer to the exhibit.

Edit Direct Routing Rule Condition

Direct Routing Rule Edit Refresh Help

Save Delete

Edit Routing Rule Condition

Calling Number Equals

Dialed Number Equals 3005

Port

Phone System

Schedule All hours

Save Delete

Fields marked with an asterisk (*) are required

The associated directory number is configured with Call Forward All to voicemail in Cisco UCM. When users call the directory number they hear the opening greeting. Which action should be taken to correct this issue?

A. Modify the Dialed Number condition from "Equals" to "In".

B. Modify the Calling Number to 3005.

C. Modify the Call Forward All to the voicemail pilot.

D. Modify the rule to a Forward Routing Rule.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 91

Which two methods does Cisco Jabber use for contact searching in an on-premises deployment model? (Choose two.)

- A. SIP
- B. XMPP
- C. UDS
- D. LDAP
- E. HTTP

Answer: C,D ([LEAVE A REPLY](#))

Valid 300-810 Dumps shared by PrepPdf.com for Helping Passing 300-810 Exam! PrepPdf.com now offer the **newest 300-810 exam dumps**, the PrepPdf.com 300-810 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com 300-810 dumps with Test Engine here: <https://www.preppdf.com/Cisco/300-810-prepaway-exam-dumps.html> (314 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 92

Refer to the exhibit.



Users report that they cannot see the Chat Rooms icon on their Cisco Jabber clients. This feature works without issue in the lab. An engineer reviews the Cisco IM&P and Jabber configuration and finds that the jabber-config.xml file is configured properly to support this feature. Which activity should be performed on the IM&P server to resolve this issue?

- A. Activate Cisco XCP Connection Manager in Cisco Unified Serviceability > Tools > Service Activation.
- B. Activate XCP Text Conference Manager in Cisco Unified Serviceability > Tools > Service Activation.
- C. Restart Cisco XCP Message Archiver in Cisco Unified Serviceability > Tools > Control Center - Feature Services.
- D. Restart XCP Text Conference Manager in Cisco Unified Serviceability > Tools > Control Center - Network Services.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 93

A user encounters a problem while checking voicemail, set up in a Cisco UCME and Cisco Unity Express integration. The user reports that when calling the office number from a mobile phone, the call goes to voicemail, but it is then routed to the main menu rather than the voicemail box. The user can check voicemail from an office phone without any issues How is this issue fixed?

- A. Set "Login without PIN" to 'No" for the user.
- B. Add the user to Cisco Unity Express.
- C. Configure a primary E.164 number for the user.
- D. Assign the user to the correct user group.

Answer: B (LEAVE A REPLY)

NEW QUESTION: 94

Refer to the exhibit. A collaboration engineer restored a failed primary node of an active/standby IM and presence subcluster. The engineer notices that users fallback to the node occurred. Which action resolves this issue?

- A. Reboot the primary node
- B. Set the Keep-Alive (Heartbeat) interval to 15.
- C. Wait for the primary node to establish 30 minutes of uptime
- D. Modify the Client Re-Login Limits

Answer: C (LEAVE A REPLY)

NEW QUESTION: 95

Refer to the exhibit.

Cisco Jabber Diagnostics

Cisco Jabber
Version 11.9.3 (60004)

Discovery


Discovery Outcome	Failure: FAILED_UCM90_CONNECTION
Domain Controller	The specified domain either does not exist or could not be contacted.
Edge Domain	ccnp.cisco.com
Edge Required	No
Edge Visibility	Not Visible
Excluded Services	None
FTPS	OFF
Internal Visibility	Visible
Services Domain	ccnp.cisco.com
Services Domain Source	Email Address from Userinput
Voice Services Domain	ccnp.cisco.com

WebEx

CAS lookup	FAILURE: HTTP_CONNECTION_FAILED
CAS lookup url	https://logtop.webexconnect.com/cas/FederatedSSO?org=corp.cisco.com

DNS Records

_cisco-uds._tcp.ccnp.cisco.com.	cucm1.ccnp.cisco.com
_collab-edge._tls.ccnp.cisco.com	Domain does not exist

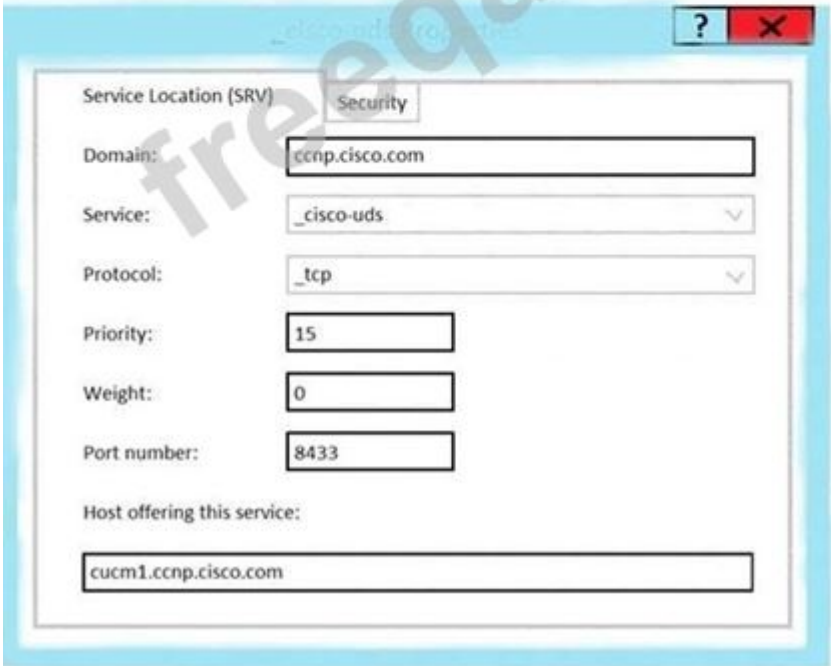

Users connected to the internal network report a "Cannot communicate with the server" error while trying to log in to Cisco Jabber using auto service discovery. The Jabber diagnostics and the SRV record configuration are as shown in the exhibit. The host cucm1.ccnp.cisco.com is correctly resolved by the user desktops with the Cisco Unified Communications Manager IP address. Why is the user not able to log in?

- A. The domain ccnp.cisco.com does not exist on the DNS server.
- B. The port specified on the SRV record is wrong.
- C. Marking weight as 0 on the SRV record makes it inactive, so Jabber cannot discover the Cisco Unified CM.
- D. SRV protocol is not set up correctly. It should be _tls instead of _tcp.

Answer: B (LEAVE A REPLY)

NEW QUESTION: 96

Refer to the exhibit.

```

[csf.cert.] [csf::cert::BaseCertVerifier:doVerifyCertificate] - About to verify the certificate.
[csf.cert.win32] [csf::cert::Win32CertVerifier:loadCertificateChain] - Certificate Chain status 0x20
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifySslPolicy] - Ignoring errors due to Invalid CN
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifyPolicies] - SSL Policy status 0x2148204809
[csf.cert.win32] [csf::cert::win32CertVerifier:verifyPolicies] - Basic Constraints Policy status 0x0
[csf.cert.win32] [csf::cert::win32CertVerifier:verifyCertificate] - Certificate validation response is 'invalid'
[csf.cert.] [csf::cert::BaseCertVerifier:doVerifyCertificate] - Result of platform cert verification: [UNTRUSTED_ROOT]
[csf.cert.] [csf::cert::BaseCertVerifier:checkIdentity] - About to check for an Identity Match.
[csf.cert.xmpp] [csf::cert::XmppCertVerifier:checkIdentifier] - Verifying XMPP Identity 'example.com'
[csf.cert.utils] [csf::cert::AltNameParserImpl:verifyXmpp] - Xmpp match was not found for: 'example.com'
[csf.cert.utils] [csf::cert::AltNameParserImpl:verify] - Match for 'example.com' found in dnsNames index: 1
[csf.cert.] [csf::cert::BaseCertVerifier::checkIdentifiers] - Verification of identity succeeded. Matched identifier : 'example.com'
[csf.diagnostics] [CSFDiagnostics::DiagnosticsImpl::AddRecord] - Add record task enqueued: example.com
[csf.common.PolicySet] [csf::common:PolicySet::getPolicy] - Successfully found Policy with nature IGNORE_INVALID_CERT_CONDITION
[IGNORE_REVOCATION_INFO_UNAVAILABLE_ERRORS]
[csf.cert.] [csf::cert::BaseCertVerifier::applyIgnoreInvalidCertConditionPolicy] - About to enforce ignore invalid cert condition policy.
[csf.cert] [csf::cert::IgnoreInvalidCertConditionPolicy::removeIgnoredStatuses] - No statuses have been removed from the verification status.
[csf.cert] [csf::cert::IgnoreInvalidCertConditionPolicy::enforce] - Policy enforced
[csf.cert.] [csf::cert::BaseCertVerifier:verifyCertificateAsync] - Certificate initially verified, result: FAILURE
[csf.cert] [csf::cert::CertificateDataImpl::parseSubjectCNField] - size of Subject CN field : 16
[csf.cert] [csf::cert::CertificateDataImpl::parseSubjectCNField] - Subject CN field : impa.example.com
[csf.common.PolicySet] [csf::common:PolicySet::getPolicy] - Successfully found Policy with nature INVALID_CERT_MANAGEMENT [PROMPT_USER]

```

Users report that they are prompted to accept server certificates when they initially run Cisco Jabber. An engineer removes these prompts to prevent confusion. Which statement about this scenario is true?

- A. Nothing can be done to resolve this issue because certificates must be accepted by each Jabber user, per Cisco policy.
- B. These certificates are self-signed certificates, so they must be added manually to the user OS certificate stores.
- C. The behavior is a security breach because certificates are considered untrusted and as not coming from Cisco Collaboration servers.
- D. Presentation of the certificates can be disabled by setting up Cisco IM&P servers into nonsecure mode.

Answer: B (LEAVE A REPLY)

NEW QUESTION: 97

Drag and drop the events for an on-premises Jabber SAML SSO flow from the left into the correct order on the right.

Service Provider Authorization request	Step 1
SSO Mode Discovery	Step 2
IDP Authentication	Step 3
Service Provider Authentication	Step 4


Answer:

Service Provider Authorization request	SSO Mode Discovery
SSO Mode Discovery	IDP Authentication
IDP Authentication	Service Provider Authentication
Service Provider Authentication	Service Provider Authorization request



NEW QUESTION: 98

Refer to the exhibit.

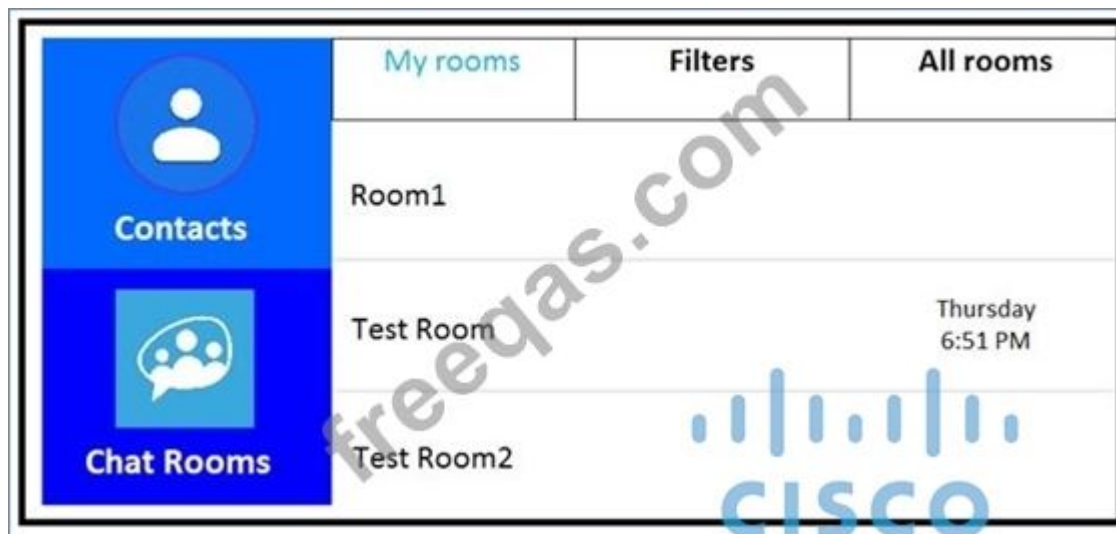

Users report that they cannot see the Chat Rooms icon on their Cisco Jabber clients. This feature works without issue in the lab. An engineer reviews the Cisco IM&P and Jabber configuration and finds that the jabber-config.xml file is configured properly to support this feature. Which activity should be performed on the IM&P server to resolve this issue?

- A. Activate Cisco XCP Connection Manager in Cisco Unified Serviceability > Tools > Service Activation.
- B. Restart Cisco XCP Message Archiver in Cisco Unified Serviceability > Tools > Control Center - Feature Services.
- C. Restart XCP Text Conference Manager in Cisco Unified Serviceability > Tools > Control Center - Network Services.
- D. Activate XCP Text Conference Manager in Cisco Unified Serviceability > Tools > Service Activation.

Answer: D (LEAVE A REPLY)

Reference:

<https://www.cisco.com/c/en/us/support/docs/unified-communications/jabber-windows/118684-probsol-chat-00.html>

NEW QUESTION: 99

Refer to the exhibit.



Discovery

Discovery Outcome	Failure: FAILED_UCM90_CONNECTION
Domain Controller	The specified domain either does not exist or could not be contacted.
Edge Domain	ccnp.cisco.com
Edge Required	No
Edge Visibility	Not Visible
Excluded Services	None
FTPS	OFF
Internal Visibility	Visible
Services Domain	ccnp.cisco.com
Services Domain Source	Email Address from UserInput
Voice Services Domain	ccnp.cisco.com

WebEx

CAS lookup	FAILURE: HTTP_CONNECTION_FAILED
CAS lookup url	https://logiop.webexconnect.com/cas/FederatedSSO?org=corp.cisco.com

DNS Records

_cisco-uds._tcp.ccnp.cisco.com.	cucm1.ccnp.cisco.com
_collab-edge._tls.ccnp.cisco.com	Domain does not exist

_cisco-uds Properties [?] [X]

Service Location (SRV) Security

Domain:

Service:

Protocol:

Priority:

Weight:

Port number:

Host offering this service:

Users connected to the internal network report a "Cannot communicate with the server" error while trying to log in to Cisco Jabber using auto service discovery. The Jabber diagnostics and the SRV record configuration are as shown in the exhibit. The host cucm1.ccnp.cisco.com is correctly resolved by the user desktops with the Cisco Unified Communications Manager IP address. Why is the user not able to log in?

- A. Marking weight as 0 on the SRV record makes it inactive, so Jabber cannot discover the Cisco Unified CM.
- B. The port specified on the SRV record is wrong.
- C. The domain ccnp.cisco.com does not exist on the DNS server.
- D. SRV protocol is not set up correctly. It should be _tls instead of _tcp.

Answer: B (LEAVE A REPLY)

NEW QUESTION: 100

Which two child elements can be in an XMPP message stanza? (Choose two.)

- A. <server/>
- B. <error/>
- C. <client/>
- D. <body/>
- E. <subject/>

Answer: D,E (LEAVE A REPLY)

As described under extended namespaces, a message stanza MAY contain any properly-namespaced child element.

In accordance with the default namespace declaration, by default a message stanza is qualified by the 'jabber:client' or 'jabber:server' namespace, which defines certain allowable children of message stanzas. If the message stanza is of type "error", it MUST include an <error/> child; for details, see [XMPP-CORE]. Otherwise, the message stanza MAY contain any of the following child elements without an explicit namespace declaration:

<subject/>
<body/>
<thread/>

NEW QUESTION: 101

Which two Cisco Unity Connection logs are used to troubleshoot issues with Message Waiting Indicators? (Choose two.)

- A. Connection IMAP Server
- B. Connection Mailbox Sync
- C. Connection Notifier
- D. Connection Message Transfer Agent
- E. Connection Conversation Manager

Answer: C,E (LEAVE A REPLY)

https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/connection/11x/troubleshooting/guide/b_11xcuctsg/b_11xcuctsg_chapter_0101.html#ID-2398-00000004

NEW QUESTION: 102

What is the maximum number of Cisco Unity Connection locations connected in a HTTPS network?

- A. 50
- B. 25
- C. 10
- D. 200

Answer: (SHOW ANSWER)

NEW QUESTION: 103

Refer to the exhibit.

The screenshot shows a configuration window for a directory number. The 'Dialed Number' field is selected with a radio button and set to 'Equals' in a dropdown menu, with the value '3005' entered in the adjacent text box. Other options include 'Port', 'Phone System', and 'Schedule', each with a radio button and a dropdown menu. At the bottom, there are 'Save' and 'Delete' buttons, and a note: 'Fields marked with an asterisk (*) are required.'

The associated directory number is configured with Call Forward All to voicemail in Cisco UCM. When users call the directory number they hear the opening greeting. Which action should be taken to correct this issue?

- A. Modify the Call Forward All to the voicemail pilot.
- B. Modify the rule to a Forward Routing Rule.
- C. Modify the Calling Number to 3005.
- D. Modify the Dialed Number condition from "Equals" to "In".

Answer: B (LEAVE A REPLY)

NEW QUESTION: 104

Drag and drop the events for an on-premises Jabber SAML SSO flow from the left into the correct order on the right.

The interface shows two columns of boxes. The left column contains four cyan boxes with the following text from top to bottom: 'Service Provider Authorization request', 'SSO Mode Discovery', 'IDP Authentication', and 'Service Provider Authentication'. The right column contains four yellow boxes labeled 'Step 1', 'Step 2', 'Step 3', and 'Step 4' from top to bottom.

Answer:

The interface shows the same two columns of boxes. The left column now contains four cyan boxes with the following text from top to bottom: 'Service Provider Authorization request', 'SSO Mode Discovery', 'IDP Authentication', and 'Service Provider Authentication'. The right column contains four cyan boxes labeled 'SSO Mode Discovery', 'IDP Authentication', 'Service Provider Authentication', and 'Service Provider Authorization request' from top to bottom.

NEW QUESTION: 105


Which CLI command is used to collect traces from the Cisco Presence engine for seven days?

- A. file build log presence_engine 168
- B. file build log cisco_presence_engine 7
- C. file build log presence_engine 7
- D. file build log cisco_presence 168

Answer: (SHOW ANSWER)

NEW QUESTION: 106

Refer to the exhibit.

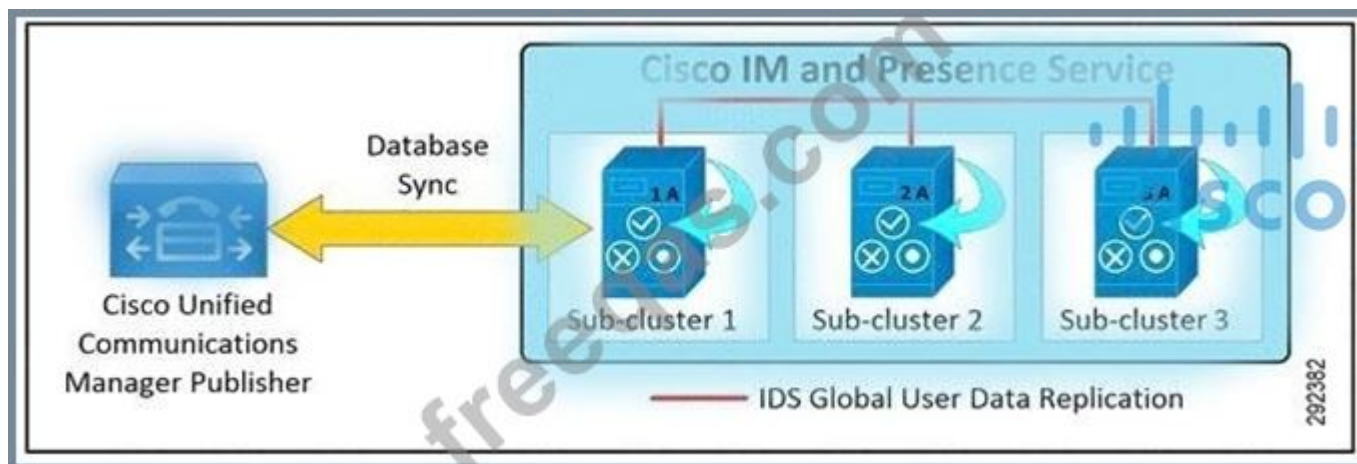

Which statement is true?

- A. Each Cisco IM&P subcluster must have the same number of nodes.
- B. IM&P nodes in each subcluster must be configured from the same OVA template.
- C. The administrator must add one node to each subcluster for high availability.
- D. If the IM&P node in sub-cluster-1 goes down, then users assigned to it are randomly split between the two remaining subclusters.

Answer: C (LEAVE A REPLY)

Valid 300-810 Dumps shared by PrepPdf.com for Helping Passing 300-810 Exam! PrepPdf.com now offer the **newest 300-810 exam dumps**, the PrepPdf.com 300-810 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com 300-810 dumps with Test Engine here: <https://www.preppdf.com/Cisco/300-810-prepaway-exam-dumps.html> (314 Q&As Dumps, **40%OFF Special Discount: Exam-Tests**)

NEW QUESTION: 107

What is the primary mechanism in Cisco Unity Connection that is used for toll fraud prevention?

- A. calling search spaces
- B. transfer rules
- C. fraud tables

Answer: C (LEAVE A REPLY)

NEW QUESTION: 108

What submits credentials to the LDAP server during a call that uses SAML SSO?

- A. Cisco UCM server
- B. IdP
- C. Browser-based Client
- D. Service provider

Answer: (SHOW ANSWER)

NEW QUESTION: 109

Which two command line arguments can you specify when installing Cisco Jabber for windows? (Choose two.)

- A. CISCO_UDS_DOMAIN
- B. TFTP_ADDRESS
- C. VOICEMAIL_SERVER_ADDRESS
- D. SERVICES_DOMAIN
- E. TFTP

Answer: D,E (LEAVE A REPLY)

Explanation/Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/jabber/11_0/CJAB_BK_D657A25F_00_deployment-installation-guide-jabber-110/CJAB_BK_D657A25F_00_deployment-installation-guide-jabber-110_chapter_01100.html#JABW_RF_CE43EF4C_00

NEW QUESTION: 110

What is the maximum number of Cisco Unity Connection locations connected in a HTTPS network?

- A. 50
- B. 25
- C. 200
- D. 10

Answer: (SHOW ANSWER)

Explanation/Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/connection/10x/https_networking/guide/10xcuchttpsnetx/10xcuchttpsnet010.html

NEW QUESTION: 111

A user complains that incoming calls are being forwarded to another extension before being transferred to voicemail. The user expects calls to be transferred to their voicemail faster if they do not answer the phone. The administrator is managing calls with the supervised transfer option on a Cisco Unity Connection call handler. What should the administrator change to resolve this issue?

- A. Release to switch
- B. Rings to wait
- C. No answer ring duration (seconds)
- D. T302 Timer

Answer: (SHOW ANSWER)

NEW QUESTION: 112

How is automatic fallback enabled on a Cisco IM and Presence server?

- A. In IM and Presence Service Parameter Configuration > Cisco Server Recovery Manager, change the Failover parameter to True.
- B. In Communications Manager Service Parameter Configuration > Cisco Server Recovery Manager, change the Enable Automatic Fallback parameter to True.
- C. Automatic fallback is enabled by default.
- D. In the Presence Redundancy Group Configuration > Cisco Unified Communications Manager, check the Enable Automatic Fallback parameter.

Answer: B (LEAVE A REPLY)

Explanation/Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/unified-communications-manager-im-presence-service/200958-IM-and-Presence-Server-High-Availability.html>

NEW QUESTION: 113

Refer to the exhibit.



Monitored Node	Assigned Users	Active Users	Node State	Node Reason
10.48.53.57	1	3	Running in Backup Mode	Critical Service Down
10.48.53.58	2		Failed Over with Critical Services not Running	Critical Service Down

An organization is moving from on-premise Exchange to Microsoft Office 365 for email and calendaring. The administrator would like to maintain meeting presence functionality in Jabber clients connected to Cisco IM and Presence after this move. Office 365 certificates must be installed to accomplish this. Which two trust stores should these certificates be uploaded to on Cisco IM and Presence? (Choose two.)

- A. xmpp-trust
- B. tomcat-trust
- C. cup-trust
- D. cup-xmpp-trust
- E. xmpp-fed-trust

Answer: B,E (LEAVE A REPLY)

NEW QUESTION: 114

Fraudulent calls are being made from Cisco Unity Connection. Which action prevents the calls from reaching the PSTN using SCCP integration?

- A. Remove values from restriction table.
- B. Change the configuration of the routing rule.
- C. Change the Rerouting CSS on the trunk to Cisco Unity Connection.
- D. Change the CSS of the voicemail port.

Answer: D (LEAVE A REPLY)

NEW QUESTION: 115

An engineer is configuring Cisco Unified IM and Presence on-premises SIP Federation. The IM and Presence Service node cannot find the external domain using DNS SRV. Assuming the DNS SRV configuration is Correct. what should the engineer configure next to resolve this issue?

- A. A static route that points to the internal interface of the external domain.
- B. A dynamic route on the external domain that points to the internal Interface.

C. A static route that points to the external Interface of the external domain.

D. A static route on the external domain points to the external interface.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 116

Drag and drop the steps from the left into the correct order on the right that describes the flow of presence updates when a user manually sets the presence status in Cisco Jabber. Not all options are used.

User manually sets presence status to "Off Shift"	step 1
Jabber sends an XMPP message on TCP port 5222 to the Cisco Presence Engine via the Cisco XCP Connection Manager and Cisco XCP Router.	step 2
Jabber sends an XMPP message on TCP port 5223 to the Presence Engine via the XCP Federation Connection Manager and XCP Router.	step 3
The Presence Engine responds to Jabber via XCP Connection Manager and XCP Router with a confirmation of the status change.	

Answer:

User manually sets presence status to "Off Shift"	User manually sets presence status to "Off Shift"
Jabber sends an XMPP message on TCP port 5222 to the Cisco Presence Engine via the Cisco XCP Connection Manager and Cisco XCP Router.	Jabber sends an XMPP message on TCP port 5222 to the Cisco Presence Engine via the Cisco XCP Connection Manager and Cisco XCP Router.
Jabber sends an XMPP message on TCP port 5223 to the Presence Engine via the XCP federation Connection Manager and XCP Router.	The Presence Engine responds to Jabber via XCP Connection Manager and XCP Router with a confirmation of the status change.
The Presence Engine responds to Jabber via XCP Connection Manager and XCP Router with a confirmation of the status change.	

NEW QUESTION: 117

Refer to the exhibit.

High Availability			
<input checked="" type="checkbox"/> Enable High Availability			
Monitored Server	Assigned Users	Active Users	Server State
IMPPub.CiscoLiveUS.net	4	0	Initializing
IMPSub.CiscoLiveUS.net	0	0	Initializing

After configuration of the Cisco IM&P cluster in high-availability mode, both IM&P servers remain in the initializing state. Which two actions ensure normal operations of this IM&P high-availability cluster? (Choose two.)

- A. Clear the Enable High Availability check box in the Presence Redundancy Group configuration.
- B. Confirm that Cisco Presence Engine, Cisco XCP Router, and Cisco DB services are up and running on both IM&P servers.
- C. Restart the Server Recovery Manager service in Cisco Unified Serviceability - Network Services on both IM&P servers.
- D. Verify that the Cisco XCP SIP Federation Connection Manager service is running.
- E. Ensure that an equal number of users are assigned to each IM&P server.

Answer: C,E (LEAVE A REPLY)

Reference:

https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/im_presence/configAdminGuide/10_5_1/CUP0_BK_CE43108E_00_config-admin-guide-imp-105/CUP0_BK_CE43108E_00_config-admin-guide-imp-105_chapter_010010.html

NEW QUESTION: 118

Refer to the exhibit.

Discovery

Discovery Outcome	Failure: FAILED_UCM90_CONNECTION
Domain Controller	The specified domain either does not exist or could not be contacted.
Edge Domain	ccnp.cisco.com
Edge Required	No
Edge Visibility	Not Visible
Excluded Services	None
FIPS	OFF
Internal Visibility	Visible
Services Domain	ccnp.cisco.com
Services Domain Source	Email Address from UserInput
Voice Services Domain	ccnp.cisco.com

WebEx

CAS lookup	FAILURE: HTTP_CONNECTION_FAILED
CAS lookup url	https://login.webexconnect.com/cas/FederatedSSO?org=corp.cisco.com

DNS Records

_cisco-uds._tcp.ccnp.cisco.com.	cucm1.ccnp.cisco.com
_collab-edge._tls.ccnp.cisco.com	Domain does not exist

_cisco-uds Properties

Service Location (SRV)

Security

Domain:

Service:

Protocol:

Priority:

Weight:

Port number:

Host offering this service:

Users connected to the internal network report a "Cannot communicate with the server" error while trying to log in to Cisco Jabber using auto service discovery. The Jabber diagnostics and the SRV record configuration are as shown in the exhibit. The host cucm1.ccnp.cisco.com is correctly resolved by the user desktops with the Cisco Unified Communications Manager IP address. Why is the user not able to log in?


- A. SRV protocol is not set up correctly. It should be _tls instead of _tcp.
- B. Marking weight as 0 on the SRV record makes it inactive, so Jabber cannot discover the Cisco Unified CM.
- C. The port specified on the SRV record is wrong.
- D. The domain ccnp.cisco.com does not exist on the DNS server.

Answer: D (LEAVE A REPLY)

Explanation/Reference: <https://community.cisco.com/t5/collaboration-voice-and-video/jabber-client-login-and-login-issues/ta-p/3143446>

NEW QUESTION: 119

Refer to the exhibit.

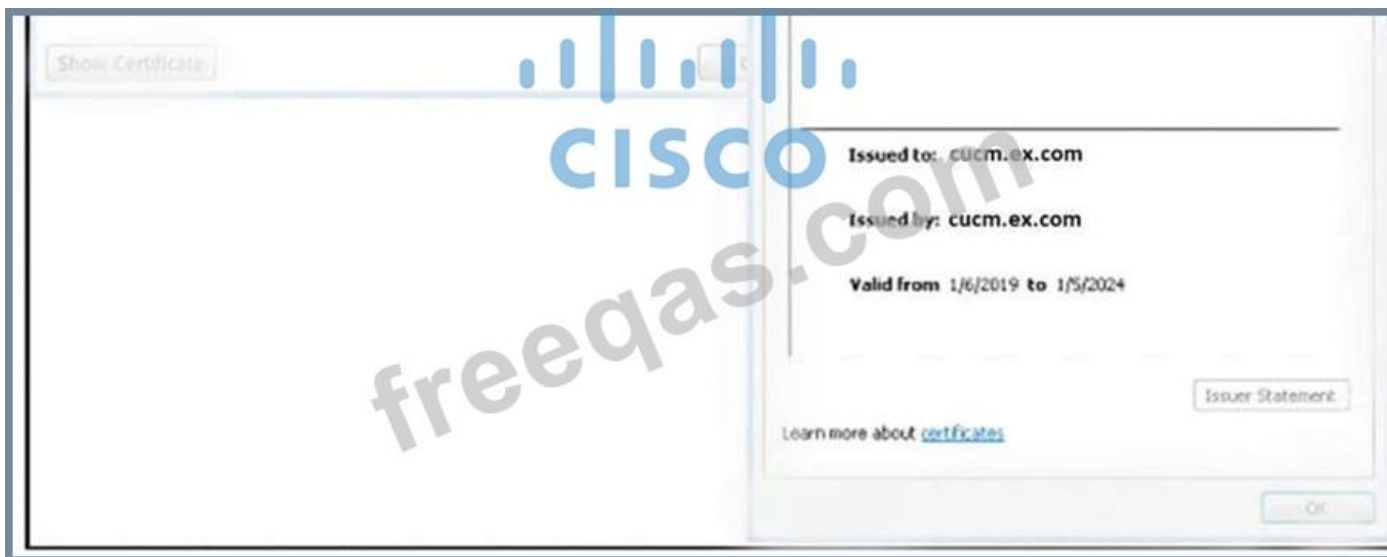

When troubleshooting an internal Jabber login problem, there is a pop-up about a certificate error, and then the login fails. The FQDN of Cisco UCM is cucm.ex.com, and the FQDN of the IM and Presence Server is imp.ex.com. Which two actions should be taken to fix this issue? (Choose two.)

- A. Sign the Cisco Unified IM and Presence server certificate with a trusted authority.
- B. Sign the Cisco UCM CallManager certificate with a trusted certificate authority.
- C. Sign the Cisco UCM tomcat certificate with a trusted certificate authority.
- D. Import the Cisco UCM CallManager certificate into the Trusted Certificate Authorities on the PC running Jabber.
- E. Import the certificate of cucm.ex.com into the Trusted Certificate Authorities on the PC running Jabber.

Answer: B,E (LEAVE A REPLY)

NEW QUESTION: 120

What submits credentials to the LDAP server during a call that uses SAML SSO?

- A. Cisco UCM server
- B. service provider
- C. browser-based client
- D. IdP

Answer: D (LEAVE A REPLY)

Reference:

https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/SAML_SSO_deployment_guide/12_5_1/cucm_b_saml-ss0-deployment-guide-12_5/cucm_b_saml-ss0-deployment-guide-12_5_chapter_01.html

NEW QUESTION: 121

An engineer is configuring a Jabber client installation switch for a phone system using Cisco UCM as the registration server, with a softphone control address of 10.0.1.200. and configuration files received from 10.11.20.201 after all previous configurations are cleared. Drag and drop the snippets from the bottom of the image onto the blanks in the image to complete this configuration. Not all options are used.

The image shows a command prompt window with the following text: `msiexec.exe /i CiscoJabberSetup.msi /quiet CLEAR= [] PRODUCT_MODE= [] AUTHENTICATOR= [] TFTP= [] CTI= []`. Below the command prompt are two rows of configuration options. The first row contains: 10.11.20.201, Registration, Phone_Mode, 1, and Jabber. The second row contains: 10.0.1.200, Clear, Softphone, 2, and CUCM. The Cisco logo is visible in the bottom right corner.

Answer:

The image shows the same command prompt and configuration options as above, but with the correct values filled in. The command prompt now reads: `msiexec.exe /i CiscoJabberSetup.msi /quiet CLEAR= 1 PRODUCT_MODE= Phone_Mode AUTHENTICATOR= CUCM TFTP= 10.11.20.201 CTI= 10.0.1.200`. The configuration options are: 10.11.20.201, Registration, Phone_Mode, 1, Jabber, 10.0.1.200, Clear, Softphone, 2, CUCM. The Cisco logo is visible in the bottom right corner.

Valid 300-810 Dumps shared by PrepPdf.com for Helping Passing 300-810 Exam! PrepPdf.com now offer the **newest 300-810 exam dumps**, the PrepPdf.com 300-810 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com 300-810 dumps with Test Engine here: <https://www.preppdf.com/Cisco/300-810-prepaway-exam-dumps.html> (314 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 122

Refer to the exhibit.

The image shows a screenshot of a Cisco Jabber client interface. At the top, there is an error message: "Invalid credentials for Voicemail Service." Below the error message, there is a "Connect to a device" button and the Cisco logo. The interface also shows a "Connect to a device" button and the Cisco logo.

A Jabber user is unable to access voicemail. During troubleshooting, an administrator captures this screenshot. What are the two ways to resolve this issue? (Choose two.)

A. Ask the user to click on the "Connect to a device" button and use the correct username and password.


- B. Ensure the user is not locally created on Cisco Unity Connection with a password expiring separately from the password that is used for Jabber.
- C. Make sure the Jabber service profile created in Cisco UCM contains Unity Connection UC service with a voicemail server configured.
- D. Ask an administrator to create an account for this user in Cisco Unity Connection but remove the Unity Connection UC service from the Cisco UCM Jabber service profile.

Answer: (SHOW ANSWER)

Check if "OAuth with Refresh Login Flow" is enabled on Cisco Unity Connection but disabled in Cisco UCM.

NEW QUESTION: 123

Refer to the exhibit.

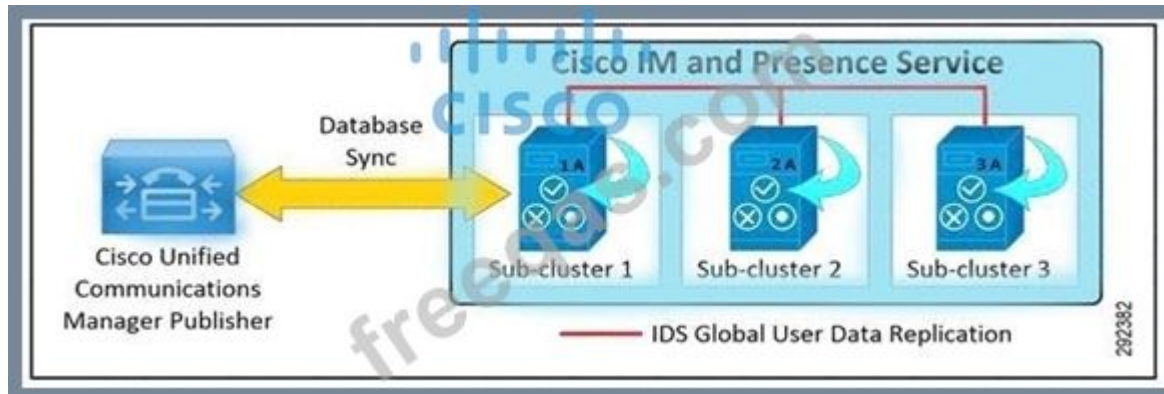

Which statement is true?

- A. IM&P nodes in each subscluster must be configured from the same OVA template.
- B. The administrator must add one node to each subcluster for high availability.
- C. Each Cisco IM&P subcluster must have the same number of nodes.
- D. If the IM&P node in sub-cluster-1 goes down, then users assigned to it are randomly split between the two remaining subclusters.

Answer: (SHOW ANSWER)

NEW QUESTION: 124

What prevents toll fraud on voicemail ports?

- A. IP address trusted list on the PSTN gateway
- B. CSS
- C. Block OffNet to OffNet Transfer service parameter
- D. FAC

Answer: B (LEAVE A REPLY)

Explanation/Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/unity-connection/119337-technote-cuc-00.html>

NEW QUESTION: 125

Which description of an IdP server is true?

- A. authenticates user credentials
- B. provides user authorization
- C. is an authentication request that is generated by a Cisco Unified Communications application
- D. consists of pieces of security information that are transferred to the service provider for user authentication SSO uses Security Assertion Markup Language (SAML) to exchange authentication details between an Identity Provider (IdP) and a service provider. The identity provider authenticates user credentials and

issues SAML assertions, which are pieces of security information transferred from the identity provider to the service provider for user authentication. Each assertion is an XML document that contains trusted statements about a subject including, for example, username and privileges. SAML assertions are usually digitally signed to ensure their authenticity.

Answer: ([SHOW ANSWER](#))

Reference:

https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cust_contact/contact_center/crs/express_11_6_2/features/guide/uccx_b_features-guide-1162/uccx_b_features-guide-1162_chapter_010.html#concept_D4C0DDEE975FE5C9416479AB5D778237

NEW QUESTION: 126

SAML SSO is enabled in Cisco Unified Communications Manager. What happens when a browser-based client attempts to access a protected resource on a service provider?

- A.** The service provider generates a SAML authentication request.
- B.** The browser follows the redirect and issues an HTTPS GET request to the IdP.
- C.** The SAML request is maintained as a query parameter in the GET request.
- D.** The IdP checks for a valid browser session.

Answer: **A** ([LEAVE A REPLY](#))

NEW QUESTION: 127

After integrating Cisco Unity Express with Cisco Unified Communications Manager Express, users report that the system does not respond to their digit presses. Which two configuration snippets resolve this issue? (Choose two.)

- A.** dial-peer voice 6800 voip
destination-pattern 5...
session protocol sipv2
session target ipv4:10.3.6.127
dtmf-relay rtp-nte
codec g711ulaw
- B.** dial-peer voice 6800 voip
destination-pattern 5...
session protocol sipv2
session target ipv4:10.3.6.127
dtmf-relay sip-notify
codec g729r8
- C.** dial-peer voice 6800 voip
destination-pattern 5...
session protocol sipv2
session target ipv4:10.3.6.127
dtmf-relay sip-kpml
codec g711ulaw
- D.** dial-peer voice 6800 voip
destination-pattern 5...
session protocol sipv2

session target ipv4:10.3.6.127

dtmf-relay sip-notify

codec g711ulaw

E. dial-peer voice 6800 voip

destination-pattern 5...

session protocol sipv2

session target ipv4:10.3.6.127


dtmf-relay sip-kpml

codec g729r8

Answer: A,D (LEAVE A REPLY)

NEW QUESTION: 128

Refer to the exhibit.

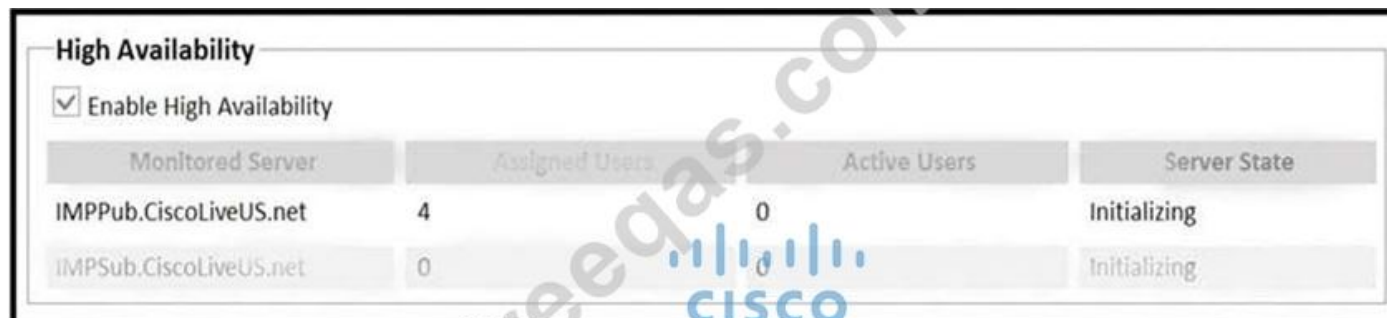

Monitored Server	Assigned Users	Active Users	Server State
IMPPub.CiscoLiveUS.net	4	0	Initializing
IMPSub.CiscoLiveUS.net	0	0	Initializing

After configuration of the Cisco IM&P cluster in high-availability mode, both IM&P servers remain in the initializing state. Which two actions ensure normal operations of this IM&P high-availability cluster? (Choose two.)

A. Ensure that an equal number of users are assigned to each IM&P server.

B. Clear the Enable High Availability check box in the Presence Redundancy Group configuration.

C. Verify that the Cisco XCP SIP Federation Connection Manager service is running.

D. Restart the Server Recovery Manager service in Cisco Unified Serviceability - Network Services on both IM&P servers.

E. Confirm that Cisco Presence Engine, Cisco XCP Router, and Cisco DB services are up and running on both IM&P servers.

Answer: A,D (LEAVE A REPLY)

NEW QUESTION: 129

Refer to the exhibit.

Direct Routing Rules in Descending Order of Precedence					
<input type="button" value="Delete Selected"/> <input type="button" value="Add New"/> <input type="button" value="Change Order"/>					
<input type="checkbox"/>	Display Name	Status	Dialed Number	Calling Number	Phone System
<input type="checkbox"/>	NewYork_AA	Active	11112222		
<input type="checkbox"/>	Attempt Sign In	Active			
<input type="checkbox"/>	Chicago_AA	Active	22221111		
<input type="checkbox"/>	Opening Greeting	Active			
<input type="button" value="Delete Selected"/> <input type="button" value="Add New"/> <input type="button" value="Change Order"/>					
Forwarded Routing Rules in Descending Order of Precedence					
<input type="button" value="Delete Selected"/> <input type="button" value="Add New"/> <input type="button" value="Change Order"/>					
<input type="checkbox"/>	Display Name	Status	Dialed Number	Calling Number	Forwarding Station
<input type="checkbox"/>	Attempt Forward	Active			
<input type="checkbox"/>	Dallas_AA	Active	2222		
<input type="checkbox"/>	Arizona_AA	Active	11112222		
<input type="checkbox"/>	Opening Greeting	Active			
<input type="button" value="Delete Selected"/> <input type="button" value="Add New"/> <input type="button" value="Change Order"/>					

Calls that are not answered by the user are for the location. If the user at extension 11112222 does not have a voice mailbox, which rule is utilized when Cisco Unity Communication receives the forwarded call?

- A. Attempt Sign In
- B. Arizona_AA
- C. Opening_Greeting
- D. NewYork_AA

Answer: B (LEAVE A REPLY)

NEW QUESTION: 130

Refer to the exhibit.

```

Response:
HTTP/1.1 400 Bad Request
Strict-Transport-Security: max-age=31536000
X-Frame-Options: DENY
X-Content-Type-Options: nosniff
Set-Cookie: JSESSIONID=1233ADC137E591GE144792F38123AB09; Patch=/ldb/; Secure; HttpOnly
TrackingID: FOS_d0ac0d7b-f4e4-4d83-ba27-d4252e310b88
Cache-Control: no-store
Date: Mon, 06 Jan 2018 10:30:00 GMT
Accept-Ranges: bytes
Server:
Vary: Accept-Charset, Accept-Encoding, Accept-Language, Accept
Access-Control-Allow-Credentials: true
Access-Control-Allow-Headers: Accept, Authorization, Content-Type, TrackingID
Access-Control-Allow-Methods: POST, PUT, PATCH, HEAD, GET, TRACE, CONNECT, OPTIONS, DELETE
Pragma: no-cache
Content-Type: application/json; charset=UTF-8
Connection: close
Content-Length: 176

{"error_description":"The refresh token provided is expired, revoked, malformed, or invalid.",
"error":"invalid_request","trackingID":"FOS_a12b123c-d123-e123-a127-b420be310188"}

```

Apple Push Notification integration is configured in a Cisco Unified IM and Presence deployment and has been working property. Administrators now report the error "Push notification settings cannot be configured.

400 Bad Request." in the GUI, and HTTP logs are displaying the errors that are shown in the exhibit. Which action solves this issue?

- A. Change the HTTP proxy settings to remove errors in request syntax.
- B. Reboot the IM&P cluster.
- C. Update Refresh Token Manually.
- D. Fix the network connectivity to Apple iCloud.

Answer: C (LEAVE A REPLY)

NEW QUESTION: 131

Refer to the exhibit.

```

[csf.cert.] [csf::cert::BaseCertVerifier:doVerifyCertificate] - About to verify the certificate.
[csf.cert.win32] [csf::cert::Win32CertVerifier:loadCertificateChain] - Certificate Chain status 0x20
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifySslPolicy] - Ignoring errors due to Invalid CN
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifyPolicies] - SSL Policy status 0x2148204809
[csf.cert.win32] [csf::cert::win32CertVerifier:verifyPolicies] - Basic Constraints Policy status 0x0
[csf.cert.win32] [csf::cert::win32CertVerifier:verifyCertificate] - Certificate validation response is 'invalid'
[csf.cert.] [csf::cert::BaseCertVerifier:doVerifyCertificate] - Result of platform cert verification: [UNTRUSTED_ROOT]
[csf.cert.] [csf::cert::BaseCertVerifier:checkIdentity] - About to check for an Identity Match.
[csf.cert.xmpp] [csf::cert::XmppCertVerifier:checkIdentifier] - Verifying XMPP Identity 'example.com'
[csf.cert.utils] [csf::cert::AltNameParserImpl:verifyXmpp] - Xmpp match was not found for: 'example.com'
[csf.cert.utils] [csf::cert::AltNameParserImpl:verify] - Match for 'example.com' found in dnsNames index: 1
[csf.cert.] [csf::cert::BaseCertVerifier:checkIdentifiers] - Verification of identity succeeded. Matched identifier : 'example.com'
[csf.diagnostics] [CSFDiagnostics::DiagnosticsImpl:AddRecord] - Add record task enqueued: example.com
[csf.common.PolicySet] [csf::common:PolicySet:getPolicy] - Successfully found Policy with nature IGNORE_INVALID_CERT_CONDITION
[IGNORE_REVOCATION_INFO_UNAVAILABLE_ERRORS]
[csf.cert.] [csf::cert::BaseCertVerifier::applyIgnoreInvalidCertConditionPolicy] - About to enforce ignore invalid cert condition policy.
[csf.cert] [csf::cert::IgnoreInvalidCertConditionPolicy::removeIgnoredStatuses] - No statuses have been removed from the verification status.
[csf.cert] [csf::cert::IgnoreInvalidCertConditionPolicy::enforce] - Policy enforced
[csf.cert.] [csf::cert::BaseCertVerifier:verifyCertificateAsync] - Certificate initially verified, result: FAILURE
[csf.cert] [csf::cert::CertificateDataImpl::parseSubjectCNField] - size of Subject CN field : 16
[csf.cert] [csf::cert::CertificateDataImpl::parseSubjectCNField] - Subject CN field : impa.example.com
[csf.common.PolicySet] [csf::common:PolicySet:getPolicy] - Successfully found Policy with nature INVALID_CERT_MANAGEMENT [PROMPT_USER]

```

Users report that they are prompted to accept server certificates when they initially run Cisco Jabber. An engineer removes these prompts to prevent confusion. Which statement about this scenario is true?

- A. These certificates are self-signed certificates, so they must be added manually to the user OS certificate stores.
- B. Nothing can be done to resolve this issue because certificates must be accepted by each Jabber user, per Cisco policy.
- C. Presentation of the certificates can be disabled by setting up Cisco IM&P servers into nonsecure mode.

D. The behavior is a security breach because certificates are considered untrusted and as not coming from Cisco Collaboration servers.

Answer: A (LEAVE A REPLY)

NEW QUESTION: 132

Which two command line arguments can you specify when installing Cisco Jabber for Windows? (Choose two.)

- A. CISCO_UDS_DOMAIN
- B. TFTP_ADDRESS
- C. VOICEMAIL_SERVER_ADDRESS
- D. SERVICES_DOMAIN
- E. TFTP

Answer: (SHOW ANSWER)

Explanation

Explanation/Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/jabber/11_0/CJAB_BK_D657A25F_00_deployment-installation-guide-jabber-110/CJAB_BK_D657A25F_00_deployment-installation-guide-jabber-110_chapter_01100.html#JABW_RF_CE43EF4C_00

NEW QUESTION: 133

Refer to the exhibit.



The screenshot shows a 'High Availability' configuration page. At the top, there is a checkbox labeled 'Enable High Availability' which is checked. Below this is a table with four columns: 'Monitored Server', 'Assigned Users', 'Active Users', and 'Server State'. The table contains two rows of data:

Monitored Server	Assigned Users	Active Users	Server State
IMPPub.CiscoLiveUS.net	4	0	Initializing
IMPSub.CiscoLiveUS.net	0	0	Initializing

After configuration of the Cisco IM&P cluster in high-availability mode, both IM&P servers remain in the initializing state. Which two actions ensure normal operations of this IM&P high-availability cluster? (Choose two.)

- A. Confirm that Cisco Presence Engine, Cisco XCP Router, and Cisco DB services are up and running on both IM&P servers.
- B. Ensure that an equal number of users are assigned to each IM&P server.
- C. Restart the Server Recovery Manager service in Cisco Unified Serviceability - Network Services on both IM&P servers.
- D. Verify that the Cisco XCP SIP Federation Connection Manager service is running.
- E. Clear the Enable High Availability check box in the Presence Redundancy Group configuration.

Answer: B,C (LEAVE A REPLY)

NEW QUESTION: 134

Users report issues while logging in to their voicemail using the Voicemail tab in their Cisco Jabber clients. The issue occurs after users provide valid Cisco Unified Communications credentials, but they receive a failure message. What is the cause of this issue?

- A. The voicemail users are not configured in the Cisco Unity Connection server.
- B. The web application voicemail password is set "User Must Change at Next Sign-in".
- C. The voicemail password is not set for all users.
- D. A proper service profile is not configured on Cisco Unified Communications Manager.

Answer: D (LEAVE A REPLY)

NEW QUESTION: 135

What is the maximum number of Cisco Unity Connection locations connected in a HTTPS network?

- A. 50
- B. 25
- C. 200
- D. 10

Answer: B (LEAVE A REPLY)

Reference:

https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/connection/10x/https_networking/guide/10xcuchttpsnetx/10xcuchttpsnet010.html

Valid 300-810 Dumps shared by PrepPdf.com for Helping Passing 300-810 Exam! PrepPdf.com now offer the **newest 300-810 exam dumps**, the PrepPdf.com 300-810 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com 300-810 dumps with Test Engine here: <https://www.preppdf.com/Cisco/300-810-prepaway-exam-dumps.html> (314 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)