

Cisco.300-825.v2022-08-26.q31

Exam Code:	300-825
Exam Name:	Implementing Cisco Collaboration Conferencing
Certification Provider:	Cisco
Free Question Number:	31
Version:	v2022-08-26
# of views:	803
# of Questions views:	310
https://www.freeqas.com/qa/Cisco/300-825/Cisco.300-825.v2022-08-26.q31.html	

NEW QUESTION: 1

Which source does Cisco Meeting Management integrate with to get a directory provisioned?

- A. phonebook service in Cisco TMS
- B. UDS in Cisco UCM
- C. external LDAP
- D. user directory on Expressway-C

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 2

A Cisco Meeting Server administrator upgrades a cluster but encounters an issue that requires downgrading to a previous version. Drag and drop the MMP commands from the left into the order on the right to perform the downgrade. Not all options are used.

upgrade <image>

backup rollback <name>


database cluster upgrade_schema

factory_reset app

step 1

step 2

step 3



Answer:



NEW QUESTION: 3

```
<?xml version="1.0"?>
<coSpace id="2cc9110e-a36a-4173-8cb5-660c3d1e7c92"
<name>CCNP Collaboration</name>
<autoGenerated>>false</autoGenerated>
<uri>8001</uri>
<callId>849274932</callId>
<passcode>1234</passcode>
<secret>XnKexB0yWQ2iwfuoCe6AWQ</secret>
<numAccessMethods>2</numAccessMethods>
</coSpace>
```

Refer to the exhibit. When a user dials 8001 to connect to a space that is hosted on Cisco Meeting Server, the user is prompted for a pin. The prompt says the user should press # to

connect to a meeting without a pin, but guests and hosts must enter a pin before connecting to the meeting.


Which configuration change resolves this issue?

- A. All access methods that are associated with the space must be changed to include a pin.
- B. The secret value must be changed to be solely numeric instead of alpha-numeric.
- C. A callLegProfile must be created and associated with the space so that pins are not optional.
- D. The passcode must be changed to be longer than four digits.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 4

Refer to the exhibit.

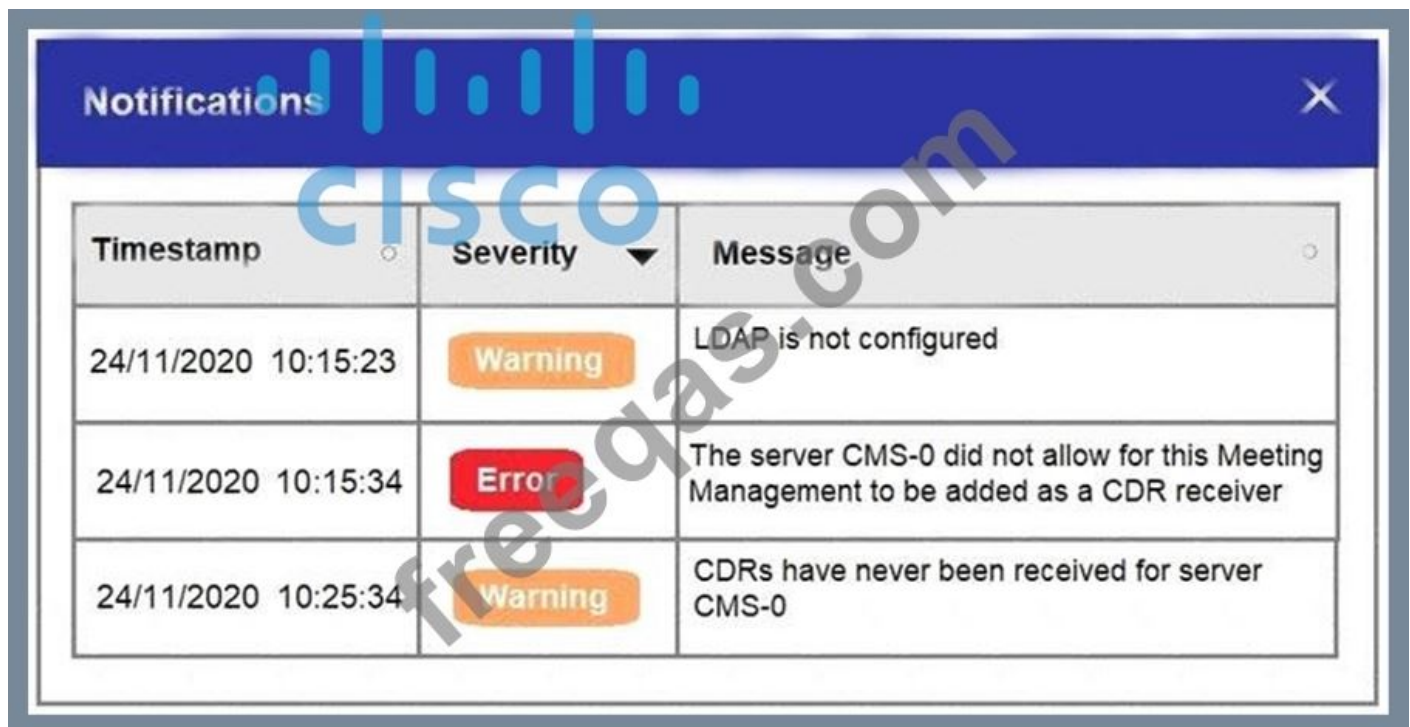

Timestamp	Severity	Message
24/11/2020 10:15:23	Warning	LDAP is not configured
24/11/2020 10:15:34	Error	The server CMS-0 did not allow for this Meeting Management to be added as a CDR receiver
24/11/2020 10:25:34	Warning	CDRs have never been received for server CMS-0

A Cisco Meeting Management operator reports that there is a delay in seeing participants join and leave in the participant list, and there are issues with audio and video mute operations. The administrator investigates and sees notifications in Cisco Meeting Management.

Which step resolves this issue?

- A. Manually set the Cisco Meeting Management CDR address in Cisco Meeting Server and Cisco Meeting Management.
- B. Free a CDR slot on Cisco Meeting Server.
- C. Set the CDR address in Cisco Meeting Management under Settings > CDR.
- D. Change the CDR address to use HTTPS.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 5

To which Skype for Business service does Cisco Meeting Server send media in dual-homed meetings?

- A. CIsAgent

- B. W3SVC
- C. UserServer
- D. AVMCU

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 6

Which two data points must be included in the subject alternate names for a Cisco Meeting Server certificate?

(Choose two.)

- A. FQDN that is used to communicate with the service
- B. administrator code and contract information
- C. URI of spaces that are hosted on the Call Bridge
- D. subject of the certificate
- E. Common Name of the certificate

Answer: D,E ([LEAVE A REPLY](#))

NEW QUESTION: 7

Refer to the exhibit.

guest login request 562763450: resolution in progress

guest login request 562763450: call ID lookup scheduled

guest login request 562763450: resolution in progress

guest login request 562763450: credential storage scheduled (queue length: 1) created guest

account with user ID "quest487660227" guest login request 562763450: credential storage

executed guest login request 562763450: credential storage in progress guest login request

562763450: successfully stored credentials instantiating user "guest487660227" conference

f5771a88-0f36-4b58-8dbd-934aaa579ebf: locked due to lack of lock consensus conference

f5771a88-0f36-4b58-8dbd-934aaa579ebf: lock state has changed to locked API "3.0 Record Test

Space" Space GUID: 71b4f99f-2365-4730-b3d9-d2d61505150c <--> Call Correlator GUID:

334b0c10-6f85-4760-97ab- conference f5771a88-0f36-4b58-8dbd-934aaa579ebf: lock state has

changed to unlocked starting automatic recording (space "3.0 Record Test Space") API call leg

121d2c87-6940-4483-8d3d-71ff162947ba in call f5771a88-0f36-4b58b8dbd-934aaa579ebf (API

call 5a0a7f49-78f8-46fd-add9-4a conference f5771a88-0f36-4b58-8dbd-934aaa579ebf has

control/media GUID:

d7f2d940-c7d9-4421-8f13-7bf94756b08a

conference f5771a88-0f36-4b58-8dbd-934aaa579ebf named "3.0 Record Test Space" unable to

start recording - recorder URI not configured new session created for user "quest487660227" call

49: allocated for guest487660227 "Web" conference participation call 49: configured - API call leg

121d2c87-6940-4483-8d3d-8d3d-71ff162947ba call 49: setting up combined RTP session for

DTLS (combined media and control) participant "quest487660227" joined space

71b4f99f-2365-4730-b3d9-d2d61505150c (3.0 Record Test Space) participant

"quest487660227" (121d2c87-6940-4483-8d3d-71ff162947ba) joined conference

f5771a88-0f36-4b58-8dbd-934aaa579ebf via W call 49: starting DTLS combined media negotiation (as initiator) call 49: completed DTLS combined media negotiation invalid API operation - unhandleable URI /api/v1/recorders user "guest487660227": deactivating due to session resource teardown call 49: tearing down ("guest487660227" conference media) call 449: destroying API call leg 121d2c87-6940-4483-8d3d-71ff162947ba An administrator tries to implement a recording with a Cisco Meeting Server version 3.0 deployment. A separate VM is deployed and configured with the recorder service. During testing, it is discovered that the recording is failing, and the administrator collects logs.

Which configuration step should be completed?

- A. In the Outbound dial rules, the recording domain must have a rule.
- B. In the callLegProfile, recordingControlAllowed must be set to true.
- C. In the CallProfile, the sipRecorderUri must be configured.
- D. In the coSpace configuration, a secondaryUri must be configured.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 8

To which Skype for Business service does Cisco Meeting Server send media in dual-homed meetings?

- A. UserServer
- B. ClsAgent
- C. W3SVC
- D. AVMCU

Answer: D ([LEAVE A REPLY](#))

Explanation/Reference:

<https://www.ciscolive.com/c/dam/r/ciscolive/apjc/docs/2019/pdf/BRKCOL-3111.pdf>

NEW QUESTION: 9



Refer to the exhibit. An administrator wants to set up three Web Bridges in a Cisco Meeting Server cluster.

After the Web Bridge API object for Web Bridge 1 is configured, this error occurs in the Cisco Meeting Server logs: "C2W connection to 'c2w://join.web.com:443' failed (connect failure)".

What should the administrator change to fix this issue?

- A. c2w://192.168.1.23:4444
- B. c2w://192/168/1/23:443
- C. c2w://webbridge1.web.com:4444
- D. c2w://webbridge1.web.com:443

Answer: (SHOW ANSWER)

Explanation/Reference: <https://www.cisco.com/c/en/us/support/docs/conferencing/meeting-server-1000/216028-how-to-configure-webbridge-3-on-cms.pdf>

NEW QUESTION: 10

After performing an upgrade of the Cisco Meeting Server cluster, an engineer sees an error message indicating that Cisco Meeting Server is not licensed. Also, no spaces or users show in the GUI. What should be done to resolve this issue?


- A. The database cluster upgrade_schema command must be run on the new database cluster master.
- B. The Cisco Meeting Server nodes must be re-upgraded using the same file to upgrade all nodes.
- C. The Cisco Meeting Server nodes must be re-upgraded with the database master being first and then all peers.
- D. New database certificates must be generated for each peer in the cluster.

Answer: A (LEAVE A REPLY)

Explanation/Reference:

https://www.cisco.com/c/dam/en/us/td/docs/conferencing/ciscoMeetingServer/Release_Notes/Version-3-0/Cisco-Meeting-Server-Release-Notes-3-0.pdf

NEW QUESTION: 11

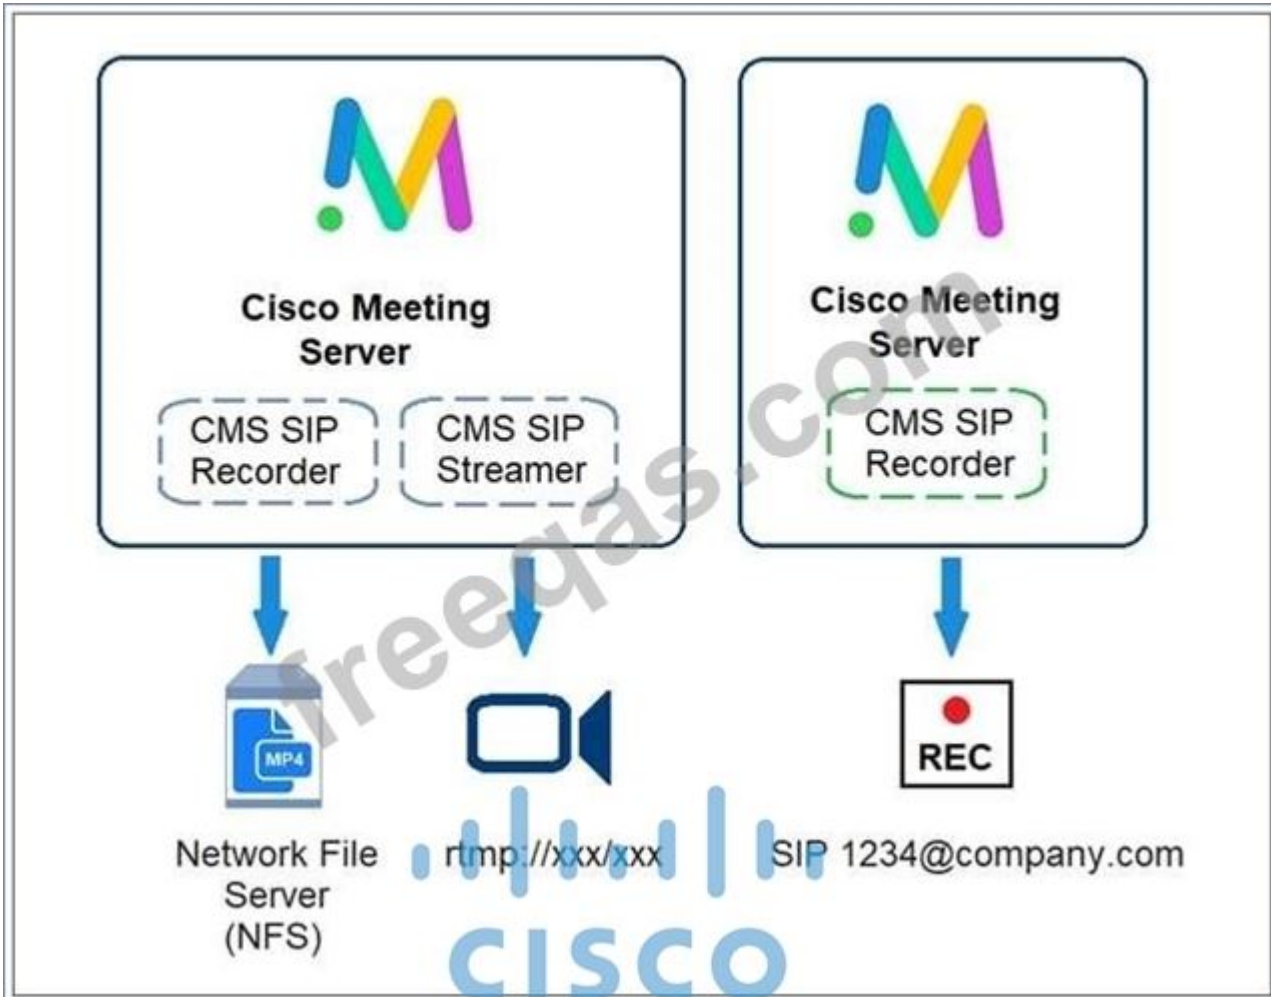

Refer to the exhibit. Which two features are supported in the Cisco Meeting Server recording and streaming solution? (Choose two.)

- A. editing recordings
- B. portal to access recordings
- C. 1080p resolution for streaming
- D. changing layouts
- E. closed captioning in streaming

Answer: D,E (LEAVE A REPLY)

Explanation/Reference:

https://www.cisco.com/c/dam/en/us/td/docs/solutions/PA/mcp/DEPLOYMENT_MEETINGS-CWMS_to_CMS.pdf

NEW QUESTION: 12

Content-Type: application/sdp

Content-Length: 4938

```

v=0
o=Acano 0 0 IN IP4 10.0.101.120
s=-
c=IN IP4 10.0.101.120
b=CT:16
t=0 0
m=audio 50262 RTP/AVP 108 107 109 110 9 99 111 100 104 103 0 8 15 102 18 13 118
101
a=crypto:1 AEAD_AES_128_GCM *****|2^48 a=crypto:2
AEAD_AES_256_GCM
*****|2^48 a=crypto:3
AES_CM_128_HMAC_SHA1_80
*****|2^48
a=crypto:4 AES_CM_128_HMAC_SHA1_32
*****|2^48
<details omitted>
m=video 50264 RTP/AVP 97 116 114 96 34 31 100 121
b=TIAS:16000
a=crypto:1 AEAD_AES_128_GCM *****|2^48 a=crypto:2
AEAD_AES_256_GCM
*****|2^48 a=crypto:3
AES_CM_128_HMAC_sha1_80
*****|2^48
a=crypto:4 AES_CM_128_HMAC_sha1_32
*****|2^48
a=content:main
a=sendrecv
a=sprop-source:1 count=2;policies=cs:1
a=sprop-simul:1 1 *
a=rtcp-fb:* nack pli
a=rtcp-fb:* ccm fir
a=rtcp-fb:* ccm cisco-scr
a=extmap:1 http://protocols.cisco.com/virtualid
a=extmap:2 http://protocols.cisco.com/frame marking
a=rtpmap:97 H264/90000
a=fmtp:97 profile-level-id=42800a;max-mpbs=489600;max-fs=8160;max-cpb=4000;max-
dpd=4752;max-fps=6000 Refer to the exhibit. Users report that they do not see a high-quality
picture on the high-definition endpoints when they call into Cisco Meeting Server. An engineer
must extract the SDP that is offered by Cisco Meeting Server from the SIP traces to troubleshoot.
What is the cause of this issue?

```


A. The SIP call bandwidth is not at a value that supports high-definition video calling.

- B. The AES ciphers are not compatible with high-definition video calling.
- C. The Content-Length value in the SDP does not support high-definition video calling.
- D. Cisco Meeting Server is not configured for H.265 to support high-definition video calling.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 13

Refer to the exhibit.

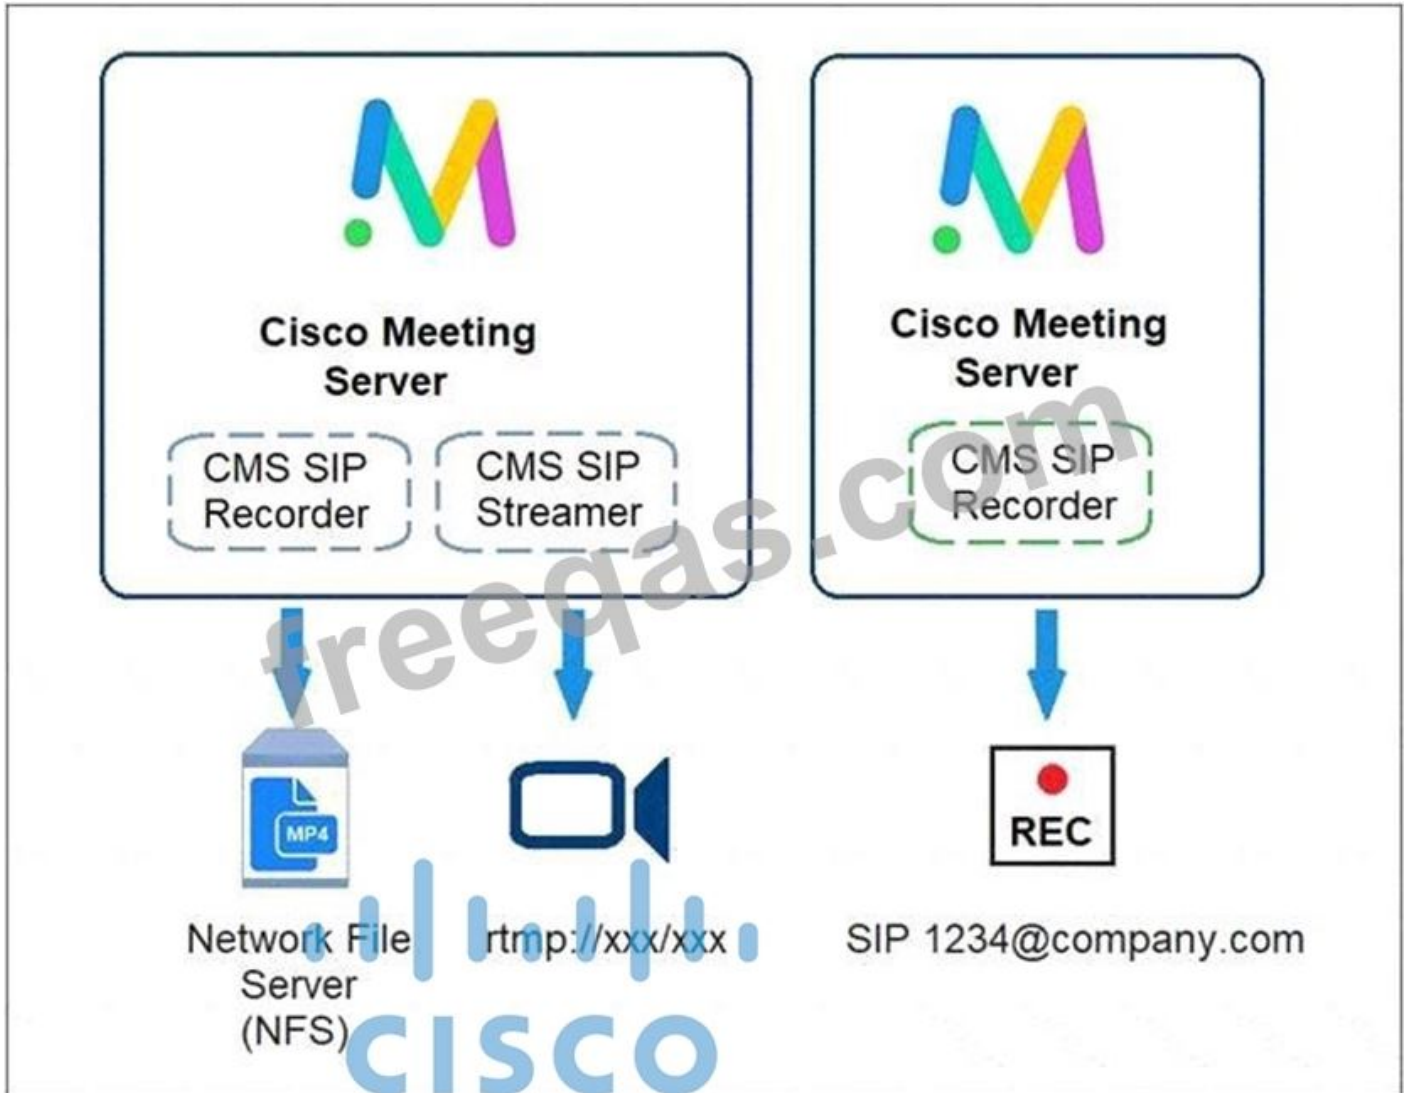

Which two features are supported in the Cisco Meeting Server recording and streaming solution? (Choose two.)

- A. editing recordings
- B. 1080p resolution for streaming
- C. portal to access recordings
- D. closed captioning in streaming
- E. changing layouts

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 14

What is one of the ways Cisco TMS redundancy is configured?

- A. Set up three Cisco TMS servers by using F5 BIG-IP for load balancing IP traffic.
- B. Set up two Cisco TMS servers with a network load balancer in front.
- C. Set up one Cisco TMS server with an SQL database for automatic failover.
- D. Set up one Cisco TMS server by using a Hot Standby model.

Answer: D (LEAVE A REPLY)

NEW QUESTION: 15

An administrator must create conference resources for phones that are registered to Cisco UCM. The administrator adds Cisco Meeting Server as a Conference Bridge to Cisco UCM to accomplish this task.

Where should the administrator add the Conference Bridge to allow phones to use Cisco Meeting Server for conferences?

- A. to a SIP trunk
- B. to a media resource group
- C. to a security profile
- D. to a device pool

Answer: A (LEAVE A REPLY)

NEW QUESTION: 16

User A is attempting to call User B. Both phones are registered to Cisco UCM. User A tries to add a third caller to the conversation but cannot complete the conference. Calls from User A into a Cisco Meeting Server space are working. Upon troubleshooting, it is discovered that the issue is caused by Cisco UCM not trusting a certificate. What certificate must be trusted by Cisco UCM to resolve this issue?

- A. Web Admin
- B. Call Bridge
- C. Database
- D. Web Bridge

Answer: (SHOW ANSWER)

Valid 300-825 Dumps shared by PrepPdf.com for Helping Passing 300-825 Exam!

PrepPdf.com now offer the **newest 300-825 exam dumps**, the PrepPdf.com 300-825 exam **questions have been updated** and **answers have been corrected** get the **newest**

PrepPdf.com 300-825 dumps with Test Engine here: <https://www.preppdf.com/Cisco/300-825-prepaway-exam-dumps.html> (62 Q&As Dumps, **40%OFF Special Discount: Exam-Tests**)

NEW QUESTION: 17

Cisco Meeting Manager is deployed with an LDAP server that is configured with domain lab.local and search attribute sAMAccountName. Which format should be used to log in to an account with the username

"cmsadmin" in this deployment?

- A. lab\cmsadmin
- B. cmsadmin
- C. lab.local\cmsadmin
- D. cmsadmin@lab.local

Answer: D (LEAVE A REPLY)

NEW QUESTION: 18

Refer to the Following:

Content-Type: application/sdp

Content-Length: 4938

v=0

o=Acano 0 0 IN IP4 10.0.101.120

s=-

c=IN IP4 10.0.101.120

b=CT:16

t=0 0

m=audio 50262 RTP/AVP 108 107 109 110 9 99 111 100 104 103 0 8 15 102 18 13 118 101

a=crypto:1 AEAD_AES_128_GCM *****|2^48 a=crypto:2
AEAD_AES_256_GCM

*****|2^48 a=crypto:3

AES_CM_128_HMAC_SHA1_80

*****|2^48

a=crypto:4 AES_CM_128_HMAC_SHA1_32

*****|2^48

<details omitted>

m=video 50264 RTP/AVP 97 116 114 96 34 31 100 121

b=TIAS:16000

a=crypto:1 AEAD_AES_128_GCM *****|2^48 a=crypto:2
AEAD_AES_256_GCM

*****|2^48 a=crypto:3

AES_CM_128_HMAC_sha1_80

*****|2^48

a=crypto:4 AES_CM_128_HMAC_sha1_32

*****|2^48

a=content:main

a=sendrecv

a=sprop-source:1 count=2;policies=cs:1

a=sprop-simul:1 1 *
a=rtcp-fb:* nack pli
a=rtcp-fb:* ccm fir
a=rtcp-fb:* ccm cisco-scr
a=extmap:1 http://protocols.cisco.com/virtualid
a=extmap:2 http://protocols.cisco.com/frame marking
a=rtpmap:97 H264/90000
a=fmtp:97
profile-level-id=42800a;max-mpbs=489600;max-fs=8160;max-cpb=4000;max-dpd=4752;max-fps=6000

Users report that they do not see a high-quality picture on the high-definition endpoints when they call into Cisco Meeting Server. An engineer must extract the SDP that is offered by Cisco Meeting Server from the SIP traces to troubleshoot. What is the cause of this issue?

- A. Cisco Meeting Server is not configured for H.265 to support high-definition video calling.
- B. The AES ciphers are not compatible with high-definition video calling.
- C. The Content-Length value in the SDP does not support high-definition video calling.
- D. The SIP call bandwidth is not at a value that supports high-definition video calling.

Answer: D (LEAVE A REPLY)

NEW QUESTION: 19

An administrator configures a Call Bridge to record meetings. Which two configuration elements tell the Call Bridge where to find the recording server? (Choose two.)

- A. tenants
- B. IVR
- C. DTMF combination
- D. sipRecorderUri
- E. outbound rules

Answer: (SHOW ANSWER)

Explanation/Reference:

https://www.cisco.com/c/dam/en/us/td/docs/conferencing/ciscoMeetingServer/Deployment_Guide/Version-3-0/Cisco-Meeting-Server-3-0-Single-Combined-Server-Deployment.pdf

NEW QUESTION: 20

A customer has a collaboration solution on-premises and is considering a cloud solution for the enterprise.

Which collaboration method should be deployed to protect the existing investment and extend collaboration to the cloud?

- A. Continue to use the on-premises solution and add a cloud solution in parallel.
- B. Refresh hardware and software with the latest releases.
- C. Decommission on-premises equipment and flash cut to a cloud solution.
- D. Move to a hybrid that integrates an existing solution with a cloud solution.

Answer: D (LEAVE A REPLY)

Explanation/Reference: https://www.cisco.com/c/en_in/solutions/collaboration/cloud-collaboration/index.html#~stickynav=1

NEW QUESTION: 21

How should an administrator configure Cisco Meeting Server to limit the number of participants of all conferences to 10?

- A. Set participantLimit to 10 in callLegProfile and apply the callLegProfile to the system.
- B. Set participantLimit to 10 in callProfile and apply the callProfile to the system.
- C. Set participantLimit to 10 in callProfile and apply the callProfile to the coSpace.
- D. Set participantLimit to 10 in callProfile and apply the callLegProfile to the coSpace.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 22



The screenshot shows the 'Overview' page of the Cisco Meeting Management interface. On the left is a dark sidebar with navigation icons for Overview, Meetings, Users, Servers, Logs, Licenses, and Settings. The main content area is titled 'Overview' and contains a 'License status' section. This section lists six clusters with their respective compliance statuses:

- Cluster 1: Out of compliance (Red status bar)
- Cluster 2: Insufficient licenses (Orange status bar)
- Cluster 3: Over 80% threshold (Green status bar)
- Cluster 4: In compliance (Green status bar)
- Cluster 5: Unknown compliance (Grey status bar)
- Cluster 6: Status not available (Grey status bar)

Refer to the exhibit. What does this notification indicate about activity over the last 90 days?

- A. In cluster 2, more licenses have been used than are installed for less than 15 days.
- B. In cluster 3, the license agreement will remain in compliance for 20 more days.
- C. In cluster 4, at least 5 percent of the installed licenses have not been used.
- D. In cluster 6, the license agreement has been out of compliance for more 30 days.

Answer: A ([LEAVE A REPLY](#))

Explanation

NEW QUESTION: 23

In a cluster of Cisco Meeting Servers, one of the peer servers has the FQDN CMS1.local, and the web admin is running on 445. Which server address must be configured in the clustered Call Bridges page?

- A. https://cms1.local
- B. http://cms1.local
- C. https://cms1.local:445
- D. http://cms1.local:445

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 24

What is the purpose of the Call Bridge service within Cisco Meeting Server?

- A. It converts RTP media into MP4 files that can be distributed for replay.
- B. It is the core conferencing service and manages media and signaling.
- C. It connects users from their web browsers into meetings that are hosted on Cisco Meeting Server.
- D. It replicates database information between all nodes in the cluster.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 25

What is the default maximum resolution for the internal streamer?

- A. 1440p
- B. 1080p
- C. 720p
- D. 480p

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 26

An administrator performs a major upgrade of a Cisco Meeting Server cluster that contains multiple database nodes. Which step ensures that the Call Bridge can use the database?

- A. The master database node must be the first server to complete the upgrade process.
- B. The command database cluster upgrade_schema must be run on the master database node.
- C. The master database node must create a new database cluster and join the peer servers.
- D. The command database cluster initialize must be run on the master database node.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 27

An engineer configures Cisco Meeting Server with Expressway for external web app access and must enable participants to use the web app to join conferences that are hosted on the meeting server. Which service should be used in the Expressway-E accomplish this goal?

- A. Cisco Meeting Server
- B. SIP
- C. XMPP server
- D. TURN

Answer: D ([LEAVE A REPLY](#))

Explanation/Reference:

<https://www.cisco.com/c/dam/en/us/td/docs/conferencing/ciscoMeetingServer/Installation/Cisco-Meeting-Server-Deployment-Planning-and-Preparation-with-Expressway-Guide.pdf>

NEW QUESTION: 28

An engineer must configure Cisco Meeting Server integration to Cisco UCM. Which DNS A record must be configured to accomplish this goal?

- A. Cisco UCM Subscriber
- B. Call Bridge
- C. SRV
- D. Conference Name

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 29

An administrator must create conference resources for phones that are registered to Cisco UCM. The administrator adds Cisco Meeting Server as a Conference Bridge to Cisco UCM to accomplish this task.

Where should the administrator add the Conference Bridge to allow phones to use Cisco Meeting Server for conferences?

- A. to a device pool
- B. to a media resource group
- C. to a SIP trunk
- D. to a security profile

Answer: C ([LEAVE A REPLY](#))

Explanation/Reference: <https://www.cisco.com/c/en/us/support/docs/conferencing/meeting-server/213820-configure-cisco-meeting-server-and-cucm.html>

NEW QUESTION: 30

Which two protocols should be used to back up Cisco Meeting Server? (Choose two.)

- A. HTTP
- B. SSH
- C. SFTP
- D. HTTPS

E. SIP

Answer: B,C ([LEAVE A REPLY](#))

NEW QUESTION: 31

Refer to the exhibit.



A company wants external users to use the web app, and the administrator must configure TURN. Which two values for clientAddress and serverAddress should the administrator configure? (Choose two.)

- A. Server Address - 10.4.26.98
- B. Server Address - 192.168.1.23
- C. Client Address - 192.168.1.23
- D. Client Address - 203.0.113.167
- E. Server Address - 203.0.113.167
- F. Client Address - 10.4.26.98

Answer: B,D ([LEAVE A REPLY](#))

Valid 300-825 Dumps shared by PrepPdf.com for Helping Passing 300-825 Exam!
PrepPdf.com now offer the **newest 300-825 exam dumps**, the PrepPdf.com 300-825 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com 300-825 dumps with Test Engine here: <https://www.preppdf.com/Cisco/300-825-prepaway-exam-dumps.html> (62 Q&As Dumps, **40%OFF Special Discount: Exam-Tests**)

Valid 300-825 Dumps shared by PrepPdf.com for Helping Passing 300-825 Exam!
PrepPdf.com now offer the **newest 300-825 exam dumps**, the PrepPdf.com 300-825 exam **questions have been updated** and **answers have been corrected** get the **newest**

PrepPdf.com 300-825 dumps with Test Engine here: <https://www.preppdf.com/Cisco/300-825-prepaway-exam-dumps.html> (62 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)