

EMC.DEA-5TT2.v2023-07-10.q21

Exam Code:	DEA-5TT2
Exam Name:	Associate - Networking Exam
Certification Provider:	EMC
Free Question Number:	21
Version:	v2023-07-10
# of views:	432
# of Questions views:	210
https://www.freeqas.com/qa/EMC/DEA-5TT2/EMC.DEA-5TT2.v2023-07-10.q21.html	

NEW QUESTION: 1

Router A is directly connected to Router B over an Ethernet link. The local interface address for the Router A Fo0/48 interface is 144.254.32.2/24. Which routing table entry is visible on Router A?

- A. 144.254.0.0/16
- B. 144.254.32.0/24
- C. 144.254.0.0/24
- D. 144.254.32.2/24

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 2

What accurately describes the Simple Network Time Protocol (SNTP)?

- A. Implemented on a Dell EMC Network OS 9 and OS 10.
- B. Client synchronizes among a set of distributed time servers.
- C. Time synchronization algorithms are more complex and account for clock drift.
- D. Client makes sudden changes in time to keep synchronized.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 3

Which Border Gateway Protocol (BGP) version supports IPv6?

- A. BGPng
- B. BGPv4
- C. BGPv3
- D. BGPv2

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 4

Which IP address is in the Class B range?

- A. 191.56.44.200
- B. 192.15.48.130
- C. 100.100.90.87
- D. 126.16.20.48

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 5

Which Layer 1 device can be used to enlarge the area covered by a single LAN segment?

- A. Router
- B. NIC
- C. Repeater
- D. Switch

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 6

What is the default route preference value for a Border Gateway Protocol (BGP) internal route?

- A. 40
- B. 253
- C. 200
- D. 110

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 7

What is the bandwidth of an RPM for a C9010 Network Director?

- A. 2.56 Mbps
- B. 2.56 Tbps
- C. 1.52 Tbps
- D. 200 Mbps

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 8

On Switch A, a static route has been redistributed into OSPF. Which type of OSPF router will this process make Switch A?

- A. Backbone Router (BR)
- B. Autonomous System Boundary Router (ASBR)
- C. Area Border Router (ABR)
- D. Designated router (DR)

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 9

Which route type is added to the routing table by a routing protocol?

- A. Directly connected
- B. Dynamic
- C. Default route
- D. Static

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 10

Which criteria is used to define an extended MAC ACL filter?

- A. Destination TCP port number and source MAC address
- B. Destination MAC address and Ethernet frame type
- C. Ethernet frame type and frame size
- D. Source and destination MAC addresses

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 11

A network administrator created three VLANs on an Ethernet switch. How many broadcast domains are created by the switch?

- A. 1
- B. 3
- C. 2
- D. 4

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 12

A network administrator has a stack of four Dell EMC Networking S4800 Series switches. Each stack unit is configured with a different priority. Which switch will be elected as the management device?

- A. Switch with priority 21
- B. Switch with priority 14
- C. Switch with priority 1
- D. Switch with priority 0

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 13

Which IPv4 address is in the same network as the IP address 182.15.24.40/23 and assignable to a host device?

- A. 182.15.26.10
- B. 182.15.25.255
- C. 182.15.25.0
- D. 182.15.23.224

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 14

What are the Protocol Data Units (PDUs) called at the Transport layer?

- A. Packets
- B. Segment
- C. Data Payload
- D. Frame

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 15

Which Ethernet frame forwarding method works best when the outbound ports run at the same speed as the inbound port?

- A. Fragment-free
- B. Unicast
- C. Cut-through
- D. Store-and-forward

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 16

How many total addresses for network, broadcast, and host are provided with the subnet mask 255.255.255.240?

- A. 24
- B. 48
- C. 8
- D. 16

Answer: D ([LEAVE A REPLY](#))

Valid DEA-5TT2 Dumps shared by PrepPdf.com for Helping Passing DEA-5TT2 Exam! PrepPdf.com now offer the **newest DEA-5TT2 exam dumps**, the PrepPdf.com DEA-5TT2 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com DEA-5TT2 dumps with Test Engine here:

<https://www.preppdf.com/EMC/DEA-5TT2-prepaway-exam-dumps.html> (62 Q&As Dumps,

40%OFF Special Discount: Exam-Tests)

NEW QUESTION: 17

Which fields are mandatory TLVs in a LLDP PDU frame?

- A. Port Description, System Name, and System Description
- B. Chassis ID, Port ID, and Time-to-Live


C. System Capabilities and Management Address

D. IP Address, Default Gateway, and DNS

Answer: B (LEAVE A REPLY)

NEW QUESTION: 18


The IEEE separates the Data Link and Physical ISO layers into four sub-layers. Based on the exhibit, what is the correct order of these sub-layers; from lowest to highest?

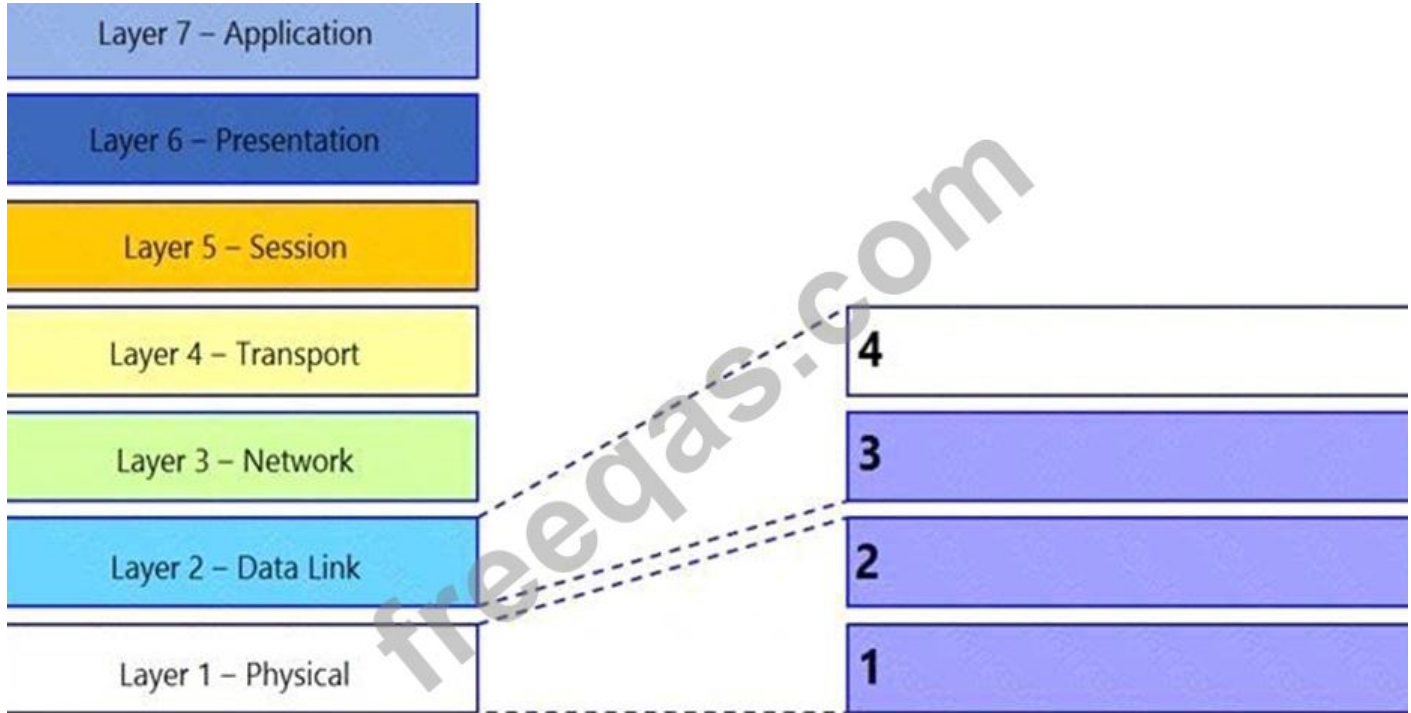


DELL EMC Ethernet-specific



Answer:

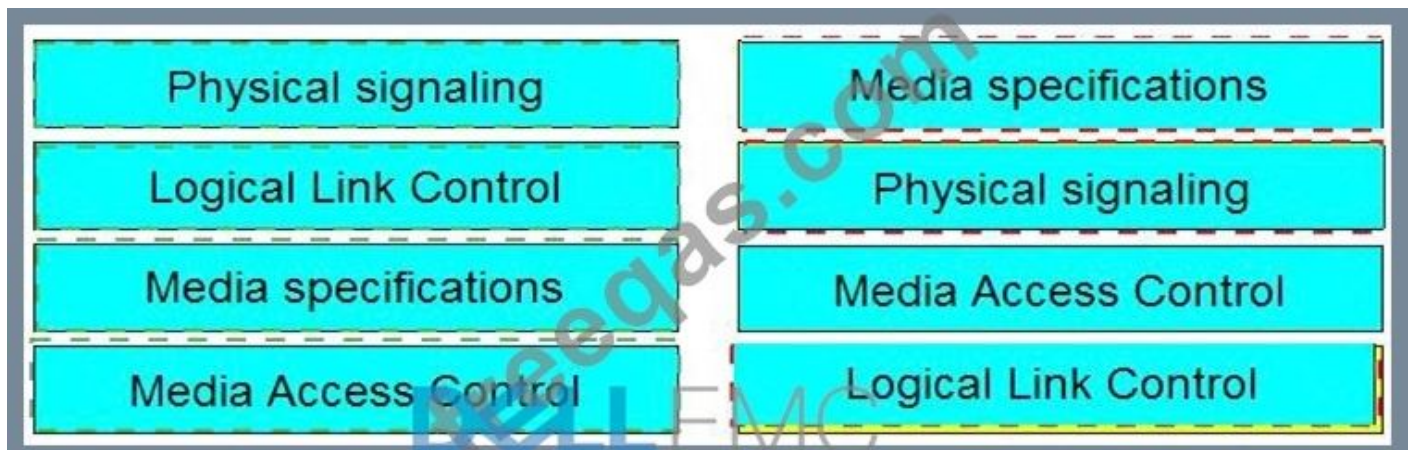

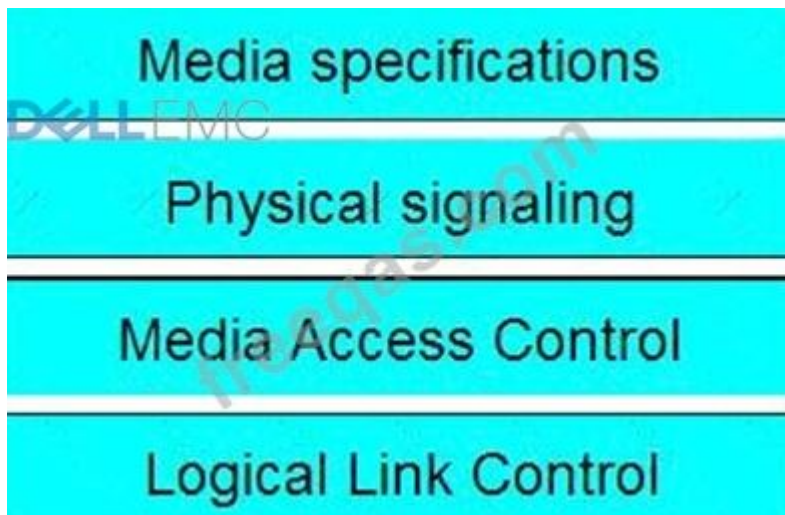

NEW QUESTION: 19

You recently joined a company as a junior-level network administrator. You have been tasked with designing the IPv4 scheme for five networks that will be used for training classrooms. These networks need to support no more than 28 devices each. Due to the existing network design, the senior-level network administrator has asked you to work on network 192.168.40.0/24.

If all networks must be made to logically start with the lowest numbered network and end with the largest numbered network, what is the network ID for the third network?

- A. 192.168.40.32/27
- B. 192.168.40.128/27
- C. 192.168.40.96/27
- D. 192.168.40.64/27

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 20

How is a switch different from a hub?

- A. A switch decreases the number of broadcast storms.
- B. A switch tracks MAC addresses of all connected devices.
- C. A switch does not include any latency into the frame transfer time.
- D. A switch operates at a lower, more efficient layer of the OSI model.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 21

What accurately describes the comparison between stacking and VLT?

- A. VLT allows for more physical devices to appear as one virtual device than stacking does.
- B. Both VLT and stacking allow devices to use different versions of firmware provided that the switch family/ series is the same.
- C. Stacked switches share a common control plane while VLT peers maintain their own control plane.

D. Stacked switches and VLT peers allow "single pane of glass" management by maintaining a single control plane.

Answer: C ([LEAVE A REPLY](#))

Valid DEA-5TT2 Dumps shared by PrepPdf.com for Helping Passing DEA-5TT2 Exam!
PrepPdf.com now offer the **newest DEA-5TT2 exam dumps**, the PrepPdf.com DEA-5TT2 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com DEA-5TT2 dumps with Test Engine here:

<https://www.preppdf.com/EMC/DEA-5TT2-prepaway-exam-dumps.html> (62 Q&As Dumps,

40%OFF Special Discount: Exam-Tests)