

EMC.DES-4122.v2022-04-12.q20

Exam Code:	DES-4122
Exam Name:	Specialist - Implementation Engineer, PowerEdge Exam
Certification Provider:	EMC
Free Question Number:	20
Version:	v2022-04-12
# of views:	676
# of Questions views:	200
https://www.freeqas.com/qa/EMC/DES-4122/EMC.DES-4122.v2022-04-12.q20.html	

NEW QUESTION: 1

What is a consideration when populating DIMMs with different types of persistent memory in a Dell EMC PowerEdge 14G server?

- A. NVDIMMs can be mixed only with LRDIMMs
- B. NVDIMMs cannot be mixed with RDIMMs
- C. LRDIMMs can be mixed only with RDIMMs
- D. RDIMMs can be mixed only with NVDIMMs

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 2

An engineer is checking a newly delivered Dell EMC PowerEdge R640 server that will be deployed for a new database environment. The inventory consists of:

- 1 PowerEdge R640 Server
- 1 Hot-plug Power Supply, 750W - qty 1
- Jumper Cord - C13/C14, 4M, 250V, 10A - qty 1
- Broadcom 57412 Dual Port 10GbE SFP+ and 5720 Dual Port 1GbE BASE-T rNDC - qty 1
- SFP+ SR Optic, 10GbE - qty 2
- Dell Networking, Cable, SFP+ to SFP+, 10GbE, Copper Twinax DAC, 3 Meter - qty 2
- CAT6 Patch cable 5 Meters - qty 2

The server power configuration will be set for gnd redundancy. The management switch is 1000 Base-T and the top of rack switches 10Gb. What additional component(s) is needed for this configuration?

- A. C20 to C21, PDU style, 250 V, 16 Amp, 3.5 meters power cord - qty 2
- B. Hot-plug power supply, 1100W - qty 1
- C. Dell Networking, cable, 40GbE (QSFP+) to 4 x 10GbE SFP+ passive copper breakout cable, 3 meters - qty 2
- D. Hot-plug power supply, 750 W - qty 1

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 3

What is the minimum number of components, beside the system board, required to POST?

- A. 1 PSU, 1 CPU, 1 DIMM, and PERC SAS controller
- B. 1 PSU, 1 DIMM, and 1 CPU only
- C. 1 PSU and 1 CPU only
- D. PSUs, CPUs, and DIMMs as configured in BIOS

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 4

What is a key distinction between iDRAC8 and iDRAC9?

- A. iDRAC9 offers HTML5 based GUI
- B. iDRAC8 default credentials are customer orderable
- C. iDRAC9 default credentials are root/calvin orderable only
- D. iDRAC8 offers HTML5 based GUI

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 5

How can a technician know whether iDRAC9 System Lockdown mode is enabled?

- A. Lockdown activation message in red box in the iDRAC web GUI Access to LCC is disabled when the server boots
- B. Lockdown activation message in yellow box in the iDRAC web GUI Access to LCC is disabled when the server boots
- C. Lockdown activation message in red box in the iDRAC web GUI Access to LCC requires a password when the server boots
- D. Lockdown activation message in yellow box in the iDRAC web GUI Access to LCC requires a password when the server boots

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 6

What must be done before upgrading OMSA from the 32-bit to the 64-bit version?

- A. Back up the configuration
- B. Uninstall the earlier version
- C. Save the license file
- D. Disable UAC

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 7

What is a valid password option available from the iDRAC9 Unique ID feature?


- A. Randomly Generated
- B. Encryption Default
- C. Legacy Generated

D. Secure Default

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 8

For a temporary migration task the CPU core count on the Dell EMC PowerEdge R640 server needs to be reduced to 8 because the installed application will not work due to license restrictions. Use the simulator to apply the change so the application can be installed. When you have finished using the simulator, click Next.

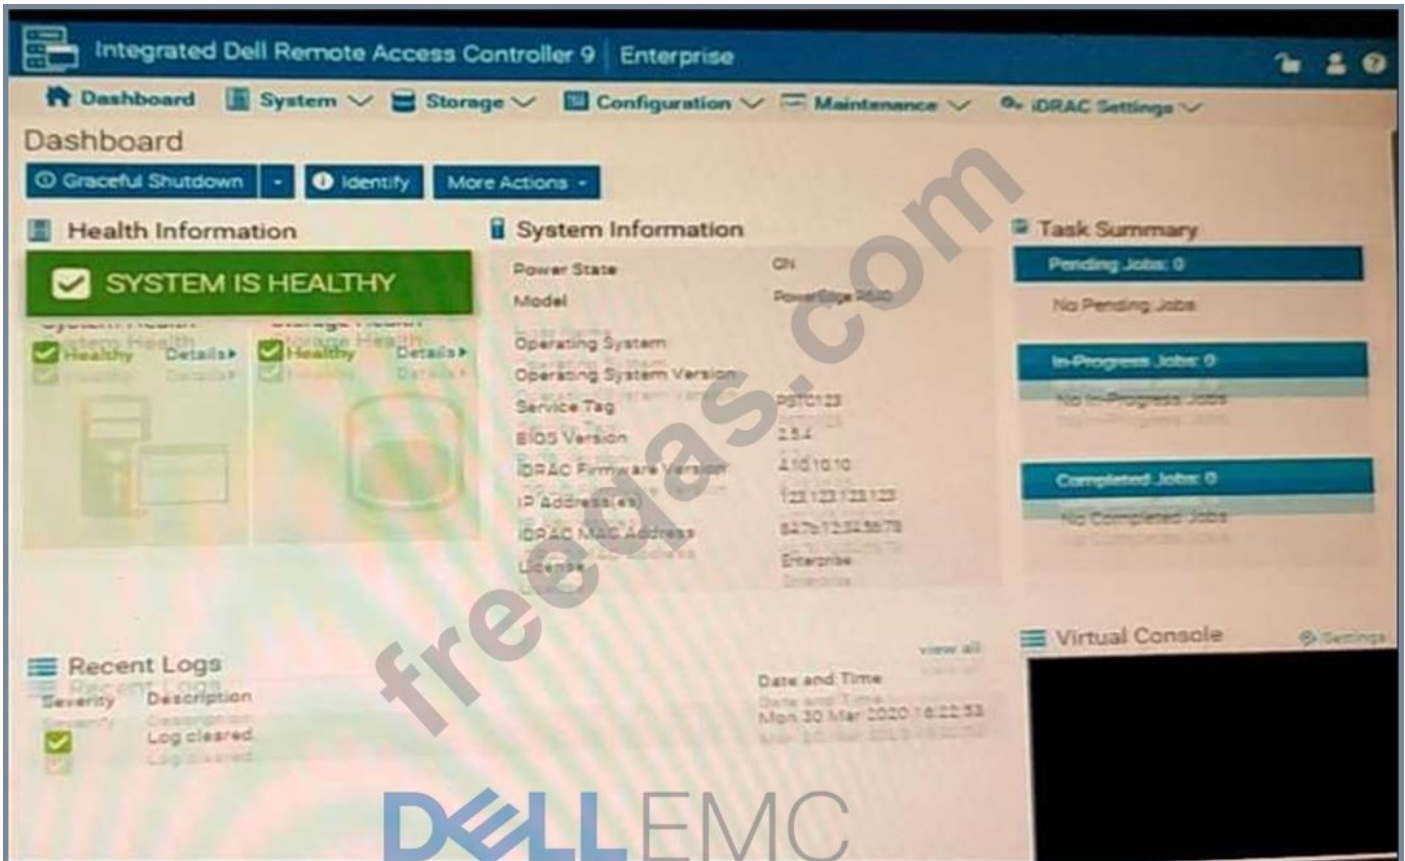

Answer:

Send us your suggestion for this simulation task.

NEW QUESTION: 9

A technician is sent on-site to troubleshoot a server that produced an error message during the most recent POST, but then completed the POST and booted to the operating system. The user cannot remember the specific error and no entry was made in the error log relating to this error. How can the technician find out what the error message was?

- A. Reload the BIOS firmware
- B. Access the iDRAC and view the last boot cycle video capture entry
- C. Export the Server profile and analyze for any POST errors
- D. Access the Lifecycle Controller and view the last boot cycle video capture entry

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 10

Which mobile devices are supported by Quick Sync 2.0 in 14G PowerEdge servers?

- A. iOS devices only
- B. iOS and Android devices only
- C. Android devices only
- D. iOS, Android, and Windows Phone devices

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 11

How can the ePSA be accessed?

- A. VMware vSphere plug-in
- B. iDRAC
- C. OMSA
- D. Lifecycle Controller

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 12


A technician working with a Dell EMC PowerEdge 1 take corrective action?

- A. Check the System Event Log
Check PSU LED
Reseat the PSU
- B. Check the LCC Log
Check PSU LED
Reseat the CPU
- C. Check the LCC Log
Check PSU LED
Reseat the PSU
- D. Check the System Event Log
Check PSU LED
Do a virtual reseat of the iDRAC

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 13

You are Investigating a disk error on a Dell EMC PowerEdge server and discover a Hot Spare has not been assigned to the Virtual Disk Group. Use the simulator to assign the Global Hot Spare. When you have finished using the simulator, click Next.

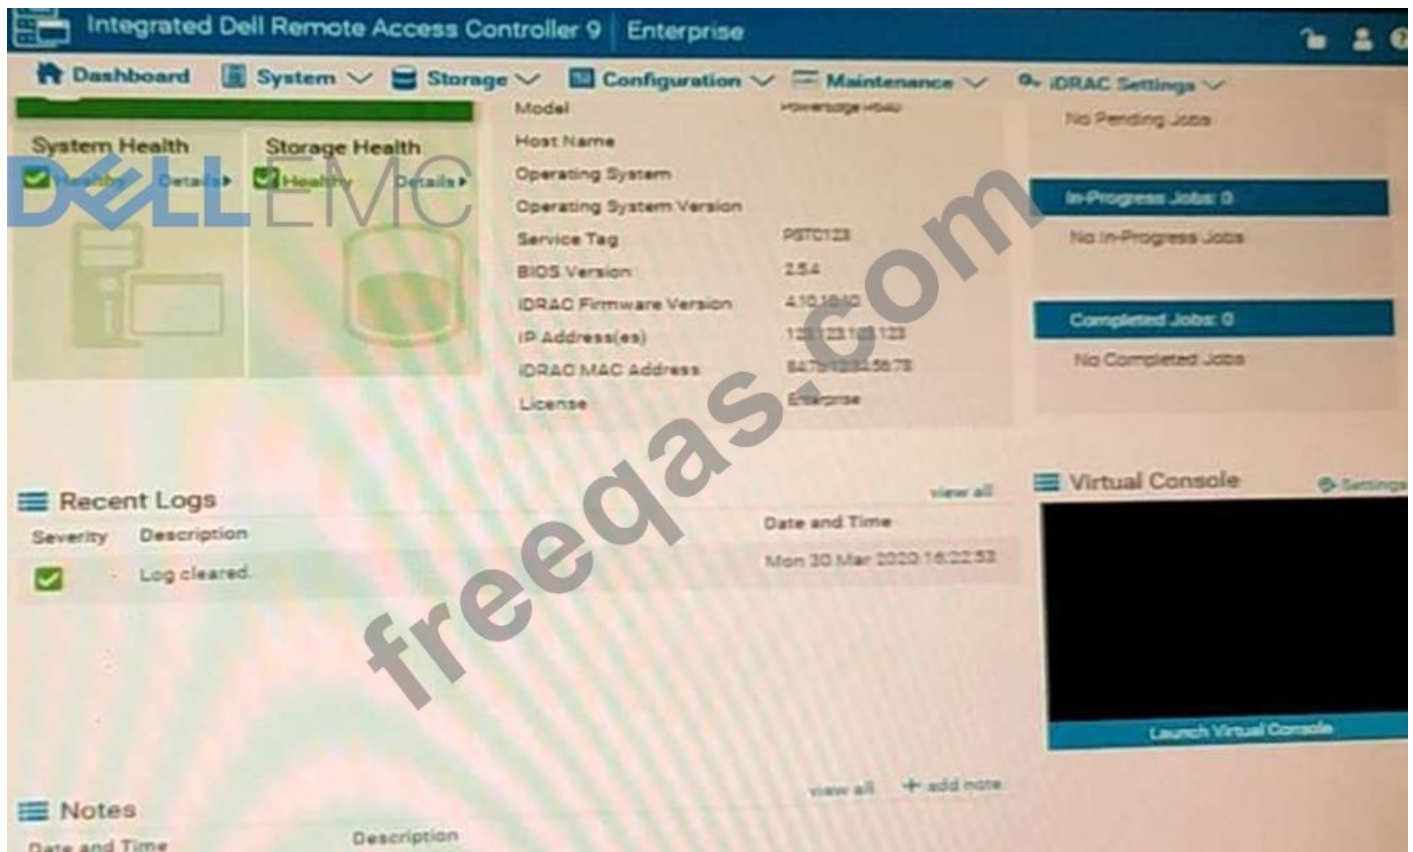


Answer:

Send us your suggestion for this simulation task.

NEW QUESTION: 14

For security reasons, the Dell EMC PowerEdge server power button must be disabled. Use the System Setup Utility in the simulator to disable the power button. When you have finished using the simulator, click Next.

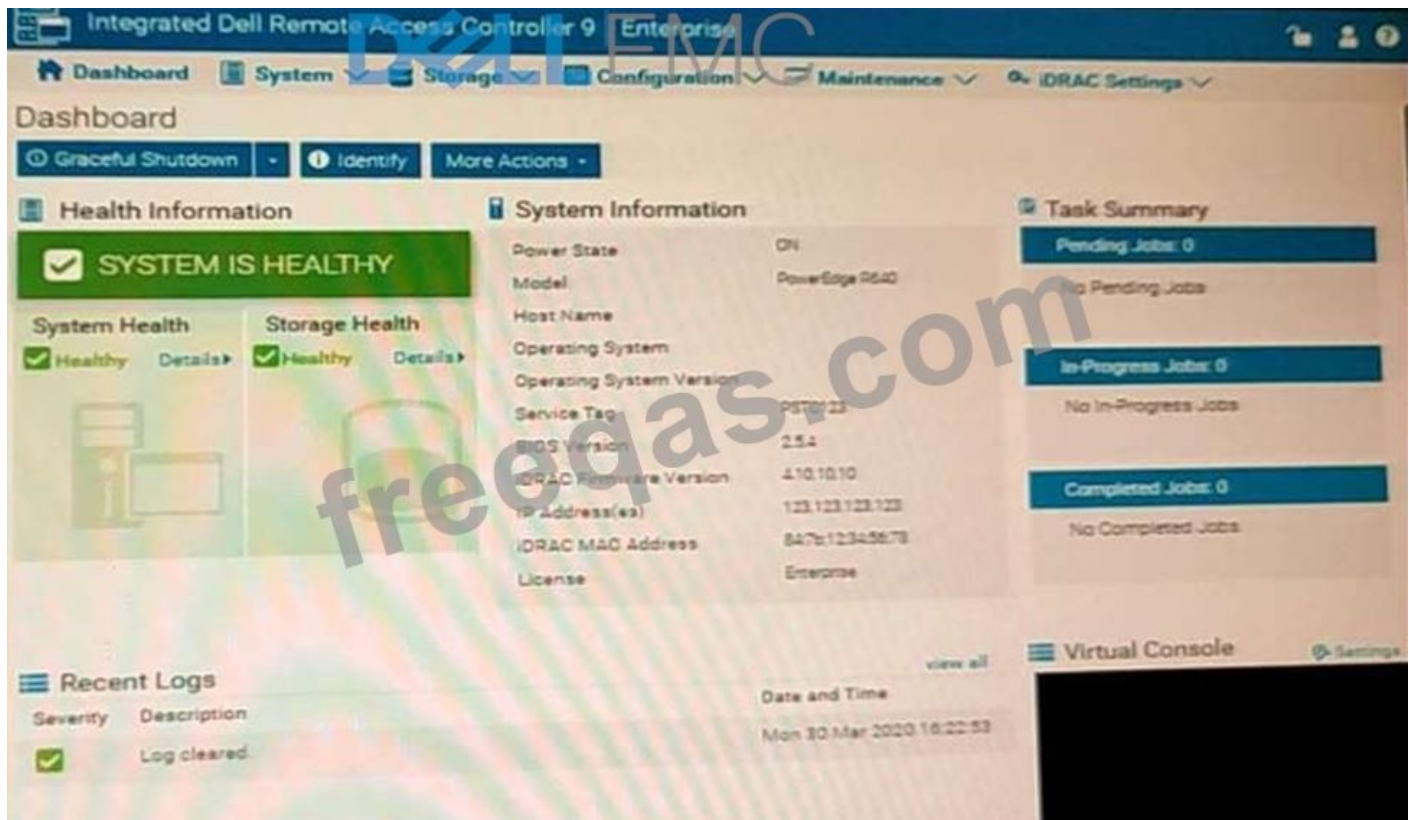

Answer:

Send us your suggestion for this simulation task.

NEW QUESTION: 15

What are key values related to systems management when deploying OpenManage Enterprise with Dell EMC PowerEdge servers?

A. Simplify

Unify

Automate

Secure

B. Simplify

Fee-based license Agent-free Management Secure

C. Automate

Basic Hardware Element Management

Agent-free Management

Simple and effective

D. Simplify

Basic Hardware Element Management

Agent-free Management

Fee-based license

Answer: B (LEAVE A REPLY)

NEW QUESTION: 16

Dell EMC PowerEdge 14G servers support which technology?


- A. AMD GuardMI
- B. iDRAC8
- C. Intel Boot Guard
- D. Quicksync 1.0

Answer: A ([LEAVE A REPLY](#))


Valid DES-4122 Dumps shared by PrepPdf.com for Helping Passing DES-4122 Exam! PrepPdf.com now offer the **newest DES-4122 exam dumps**, the PrepPdf.com DES-4122 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com DES-4122 dumps with Test Engine here:
<https://www.preppdf.com/EMC/DES-4122-prepaway-exam-dumps.html> (62 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 17

What is the correct order of steps taken during the BIOS/UEFI Recovery process?

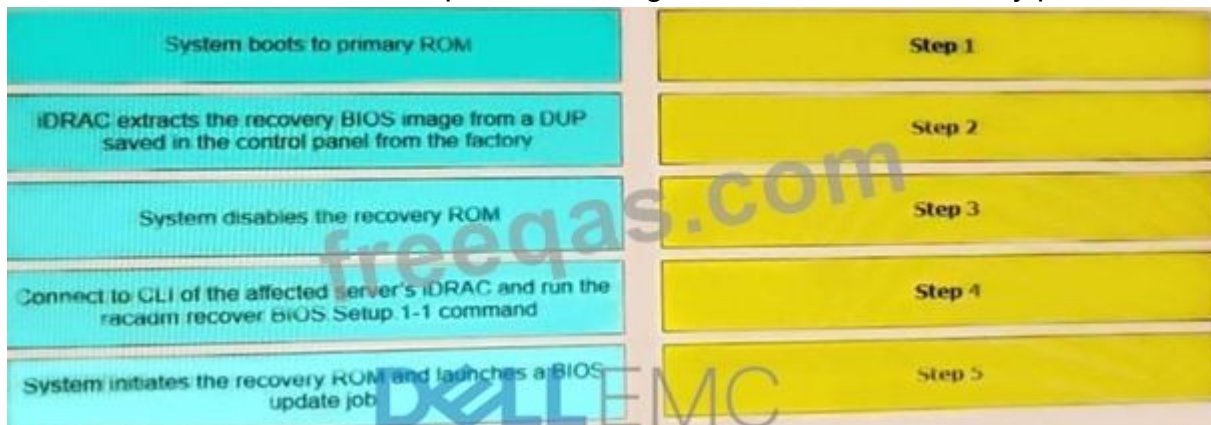

Answer:

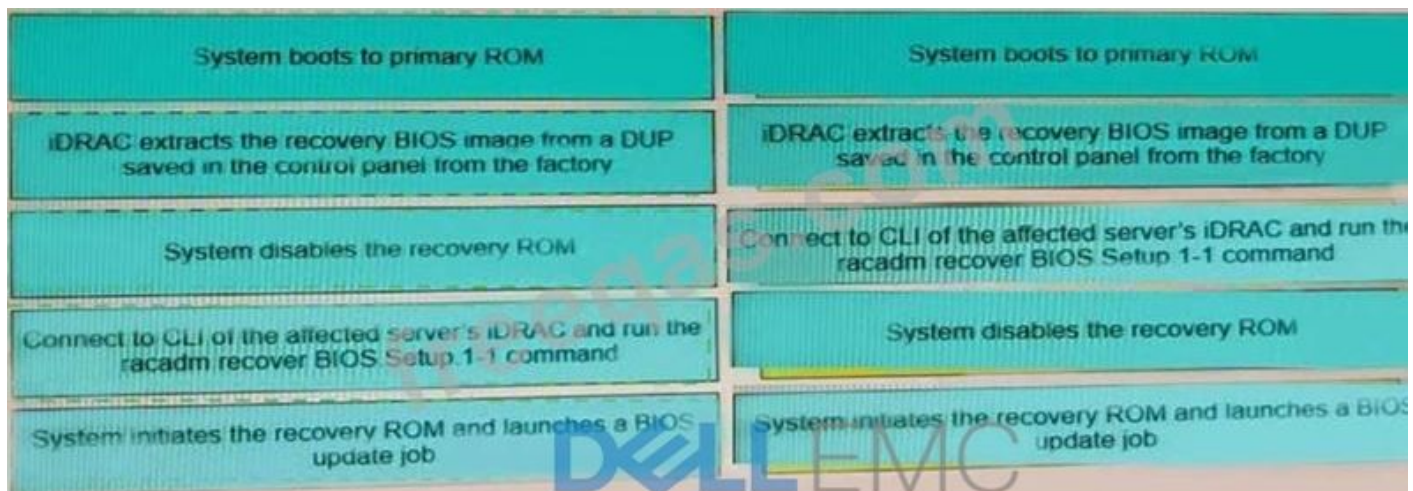

NEW QUESTION: 18

A technician installs eight servers into a fully operational rack with top of rack switch Each server has a quad

1Gb NIC and redundant power supplies The company uses iDRAC in shared LOM mode with LOM1 as the selected NIC What should the technician do to verify iDRAC connectivity on each server?

- A. iDRAC dedicated NIC port is cabled and the link light is green
- B. iDRAC Datacenter license is installed.
- C. Ethernet port LOM1 is cabled and the link light is green.
- D. iDRAC Enterprise license is installed

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 19

What is the Open Compute Project (OCP) card used for in a Dell EMC PowerEdge server?


- A. Consume a PCIe slot
- B. Provide a hot-swap component
- C. Flexibility to choose interconnects
- D. Fixed networking card

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 20


An engineer wants to fully leverage Microsoft Windows Server 2016 for TPM-based guarded host deployment of a 14G server Which BIOS settings need to be used for installing the Windows server?

A)

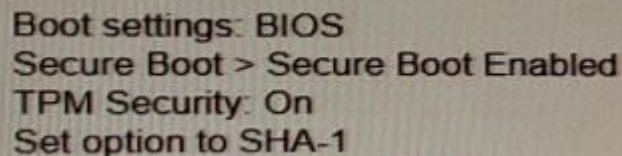


Boot settings: BIOS
Secure Boot > Secure Boot Enabled
TPM Security: On
Set option to SHA-1

B)

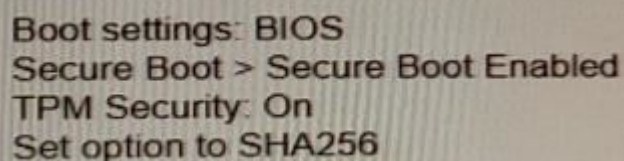


Boot settings: BIOS
Secure Boot > Secure Boot Enabled
TPM Security: On
Set option to SHA256

C)

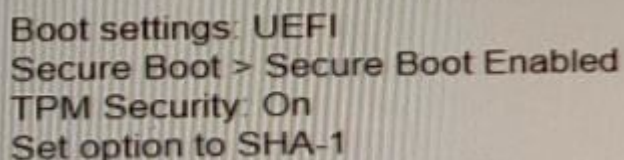

Boot settings: UEFI
Secure Boot > Secure Boot Enabled
TPM Security: On
Set option to SHA-1

D)

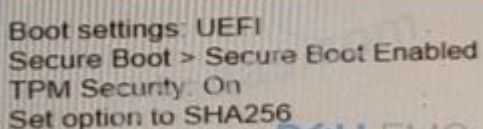

Boot settings: UEFI
Secure Boot > Secure Boot Enabled
TPM Security: On
Set option to SHA256

DELL EMC

- A. Option D
- B. Option C
- C. Option B
- D. Option A

Answer: ([SHOW ANSWER](#))

Valid DES-4122 Dumps shared by PrepPdf.com for Helping Passing DES-4122 Exam!
PrepPdf.com now offer the **newest DES-4122 exam dumps**, the PrepPdf.com DES-4122 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com DES-4122 dumps with Test Engine here:
<https://www.preppdf.com/EMC/DES-4122-prepaway-exam-dumps.html> (62 Q&As Dumps,
40%OFF Special Discount: **Exam-Tests**)