

## Salesforce.OMS-435.v2022-08-21.q26

<b>Exam Code:</b>	OMS-435
<b>Exam Name:</b>	Build Guided Experiences with OmniStudio
<b>Certification Provider:</b>	Salesforce
<b>Free Question Number:</b>	26
<b>Version:</b>	v2022-08-21
<b># of views:</b>	909
<b># of Questions views:</b>	260
<a href="https://www.freeqas.com/qa/Salesforce/OMS-435/Salesforce.OMS-435.v2022-08-21.q26.html">https://www.freeqas.com/qa/Salesforce/OMS-435/Salesforce.OMS-435.v2022-08-21.q26.html</a>	

### NEW QUESTION: 1

A developer has a requirement to create a child FlexCard that contains all of its parent FlexCard's records In a Datable How should the developer configure the parent FlexCard's Node?

- A. {Records}
- B. {Recorded}
- C. {Records{0}}
- D. {Params, records}

**Answer:** ([SHOW ANSWER](#))

### NEW QUESTION: 2

A developer writes an OmniScript that includes a DataRaptor that updates the Account statue based on information provided from the OmniScript. The information must be updated only if the Account record already exists. Otherwise, a new account must be created.

How should the developer accomplish this task?

- A. Check the Upset key and is required for Upsert checkboxes on the Account id field
- B. Check Overwrite Target for all Null input checkbox on the Account id field
- C. Populate the Lookup object and Lookup fields
- D. Check the Upsert key checkbox on the Account Status field

**Answer:** A ([LEAVE A REPLY](#))

### NEW QUESTION: 3

The OmniScript must retrieve device details stored in the Asset object and then call an external system to send troubleshooting commands via REST API to the device.

Which two OmniScript element should the developer use to configure this functionality?

- A. Navigation Action
- B. SOQL Action
- C. HTTP Action

D. REST API Action

E. DataRaptor Extract Action

**Answer: C,E ([LEAVE A REPLY](#))**

**NEW QUESTION: 4**

A developer creates a FlexCard with five state elements. Four of the states have a condition. To test the FlexCard, the developer previews it using sample data that causes two of the states to have true conditions.

In this scenario, how will the developer know which state will display?

**A.** The first state with a true AND condition, regardless of sequence in the FlexCard canvas, will display.

**B.** The first state with true conditions sequence closest to the top of the FlexCard canvas will display.


**C.** The first state with true nested condition, regardless of sequence in the FlexCard canvas, will display

**D.** The state sequenced first in the FlexCard canvas will display.

**Answer: ([SHOW ANSWER](#))**

**NEW QUESTION: 5**

A developer needs to transform contact data into a JSON array.

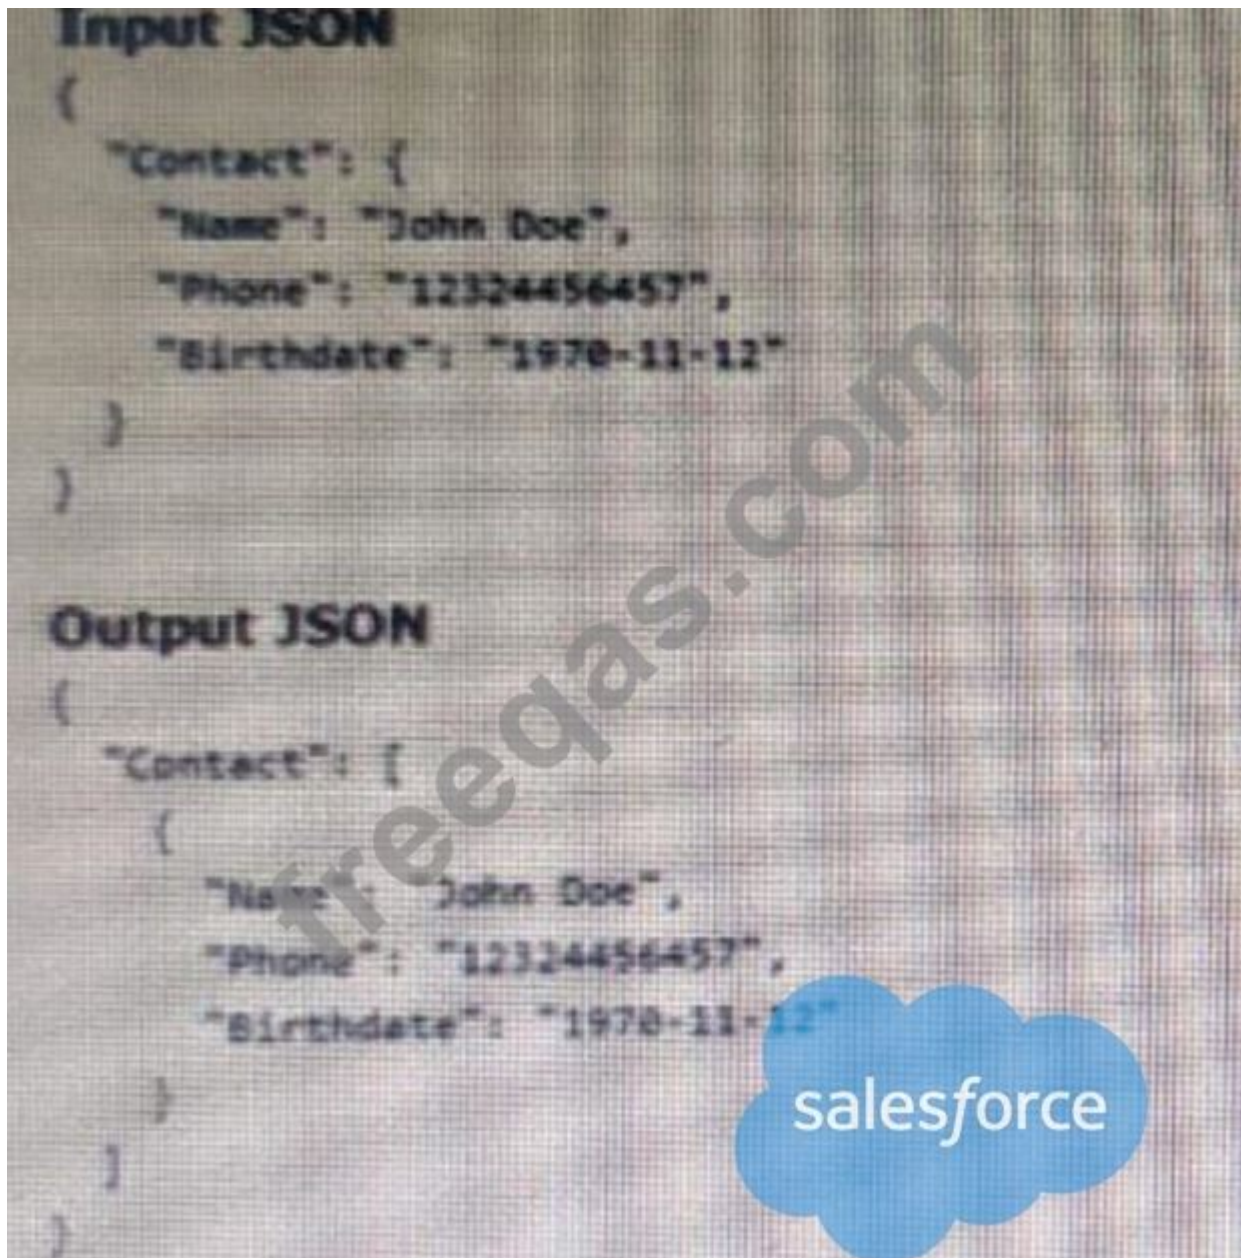

Given the input JSON shown above, what are two ways a developer could configure a DATARaptor transform to achieve the expected Output JSON? Choose 2 answers

- A. Set the Input JSON Path as Contact the out JSON Path as contact and output Data type as List.
- B. Use a formula LIST(Contact), and add the output of the formula as the input in the Transform tab.
- C. Set the Input JSON path as List(Contact) and the OutputJSON Path as Contact.
- D. Set the input JSON Path as Contact and the OutPut JSON Path as List (Contact)

Answer: ([SHOW ANSWER](#))

**NEW QUESTION: 6**

A)

```
"Step1": {
  "Block1": "salesforce",
  "Text1": "Text",
  "Block2": {
    "Telephone1": "1234567890",
    "Checkbox1": false
  }
},
"Block3": {
  "Multi-select1": "Value A;Value B"
}
}
```

B)

```
"Step1": {
  "Block1": "salesforce",
  "Text1": "Text",
  "Telephone1": "1234567890",
  "Block2": {
    "Checkbox1": false
  }
},
"Block3": {
  "Multi-select1": "Value A;Value B"
}
}
```

A. Option A

B. Option B

**Answer: A ([LEAVE A REPLY](#))**

#### NEW QUESTION: 7

A healthcare company wants to enable its subscribers to add, edit, or delete dependents related to their policy Community portal. The developer on the project decides to use an MiniScript. How should the developer configure the OmniScript to provide this functionality?

A. Use an Input Block element and a DataRaptor Post Action element.

B. Use an Edit Block element configured with SOQL statements.

C. Use an Edit Block element configured with Remote Actions.

D. Use a Text Block element and a Remote Action element.

**Answer: ([SHOW ANSWER](#))**

#### NEW QUESTION: 8

A developer needs to create . DataRaptor to retrieve the name of an account for a contact. Following best practices, how should a developer configure the extraction steps?

A. Define extraction steps for the Contact and the Account objects, and set the Extract 3SON Path to Account.Name

B. Define an extraction step for the Account object, and set the Extract JSON Path to AccountContact.Name

C. Define extraction steps for the Contact and the Account objects, and set the Extract JSON Path to Contact Account.Name

D. Define an extraction step for the Contact object and set the Extract JSON Path to Contact Account.Name

Answer: ([SHOW ANSWER](#))

**NEW QUESTION: 9**

A developer creates an OmniScript to update billing information. After analyzing the different types of customer interactions that occur at the company, the developer determines updating billing information should be included in the majority of customer interactions, which are represented by more than 20 different FlexCards.

What is the most efficient way for the developer to configure the action that invokes the OmniScript?

A. As an OmniStudio Action

B. As a Custom Action

C. As an OS Action

D. As a Lightning Action

Answer: C ([LEAVE A REPLY](#))

**NEW QUESTION: 10**

Refer to the exhibit.



A developer has configured an integration Procedure element with SEND/RESPONSE TRANSFORMATIONS as shown.

Alternatively, how could the developer configure Additional input to send exactly the same data? Assume that the developer checked Send Only Additional input.

A)

Key	Value
SecondaryAccount	*DRExtractAction:Account*

B)

Key	Value
DRExtractAction:Account	SecondaryAccount

C)

Key	Value
extractAction:Account	secondaryAccount

- A. Option B
- B. Option A
- C. Option C

**Answer: C** ([LEAVE A REPLY](#))

#### NEW QUESTION: 11

Users receive an APEC CPU limit Exceeded error when running an OmniScript in a Salesforce Community. The OmniScript includes an Integration Procedure that contains two DataRaptors. Which two Location should the developer check to troubleshoot the issue?

Choose 2 answers

- A. Action Debugger
- B. Script configuration
- C. DataRaptor configuration
- D. Community logs

**Answer: (**[SHOW ANSWER](#)**)**

#### NEW QUESTION: 12

A developer needs to change some field labels on a FlexCard. The FlexCard is currently deployed to production. The developer that the best course of action is to version the FlexCard rather than cloning it.

Which factor would lead the developer to this decision?

- A. All instance of the FlexCard must be updated with the changes.
- B. Another team member is developing new action, fields and styling for the current version of the FlexCard.
- C. The new version of the FlexCard will be used in a new Console, and the current version of the FlexCard should remain unchanged.
- D. The new and current versions will be displayed together on the same target.

**Answer: C** ([LEAVE A REPLY](#))

#### NEW QUESTION: 13

In an OmnoScript, a developer needs to configure a Disclosure element to require user input only if the user already checked a Non-Disclosure Agreement Checkbox.

How should the developer configure the conditional view to meet this requirement?

- A. Show element if true
- B. Disable read only if true
- C. Set element to optional if false
- D. Set element to require if true

**Answer: A** ([LEAVE A REPLY](#))

**NEW QUESTION: 14**

A developer is configuring the API URL in an HTTP Action element within an Integration procedure.

What is the merge code syntax for passing a Date node from an element named SetValue in the URL?

- A. %SetValue Date
- B. {(SetValue. Date)}
- C. x%SetValue.Date%
- D. (' Setvalues') [ 'Date']

**Answer: A ([LEAVE A REPLY](#))**

**NEW QUESTION: 15**

A company wants to allow agents to send customers a quote for signature. The quote is a documents created using a DocuSign template that has been prefilled with all of the quote details. The document will be emailed to one or more recipients for signature.


How should a developer configure this functionality in an OmniScript?

- A. Email Action
- B. PDF Acwm
- C. DocuSign Envelope Action
- D. DocuSign Signature Action

**Answer: ([SHOW ANSWER](#))**

**NEW QUESTION: 16**

A developer is creating an OmniScript that provisions trail orgs to their customers. The following text block in the Omniscript uses a merge code to display the ID for the new trail org:

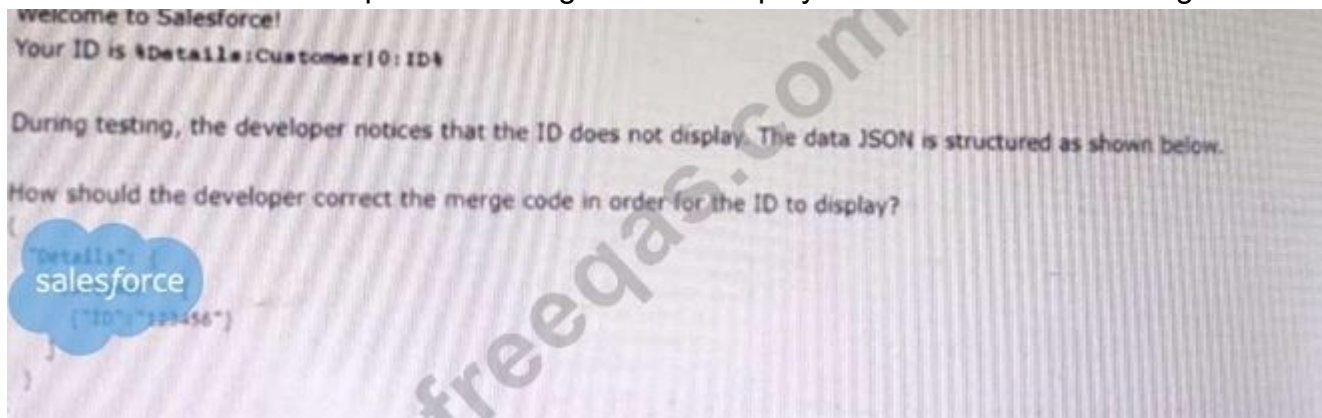

- A. To %sDetails: Customer|0: ID\$
- B. To %Details: Customer|n: ID%
- C. To %%sDetails: Customer|0: ID%%
- D. To %Details: Customer|1: ID%

**Answer: ([SHOW ANSWER](#))**

**Valid OMS-435 Dumps** shared by PrepPdf.com for Helping Passing OMS-435 Exam!  
PrepPdf.com now offer the **newest OMS-435 exam dumps**, the PrepPdf.com OMS-435 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com OMS-435 dumps with Test Engine here:  
<https://www.preppdf.com/Salesforce/OMS-435-prepaway-exam-dumps.html> (85 Q&As Dumps,  
**40%OFF Special Discount: Exam-Tests**)

**NEW QUESTION: 17**

A developer is configuring an integration Procedure Action in an OmniScript. The Omniscript needs a JSON response from the Integration Procedure but does not need to wait for the response for the user to proceed.

Which feature should the developer enable?

- A. Use Future
- B. Invoke Mode Non-Blocking
- C. Toast Completion
- D. Invoke Mode Fire and Forget

**Answer: B (LEAVE A REPLY)**

**NEW QUESTION: 18**

A developer is building an OmniScript and needs to save to Salesforce and to an AWS Order Management system.

Which OmniScript element could save all of this data?

- A. DataRaptor Load Action
- B. Integration Procedure Action
- C. DataRaptor Post Action
- D. HTTP Action

**Answer: B (LEAVE A REPLY)**

**NEW QUESTION: 19**

Which two in an integration Procedure or DataRaptor can execute a function like CONCAT or DATEDIFF?

Choose 2 answers

- A. In a Set Values Action in a Value field.
- B. In a Remote Action in an Additional Output value field.
- C. In a DataRaptor in an Output Tab Output JSON Path.
- D. In a DataRaptor Action in an Input Parameters value field.

**Answer: A,B (LEAVE A REPLY)**

**NEW QUESTION: 20**

A developer is configuring a DataRaptor Load to Save contract dat

- a. The developer needs to set the record type of the contact using DeveloperName.  
Which two configuration actions should the developer take to set this up in the DataRaptor Load?
- A.** Add Link to RecordType object in the Contact Object with the id field of RecordType object.
  - B.** Check is Lookup property when mapping the fields.
  - C.** Select RecordType in the Lookup object list. Development in the lookup Field list, and ID in the Lookup Requested Field list.
  - D.** Select RecordType in the Lookup Object list. ID in the Lookup Field list, and Development in the Lookup requested Field list.

**Answer: B,C (LEAVE A REPLY)**

**NEW QUESTION: 21**

Refer to the exhibit.



The card layout uses an integration Procedure as a data source. The cards use the layout data source.

Which JSON data structure supports this card layout and follows best practices?

A)



B)

```

{
  "Contact": [
    {
      "CellPhone": "(212) 154-8562",
      "Name": "Edward Stamos"
    },
    {
      "CellPhone": "(650) 156-1102",
      "Name": "Howard Jones"
    }
  ],
  "AccountPhone": "2221546450",
  "AccountName": "Acme"
}

```

C)

```

{
  "Account": {
    "Phone": "2221546450",
    "Name": "Acme"
  },
  "ContactCellPhone": "(212) 154-8562",
  "ContactName": "Edward Stamos"
},
{
  "Account": {
    "Phone": "2221546450",
    "Name": "Acme"
  },
  "ContactCellPhone": "(650) 156-1102",
  "ContactName": "Howard Jones"
}
}

```

- A. Option C
- B. Option A
- C. Option B

**Answer: A** ([LEAVE A REPLY](#))

**NEW QUESTION: 22**

An OmniScript displays data from an API using Integration Procedure, but some of the data is missing.

Which two configuration errors could cause this? Choose 2 answers

- A. The element name for the missing data does not match the JSON node key in the Integration Procedure Response.
- B. The missing data is trimmed in the Integration Procedure Action Response JSON Path.
- C. The Integration Procedure Preview Input Parameters do not match the JSON sent from the OmniScript.
- D. The JSOW sent from the Integration Procedure Action does not match any of the Original Input for the Integration Procedure

Answer: ([SHOW ANSWER](#))

**NEW QUESTION: 23**

A developer is building an OmniScript and needs to retrieve data from Salesforce and from an on-premises billing database.

Which two OmniScript elements could retrieve this data?

Choose 2 answers

- A. DataRaptor Extract Action
- B. HTTP Action
- C. Response Action
- D. Navigate Action

Answer: ([SHOW ANSWER](#))

**NEW QUESTION: 24**

..... configure Additional input to send exactly the same data? Assume that the develop checked Send Only Additional input.



A)

Key	Value
SecondaryAccount	↳DRExtractAction:Account↳

B)

Key	Value
DRExtractAction:Account	SecondaryAccount

C)

Key	Value
<DRExtractAction:Account>	SecondaryAccount

D)

Key	Value
SecondaryAccount	DRExtractAction:Account

- A. Option A
- B. Option D
- C. Option C
- D. Option B

**Answer:** ([SHOW ANSWER](#))

#### NEW QUESTION: 25

A developer configure a Flexcard with a DataRaptor data source that uses the params.id as an. When the developer clicks Views Data on the FlexCard, valid data displays. However, when the developer previews the layout, the FlexCard does not display. What could cause this error?

Choose 2 answers

- A. The attribute haven't been configured to pass the data to the fields.
- B. There is not Salesforce record for the FlexCard based on the RecordId in the layout's Test Data Source Settings.
- C. The Data Node field for the FlexCard is empty.
- D. The RecordId in the Test Data Source settings ins for the wrong record type.

**Answer:** A,D ([LEAVE A REPLY](#))

#### NEW QUESTION: 26

A developer needs to limit the of a DataRaptor Extract to a maximum of one result.

How should the developer configure this?

- A. Define a formula with the Filter function
- B. Use a Custom Output Type when creating the DataRaptor
- C. Set the Limit Property on the Action that calls the DataRaptor Extract.
- D. Use the LIMIT filter on the Extract definition

**Answer:** ([SHOW ANSWER](#))

**Valid OMS-435 Dumps** shared by PrepPdf.com for Helping Passing OMS-435 Exam! PrepPdf.com now offer the **newest OMS-435 exam dumps**, the PrepPdf.com OMS-435 exam **questions have been updated** and **answers have been corrected** get the **newest** PrepPdf.com OMS-435 dumps with Test Engine here:

<https://www.preppdf.com/Salesforce/OMS-435-prepaway-exam-dumps.html> (85 Q&As Dumps,  
**40%OFF** Special Discount: **Exam-Tests**)